



2/24/00

A

005702-20068

Express Mail Label No. EL368584970US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Anticipated Classification of this Application:

☐ Class ☐ Subclass

Prior Application

Examiner: H. Nguyen

Art Unit: 2784

Jc525 U.S. PTO
09/511620



CONTINUATION APPLICATION TRANSMITTAL

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

This is a request for filing a continuation application pursuant to 37 C.F.R. § 1.53(b), of pending prior application:

Serial No. **08/865,371** filed May 29, 1997, by **Tomomi Momohara** (inventor currently of record in prior application) for **SEMICONDUCTOR INTEGRATED CIRCUIT DEVICE AND METHOD OF TESTING THE SAME**.

1. ☒ Enclosed is a copy of the prior application, including the oath or declaration as originally filed, or a replacement specification which does not add new matter.
2. ☒ The filing fee is calculated below:

CALCULATION OF FEES								
ITEM		TOTAL NO. OF CLAIMS		NO. OF CLAIMS OVER BASE	LG/SM \$ ENTITY FEE		\$ AMOUNT	\$ FEE
A	TOTAL CLAIMS FEE	21	-20	1	LG=\$18 SM=\$9	\$	\$18	
B	INDEPENDENT CLAIMS FEE*	7	-3	4	LG=\$78 SM=\$39	\$	\$312	
C	SUBTOTAL - ADDITIONAL CLAIMS FEE (ADD FINAL COLUMN IN LINES A + B)							\$ 330
D	MULTIPLE-DEPENDENT CLAIMS FEE				LARGE ENTITY FEE = \$260 SMALL ENTITY FEE = \$130		\$ 0	
E	BASIC FEE				LARGE ENTITY FEE = \$690 SMALL ENTITY FEE = \$345		\$ 690	
F	TOTAL FILING FEE (ADD TOTALS FOR LINES C, D, AND E)							\$ 1020
	*LIST INDEPENDENT CLAIMS							

3. ☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Account No. 12-1820. A copy of this sheet is enclosed.

4. ☒ A check in the amount of \$ 1,020.00 is enclosed.
5. ☒ Cancel in this application original claims 5-19 of the prior application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
6. ☒ Amend the specification by inserting before the first line the sentence:

--This is a ☒ continuation ☐ division of application Serial No. 08/865,371 filed May 29, 1997, which application is hereby incorporated by reference in its entirety.--
- 7a. ☒ New formal drawings are enclosed.
- 7b. ☒ Priority of:

Japanese patent application Serial No. 8-136892 filed May 30, 1996 and Japanese patent application Serial No. 113900 filed May 1, 1997 is claimed under 35 U.S.C. § 119.
- 7c. ☒ The certified copies of the priority applications were filed in prior application Serial No. 08/865,371, filed May 29, 1997.
8. ☒ The prior application is assigned of record to: Kabushiki Kaisha Toshiba.
9. ☒ The power of attorney in the prior application is as listed on the attached copy of the declaration filed in the patent application.
- a. ☒ The power appears in the original papers in the prior application.
- b. ☐ Since the power does not appear in the original papers, a copy of the power in the prior application is enclosed.
- c. ☒ Address all future communications to:


William H. Wright, Esq. (RN 36,312)
LOEB & LOEB LLP
10100 Santa Monica Blvd., 22nd Floor
Los Angeles, CA 90067-4164
310-282-2260
- 10a. ☒ A preliminary amendment is enclosed. (Claims added by this amendment have been properly numbered consecutively beginning with the number next following the highest numbered original claim in the prior application.)
- 10b. ☐ A separate check for \$____ is enclosed to cover additional claims added by the preliminary amendment.

11. ☐ Enclosed find the following declaration(s) in support of Small Entity status for this application:

- ☐ Inventor(s)
- ☐ Individual other than inventor
- ☐ Nonprofit organization
- ☐ Small business concern

12. ☐ The statement(s) of Small Entity Status filed in the prior application is (are) still proper.

Date: 23 February 2000



WILLIAM H. WRIGHT
Registration No. 36,312

10100 Santa Monica Blvd., 22nd Floor
Los Angeles, California 90067-4164
Telephone: 310-282-2260
Facsimile: 310-282-2192

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of:

MOMOHARA

Serial No: Not yet assigned

Filed: February 23, 2000

For: **SEMICONDUCTOR INTEGRATED
CIRCUIT DEVICE AND METHOD OF
TESTING THE SAME**

Art Unit: 2784

Examiner: H. Nguyen

CERTIFICATE OF MAILING VIA U.S. EXPRESS MAIL
"Express Mail" Mailing Label No. EL368584970US
Date of Deposit: February 23, 2000

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

I hereby certify that

- ☒ two copies of a letter of transmittal
- ☒ check in amount of \$ 1,020.00 as filing fee
- ☒ patent application (123 pages of specification; 19 claims; 1 page of abstract
- ☒ 51 sheets of formal drawings
- ☒ executed Declaration and Power of Attorney
- ☒ assignment of the invention to Kabushiki Kaisha Toshiba
- ☐ Verified Statement (Declaration) Claiming Small Entity Status
- ☒ Preliminary Amendment
- ☒ Information Disclosure Statement with 0 references
- ☒ return postcard

are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service with sufficient postage under 37 C.F.R. § 1.10 on the date indicated above and are addressed to:

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231.

Date: February 23, 2000

10100 Santa Monica Blvd., 22nd Floor
Los Angeles, California 90067-4164
Telephone: 310-282-2000
Facsimile: 310-282-2192

Sherry J. Batalla
Name of person mailing papers


Signature

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of:

MOMOHARA

Serial No: Not yet assigned

Filed: February 23, 2000

For: ***SEMICONDUCTOR INTEGRATED
CIRCUIT DEVICE AND METHOD
OF TESTING THE SAME***

Art Unit: 2784

Examiner: H. Nguyen

PRELIMINARY AMENDMENT

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

Prior to the first office Action in the present application, please enter and consider the following amendments and remarks:

IN THE SPECIFICATION:

Please amend the specification by inserting before the first line the sentence:

--This is a continuation of application Serial No. 08/865,371 filed May 29, 1997, which application is hereby incorporated by reference in its entirety.--

IN THE CLAIMS:

Please cancel claims 1-4 without prejudice.

Please add new claims 20-40 as follows:

--20. A semiconductor device comprising:

a semiconductor substrate of a first conductivity type;

at least one first well of a second conductivity type formed in the semiconductor substrate; and

at least one second well of the first conductivity type formed in at least one first well, wherein

the semiconductor device is composed of semiconductor circuits each formed in at least one first well and at least one second well.

21. A semiconductor device comprising:

a semiconductor substrate of a first conductivity type;

at least one first well of a second conductivity type formed in the semiconductor substrate;

at least one second well of the first conductivity type formed in at least one first well; and

at least one third well of the second conductivity type formed in at least one second well,

wherein

the semiconductor device is composed of semiconductor circuits each formed in at least one first well, at least one second well and at least one third well.

22. A semiconductor device comprising:

a semiconductor substrate of a first conductivity type;

at least one first well of a second conductivity type formed in the semiconductor substrate; and

at least one second well of the first conductivity type formed in at least one first well,

wherein

the semiconductor device is structured by further including at least a processor circuit and a memory circuit formed in at least one first well and at least one second well.

23. A semiconductor device comprising:
a semiconductor substrate of a first conductivity type;
at least one first well of a second conductivity type formed in the semiconductor substrate; and
at least one second well of the first conductivity type formed in at least one first well,
wherein
the semiconductor device is structured by further including at least a processor circuit and an analog circuit formed in at least one first well and at least one second well.

24. A semiconductor device comprising:
a semiconductor substrate of a first conductivity type;
at least one first well of a second conductivity type formed in the semiconductor substrate; and
at least one second well of the first conductivity type formed in at least one first well,
wherein
the semiconductor device is structured by further including at least a nonvolatile type memory circuit and another type of memory circuit formed in at least one first well and at least one second well.

25. A semiconductor device comprising:
a semiconductor substrate of a first conductivity type;
at least one first well of a second conductivity type formed in the semiconductor substrate; and
at least one second well of the first conductivity type formed in at least one first well,
wherein
the semiconductor device structured, as a whole, as a memory circuit, by further including semiconductor elements formed in at least one first well and at least one second well.

26. A semiconductor device comprising:
a semiconductor substrate of a first conductivity type;
at least one first well of a second conductivity type formed in the semiconductor substrate;
at least one second well of the first conductivity type formed in at least one first well;
integrated circuits formed in at least one first well and at least one second well, the integrated circuits including at least one of a processor circuit, a memory circuit, an analog circuit and a logic circuit; and
power sources each used in one of the integrated circuits.

27. The semiconductor device according to claim 20, wherein potentials different from each other are supplied to the first and second wells.

28. The semiconductor device according to claim 21, wherein potentials different from each other are supplied to the first and second wells.

29. The semiconductor device according to claim 22, wherein potentials different from each other are supplied to the first and second wells.

30. The semiconductor device according to claim 23, wherein potentials different from each other are supplied to the first and second wells.

31. The semiconductor device according to claim 24, wherein potentials different from each other are supplied to the first and second wells.

32. The semiconductor device according to, claim 25, wherein potentials different from each other are supplied to line first and second wells.

33. The semiconductor device according to claim 26, wherein potentials different from each other are supplied to the first and second wells.

34. The semiconductor device according to claim 20, wherein potentials different from each other are supplied to the first, second and third wells.

35. The semiconductor device according to claim 21, wherein potentials different from each other are supplied to the first, second and third wells.

36. The semiconductor device according to claim 22, wherein potentials different from each other are supplied to the first, second and third wells.

37. The semiconductor device according to claim 23, wherein potentials different from each other are supplied to the first, second and third wells.

38. The semiconductor device according to claim 24, wherein potentials different from each other are supplied to the first, second and third wells.

39. The semiconductor device according to claim 25, wherein potentials different from each other are supplied to the first, second and third wells.

40. The semiconductor device according to claim 26, wherein potentials different from each other are supplied to the first, second and third wells.--

REMARKS

Claims 20-40 are pending in the application. Action on the merits is respectfully requested.


If for any reason the Examiner finds the application other than in condition for allowance, the Examiner is requested to call the undersigned attorney at the Los Angeles, California telephone number 310-282-2260 to discuss the steps necessary for placing the application in condition for allowance.

Respectfully submitted,

LOEB & LOEB LLP

Date: 23 February 2000

By:



WILLIAM H. WRIGHT

Registration No. 36,312

Attorney for Applicants

10100 Santa Monica Blvd., 22nd Floor
Los Angeles, California 90067-4164
Telephone: 310-282-2260
Facsimile: 310-282-2192

005702D5573

- 1 -

TITLE OF THE INVENTION

SEMICONDUCTOR INTEGRATED CIRCUIT DEVICE AND METHOD OF
TESTING THE SAME

BACKGROUND OF THE INVENTION

5 The present invention relates to a 1-chip type
semiconductor integrated circuit (IC) device in which
a plurality of functional circuits having different
functions are integrated.

10 In the field of personal computers, mobile phones,
game devices, etc. which use semiconductor devices,
there is a great demand for an increase in the number
of functions and a reduction in size and cost.

15 As the number of functions increases, the struc-
ture of the system becomes complex. As the system
comes complex, a semiconductor device having various
functions is required and a memory having a large
capacity is needed. Thus, the number of single-unit
semiconductor devices necessary for constructing the
system increases.

20 There is a tendency that a greater number of
functions are integrated in a 1-chip semiconductor
device and the size of the 1-chip semiconductor device
decreases. The same applies to a memory device. The
capacity of a 1-chip memory increases while the size
25 of the 1-chip memory decreases.

 However, the increase in the number of functions
is rapid while the decrease in size is slow.

Recently, a multi-chip module wherein semiconductor chips with different functions are packed has been developed, thereby advancing the reduction in size of the semiconductor product. In the multi-chip module, good-quality semiconductor chips are packed. As compared to the manufacture of a single-unit semiconductor device, an assembly step for assembling good-quality semiconductor chips needs to be provided. In the assembly step, if a defect in connection occurs, the produced device may become defective even if good-quality semiconductor chips are contained, and the reduction in manufacturing cost is prevented. This being the case, it cannot be said that the multi-chip module meets the demand for reduction in cost.

Under the circumstances, a so-called "system-on-silicon" technique, in which a plurality of functional circuits having different functions are integrated into only one semiconductor chip, has recently been developed. It is possible that the system-on-silicon technique will meet all requirements for the increase in the number of functions and the reduction in size and cost.

BRIEF SUMMARY OF THE INVENTION

There are the following technical problems to be solved in the field of the system-on-silicon technique:

- (1) The characteristics of a plurality of functional circuits with different functions, which

are integrated into one semiconductor chip, need to be exactly measured in tests; and

(2) A plurality of functional circuits with different functions need to be integrated into one semiconductor chip, with their characteristics brought
5 out as much as possible.

The present invention has been made in consideration of the above circumstances, and a first object of the present invention is to provide a semiconductor
10 integrated circuit device, wherein the characteristics of a plurality of functional circuits with different functions, which are integrated into one semiconductor chip, can be exactly measured in tests.

A second object of the invention is to provide
15 a semiconductor integrated circuit device, wherein a plurality of functional circuits with different functions need to be integrated into one semiconductor chip, with their characteristics brought out as much as possible.

A third object of the present invention is to
20 provide a method of testing a semiconductor integrated circuit device, wherein the characteristics of a plurality of functional circuits with different functions, which are integrated into one semiconductor
25 chip, can be exactly measured.

A fourth object of the invention is to provide a semiconductor integrated circuit device wherein the

characteristics of a plurality of semiconductor
integrated circuits formed on a single wafer can be
measured in a test at a time with high precision,
with an electrical interference, in particular, an
5 interference between supply voltages, among the
semiconductor integrated circuits being suppressed.

A fifth object of the invention is to provide a
tester for a semiconductor integrated circuit device
wherein static consumption current characteristics of a
10 plurality of semiconductor integrated circuits formed
on a single wafer can be measured in a test at a time
with high precision.

In order to achieve the first object of the
invention, there is provided a semiconductor integrated
15 circuit device having integrated circuits with differ-
ent functions integrated into one semiconductor chip,
the semiconductor integrated circuit device comprising:
a semiconductor chip; a separating region, formed in
the semiconductor chip, for separating the semiconduc-
20 tor chip into a plurality of integrated circuit
formation regions, the separating region being exposed
to entire side faces of the semiconductor chip; and
integrated circuits formed in the integrated circuit
formation regions, respectively, the integrated
25 circuits having different functions, at least one
of the integrated circuits performing a function
fluctuating a potential of the integrated circuit

formation region in which the at least one of the integrated circuits is formed.

In this invention, an integrated circuit operating to fluctuate a potential of an integrated circuit formation region in which the integrated circuit itself is formed is separated from the other integrated circuits by a separating region, so that a fluctuation in potential of the integrated circuit formation region may not be transmitted to the other integrated circuit formation regions. Thereby, the characteristics of a plurality of functional circuits with different functions, which are integrated into one semiconductor chip, can be exactly measured in tests.

The separating region is put in contact with the entire side surface of a semiconductor chip so that a fluctuation in potential of the integrated circuit formation region of the chip may not be transmitted to the integrated circuit formation regions of the other chips. Thereby, even if a plurality of chips formed on a single wafer are tested at a time, the characteristics of integrated circuits of each chip can be exactly measured.

In order to achieve the second object of the invention, this invention provides a semiconductor integrated circuit device having integrated circuits with different functions integrated into one semiconductor chip, the semiconductor integrated

circuit device comprising: a semiconductor chip; a
separating region, formed in the semiconductor chip,
for separating the semiconductor chip into a plurality
of integrated circuit formation regions, the separating
5 region being exposed to entire side faces of the
semiconductor chip; and

integrated circuits formed in the integrated
circuit formation regions, respectively, the integrated
circuits having dedicated power supplies.

10 In this invention, each of integrated circuits
formed on a semiconductor chip is provided with a
dedicated power supply, and the dedicated power
supplies of the integrated circuits are set at such
values as to bring out the characteristics of the
15 individual integrated circuits as much as possible.
Thereby, the integrated circuits with different func-
tions can be integrated into one semiconductor chip,
with their characteristics brought out as much as
possible.

20 In order to achieve the third object of the
invention, there is provided a method of testing a
semiconductor integrated circuit device comprising a
semiconductor chip; a separating region, formed in the
semiconductor chip, for separating the semiconductor
25 chip into a plurality of integrated circuit formation
regions, the separating region being exposed to entire
peripheral side faces of the semiconductor chip; and

integrated circuits formed in the integrated circuit formation regions, respectively, the integrated circuits having dedicated power supplies, wherein while at least one of the integrated circuits is being
5 tested, power is supplied to only the integrated circuit being tested, and no power is supplied to the other integrated circuits.

In this invention, the dedicated power supplies are turned on/off in accordance with tests of integrated circuits. Thereby, the characteristics of a
10 plurality of functional circuits with different functions, which are mounted on a single semiconductor chip in a hybrid manner, can be exactly measured.

In order to achieve the fourth object, this
15 invention provides a semiconductor integrated circuit comprising device: a semiconductor substrate of a first conductivity type; at least one first well of a second conductivity type, formed in the semiconductor substrate; an integrated circuit formed in the first
20 well; a power supply system including a high-potential power line and a low-potential power line for supplying an operational voltage to the integrated circuit; a bias system for supplying a bias potential to the semiconductor substrate, the bias system including a
25 bias line separated from the high-potential power line and the low-potential power line; a first pad connected to the bias line; a second pad connected to the

high-potential power line; and a third pad connected to the low-potential power line.

In this invention, a bias system for applying a bias potential to a semiconductor substrate is separated from power supply systems for supplying operating voltages to integrated circuits, so that the power supply systems of the respective chips formed on a single wafer may not be interconnected via the semiconductor substrate. Thereby, in particular, a problem in which a power ripple of each chip becomes high-frequency wave can be solved, and the characteristics of semiconductor integrated circuit devices (chips) can be measured with high precision.

In order to achieve the fifth object, this invention provides a tester for a semiconductor integrated circuit, the tester comprising: a supply voltage generator, associated with a plurality of semiconductor integrated circuit device chips to be tested at a time, for generating a supply voltage for operating integrated circuits on each semiconductor integrated circuit device chip; a detector for detecting a variation in supply voltage for each semiconductor integrated circuit device chip, while the semiconductor integrated circuit device chips are being tested; a determination device for determining whether the variation in supply voltage detected for each chip falls within a predetermined range of allowance; and

a shut-off device for shutting off, when it has been determined that the variation in supply voltage detected for each chip falls outside the predetermined range of allowance, the supply of the supply voltage to the chip with the variation in supply voltage outside the predetermined range of allowance.

In this invention, the shut-off device shuts off the supply of power voltage to a chip which has caused a fluctuation of power voltage outside a predetermined range of allowance, thereby stopping the operation of the chip and preventing a great ripple from occurring in the power supplies of the other chips. Thereby, the static consumption current characteristics of semiconductor integrated circuit devices (chips) can be measured with high precision.

Additional objects and advantages of the invention will be set forth in the description which follows, and in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention may be realized and obtained by means of the instrumentalities and combinations particularly pointed out in the appended claims.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate presently preferred embodiments of the invention,

and together with the general description given above and the detailed description of the preferred embodiments given below, serve to explain the principles of the invention.

5 FIG. 1A is a plan view showing a semiconductor integrated circuit (IC) device according to a first embodiment of the present invention;

 FIG. 1B is a cross-sectional view taken along line 1B-1B in FIG. 1A;

10 FIG. 1C is a cross-sectional view taken along line 1C-1C in FIG. 1A;

 FIG. 2 is a plan view of a wafer on which semiconductor IC chips according to the first embodiment are formed;

15 FIG. 3A is a plan view of a region shown by a dot-and-dash-line in FIG. 2;

 FIG. 3B is a cross-sectional view taken along line 3B-3B in FIG. 3A;

20 FIG. 3C is a cross-sectional view taken along line 3C-3C in FIG. 3A;

 FIG. 4 is a plan view of the semiconductor IC device according to the first embodiment, which is being tested;

 FIG. 5 shows a wafer probing test system;

25 FIG. 6 is a cross-sectional view of a semiconductor IC device according to a second embodiment of the invention;

FIG. 7 is a cross-sectional view of a well 22-2 in FIG. 6;

FIG. 8 is a cross-sectional view of a well 22-3 in FIG. 6;

5 FIG. 9A is a cross-sectional view of a well 22-4 in FIG. 6;

FIG. 9B is a cross-sectional view of the well 22-4 in FIG. 6;

10 FIG. 10A is a cross-sectional view of a well 22-5 in FIG. 6;

FIG. 10B is a cross-sectional view of the well 22-5 in FIG. 6;

15 FIG. 11 is a block diagram of a power supply system provided in the device according to the second embodiment of the invention;

FIG. 12A is a timing chart illustrating the generation timing of external and internal powers at the time of use;

20 FIG. 12B is a timing chart illustrating the generation timing of external and internal powers at the time of tests;

FIG. 12C is a timing chart illustrating the generation timing of external and internal powers at the time of tests;

25 FIG. 13 is a cross-sectional view of a semiconductor IC device according to a third embodiment of the invention;

FIG. 14A is a cross-sectional view of a well 22-2 in FIG. 13;

FIG. 14B is a cross-sectional view of the well 22-2 in FIG. 13;

5 FIG. 15 is a cross-sectional view of a semiconductor IC device according to a fourth embodiment of the invention;

FIG. 16A is a cross-sectional view of a well 22-4 in FIG. 15;

10 FIG. 16B is a cross-sectional view of the well 22-4 in FIG. 15;

FIG. 17 is a cross-sectional view of a semiconductor IC device according to a fifth embodiment of the invention;

15 FIG. 18A is a cross-sectional view of wells 22A-4 and 22B-4 in FIG. 17;

FIG. 18B is a cross-sectional view of the wells 22A-4 and 22B-4 in FIG. 17;

20 FIG. 19 is a cross-sectional view of a semiconductor IC device according to a sixth embodiment of the invention;

FIG. 20A is a cross-sectional view of wells 22A-5 and 22B-5 in FIG. 19;

25 FIG. 20B is a cross-sectional view of the wells 22A-5 and 22B-5 in FIG. 19;

FIG. 21A is a plan view of a semiconductor IC device according to a seventh embodiment of the

invention;

FIG. 21B is a cross-sectional view taken along
line 21B-21B in FIG. 21A;

FIG. 21C is a cross-sectional view taken along
5 line 21C-21C in FIG. 21A;

FIG. 22A is a cross-sectional view of a semicon-
ductor IC device according to an eighth embodiment of
the invention;

FIG. 22B is a cross-sectional view of the
10 semiconductor IC device according to the eighth
embodiment of the invention;

FIG. 23 is a cross-sectional view of a well 22-6
shown in FIGS. 22A and 22B;

FIG. 24 is a cross-sectional view of a well 22-7
15 in FIGS. 22A and 22B;

FIG. 25A is a plan view of a semiconductor IC
device according to a ninth embodiment of the
invention;

FIG. 25B is a cross-sectional view taken along
20 line 25B-25B in FIG. 25A;

FIG. 25C is a cross-sectional view taken along
line 25C-25C in FIG. 25A;

FIG. 26 is a cross-sectional view of a semicon-
ductor IC device according to a tenth embodiment of the
25 invention;

FIG. 27 is a cross-sectional view of a well 22-8
in FIG. 26;

FIG. 28 is a plan view showing the state in which a semiconductor IC device according to an eleventh embodiment is being tested;

5 FIG. 29 is a plan view showing a basic structure of a semiconductor integrated circuit (IC) device chip according to the first to eleventh embodiments;

FIG. 30 schematically shows the state in which the chip shown in FIG. 29 is subjected to a multiple test;

10 FIG. 31 is an equivalent circuit diagram of the structure shown in FIG. 30;

FIG. 32 shows a power ripple of each chip shown in FIG. 30;

15 FIG. 33 shows a system configuration of a test system according to a twelfth embodiment of the invention;

FIG. 34 is a plan view showing a basic structure of a semiconductor IC device according to a 13th embodiment of the invention;

20 FIG. 35 schematically shows the state in which the chip shown in FIG. 34 is subjected to a multiple test;

FIG. 36 is an equivalent circuit diagram of the structure shown in FIG. 35;

FIG. 37 shows a power ripple of each chip shown in FIG. 35;

25 FIG. 38 is a plan view showing the state in which the semiconductor IC device chip according to the 13th embodiment of the invention is formed on the wafer 11;

FIG. 39 is a plan view of a packaged chip of the semiconductor IC device according to the 13th embodiment of the invention;

FIG. 40 shows a system configuration of a test
5 system according to a 14th embodiment of the invention;

FIG. 41 shows the structure of a tester according to a 15th embodiment of the invention;

FIG. 42A is a plan view of a semiconductor IC device according to a 16th embodiment of the invention;

10 FIG. 42B is a cross-sectional view taken along line 42B-42B in FIG. 42A;

FIG. 43A is a plan view of a semiconductor IC device according to a 17th embodiment of the invention;

15 FIG. 43B is a cross-sectional view taken along line 43B-43B in FIG. 43A;

FIG. 44A is a plan view of a semiconductor IC device according to an 18th embodiment of the invention;

20 FIG. 44B is a cross-sectional view taken along line 44B-44B in FIG. 44A;

FIG. 45A is a plan view of a semiconductor IC device according to a 19th embodiment of the invention;

FIG. 45B is a cross-sectional view taken along line 45B-45B in FIG. 45A;

25 FIG. 46A is a plan view of a semiconductor IC device according to a 20th embodiment of the invention;

FIG. 46B is a cross-sectional view taken along

line 46B-46B in FIG. 46A;

FIG. 47 is a plan view of a semiconductor IC device according to a 21st embodiment of the invention;

FIG. 48A schematically shows a system constituted
5 by using a semiconductor IC device according to a 22nd embodiment of the invention, wherein products with equal power voltage levels are connected;

FIG. 48B schematically shows a system constituted
10 by using the semiconductor IC device according to the 22nd embodiment of the invention, wherein products with different power voltage levels are connected.

FIG. 49A is a plan view of a semiconductor IC device according to a 22nd embodiment of the invention;

FIG. 49B is a cross-sectional view taken along
15 line 49B-49B in FIG. 49A;

FIG. 50A shows the structure of a well-bias potential switching circuit included in the semiconductor IC device according to the 22nd embodiment;

FIG. 50B shows a relationship between supply
20 voltage and well-bias potential;

FIG. 51 shows an input circuit and an output circuit included in the semiconductor IC device according to the 22nd embodiment of the invention;

FIG. 52A is a cross-sectional view of the output
25 circuit shown in FIG. 51;

FIG. 52B is a cross-sectional view of the input circuit shown in FIG. 51;

FIG. 53A is a plan view of a semiconductor IC device according to a 23rd embodiment of the invention;

FIG. 53B is a cross-sectional view taken along line 53B-53B in FIG. 53A;

5 FIG. 54A is a plan view of a semiconductor IC device according to a 24th embodiment of the invention;

FIG. 54B is a cross-sectional view taken along line 54B-54B in FIG. 54A;

10 FIG. 55A is a plan view of a semiconductor IC device according to a 25th embodiment of the invention;

FIG. 55B is a cross-sectional view taken along line 55B-55B in FIG. 55A;

FIG. 56A is a plan view of a semiconductor IC device according to a 26th embodiment of the invention;

15 FIG. 56B is a cross-sectional view taken along line 56B-56B in FIG. 56A;

FIG. 57A is a plan view of a wafer on which a plurality of non-volatile chips are formed, illustrating a multi-test method for the non-volatile according to a 27th embodiment of the invention; and

20 FIG. 57B is across-sectional view taken along line 57B-57B in FIG. 57A.

DETAILED DESCRIPTION OF THE INVENTION

FIGS. 1A to 1C show a semiconductor integrated circuit (IC) device according to a first embodiment of the present invention, in which FIG. 1A is a plan view, FIG. 1B is a cross-sectional view taken along line

1B-1B in FIG. 1A, and FIG. 1C is a cross-sectional view taken along line 1C-1C in FIG. 1A.

As is shown in FIGS. 1A to 1C, a processor 2, an SRAM 3, a DRAM 4 and a flash-EEPROM 5 are mounted, as functional circuits, on a semiconductor IC chip 1. These functional circuits are isolated from one another by an isolating region 10 provided on the chip 1. The isolating region 10 is put in contact with the entire side surfaces of the chip 1.

In the first embodiment of the present invention, the processor 2 is defined as including, in addition to a microprocessor, circuits basically constituted by logic circuits, for example, control circuits such as a CPU (Central Processing Unit) and a DSP (Digital Signal Processor), arithmetic circuits, etc.

Similarly, the SRAM 3 is defined as including, in addition to an SRAM, a memory circuit basically constituted by a logic circuit, such as a cross-couple type latch circuit.

The DRAM 4 is defined as including a synchronous control type DRAM, etc. in addition to an asynchronous control type DRAM.

The flash-EEPROM 5 is defined as including a NAND circuit, etc. in addition to a NOR circuit.

FIG. 2 is a plan view of a wafer on which semiconductor IC chips 1 according to the first embodiment are formed.

In the state in which the chips 1 are formed on the silicon wafer 11, as shown in FIG. 2, the isolating region 10 is put in contact with the entire side surfaces of each chip 1. Thus, the chips 1 are isolated from one another by the isolate regions 10.

FIGS. 3A to 3C are enlarged views of the wafer shown in FIG. 2. FIG. 3A is a plan view of a region shown by a dot-and-dash-line in FIG. 2. FIG. 3B is a cross-sectional view taken along line 3B-3B in FIG. 3A, and FIG. 3C is a cross-sectional view taken along line 3C-3C in FIG. 3A.

As is shown in FIGS. 3A to 3C, dicing lines 12 are provided among the chips 1. The wafer 11 are diced along the dicing lines 12. Thereby, each chip 1 is cut out of the wafer 11. In this case, the isolating region 10 is provided on the dicing lines 12 and thus the isolating region 10 is put in contact with the entire side surfaces of each chip 1.

FIG. 4 is a plan view of the semiconductor IC device according to the first embodiment, which is being tested.

As is shown in FIG. 4, a probe card 100 has measuring units 101A to 101D associated with four chips 1. Probes 102 extend from each of the measuring units 101A to 101D. Contacts 103 are provided for electric contact with a wafer prober (not shown). The probes 102 are put in electric contact with pads 104 of

each chip 1. The wafer prober supplies an operating voltage and a test pattern to the four chips 1 simultaneously via the probes 102. Thereby, the four chips 1 are tested at the same time and the characteristics thereof are measured to determine the pass or fail of each chip 1.

FIG. 5 shows a wafer probing test system.

In a regular test system, one test station is assigned to one test apparatus (single-station type test system). By contrast, in a system shown in FIG. 5, a plurality of stations, for example, two stations 200A and 200B, are assigned to one test apparatus 300. This system is called a multi-station type test system. As compared to the single-station type system, a test time per chip is shortened. The IC device according to the first embodiment of the invention is tested by using the single-station type test system or the multi-station type test system shown in FIG. 5.

In the device according to the first embodiment, the functional circuits of processor 2, SRAM 3, DRAM 4 and flash-EEPROM 5 are isolated from one another by means of the isolating region 10. Thus, each functional circuit can be tested without influence of the other functional circuits. Accordingly, the characteristics of the functional circuits with different functions, which are provided on the single chip, can be exactly measured.

The isolating region 10 is put in contact with the entire periphery of the chip 1. Thus, even if the chips 1 are simultaneously tested in the state shown in FIG. 4, each functional circuit of one chip 1 can be tested without influence of the functional circuits of the other chips 1. Accordingly, the characteristics of the functional circuits with different functions, which are provided on the single chip, can be exactly measured.

10 A semiconductor integrated circuit (IC) device according to a second embodiment of the present invention will now be described.

FIG. 6 is a cross-sectional view of the semiconductor IC device according to the second embodiment.

15 The cross-sectional view of FIG. 6 shows the state wherein chips 1 are formed in a silicon wafer.

In the device according to the second embodiment, as shown in FIG. 6, an isolating region 10 is formed of a P-type silicon substrate (P-SUB). The P-type silicon substrate 10 is, for example, a wafer itself. A plurality of large N-wells 22 are provided in the substrate 10. In the device of the second embodiment, large wells 22-2 to 22-5 are provided. A processor 2, an SRAM 3, a DRAM 4 and a flash-EEPROM 5 are formed in the four wells 22-2 to 22-5, respectively. Optimal power potentials for respective functional circuits are supplied to the large wells 22-2 to 22-5. In the

semiconductor IC device of the second embodiment, a high potential power VCC is supplied to the well 22-2, a high potential power VDD3 to the well 22-3, a high potential power VDD4 to the well 22-4, and a high potential power VDD5 to the well 22-5. The high potential power VCC, along with a low potential power VSS (not shown), is an external power provided from the outside of the chip 1. The high potential powers VDD3 to VDD5 are internal powers generated by voltage-converting the external power VCC within the chip 1. The voltage conversion includes operations of lowering and raising the level of the external power. The P-type silicon substrate 10 is grounded at the time of use and the time of tests.

The cross-sectional structure of each well will now be described, following which a power supply system of the device of the second embodiment will be described.

FIG. 7 is a cross-sectional view of the well 22-2 shown in FIG. 6.

As is shown in FIG. 7, a P-well 23-2 and an N-well 24-4 are provided in the large N-well 22-2. A low potential power VSS (ground potential) is supplied to the P-well 23-2. An N-channel MOSFET (hereinafter referred to as "NMOS") 1 is formed in the P-well 23-2. The N-well 24-2, like large N-well 22-2, is supplied with high potential power VCC. A P-channel MOSFET

(hereinafter referred to as "PMOS") 1 formed in the N-well 24-2. The N-well 24-2 has an impurity concentration higher than that of the large N-well 22-2. Thereby the PMOS 1 can be reduced in size. The N-well 24-2 may not be provided.

A P-well 25-2 is formed in the large N-well 22-2. The P-type well 25-2 is supplied with low potential power VSS (ground potential). An N-well 26-2 and a P-well 27-2 are formed in the P-well 25-2. The N-well 26-2 is supplied with a high potential power VDD2. The high potential power VDD 2 differs from the power VCC and is an internal power generated by voltage-converting the external power potential within the chip 1. A PMOS 2 is formed in the N-well 26-2. The P-well 27-2 is supplied with low potential power VSS. An NMOS 2 is formed in the P-well 27-2. The P-well 27-2 has an impurity concentration higher than that of the P-well 25-2. The P-well 27-2, like the N-well 24-2, may not be provided.

The processor 2 basically comprises the NMOS 1, NMOS 2, PMOS 1 and PMOS 2. However, the processor 2 may be constituted by the NMOS 2 and PMOS 2 alone which are driven by the internal power VDD2. In this case, the NMOS 1 and PMOS 1 which are driven by the external power VCC may preferably be used, for example, in a voltage generating circuit for generating the internal power VDD2 from the external power VCC. In addition,

a plurality of P-wells, which are similar to the P-well 25-2, may be formed in the large N-well 22-2.

In FIG. 7, reference character G denotes a gate of each MOSFET.

5 FIG. 8 is a cross-sectional view of the well 22-3 shown in FIG. 6.

As is shown in FIG. 8, a P-well 23-3 and an N-well 24-3 are formed in the large N-well 22-3. The P-well 23-3 is supplied with a low potential power VSS (ground potential). An NMOS 3 is formed in the P-well 23-3. The N-well 24-3, like the large N-well 22-3, is supplied with a high potential internal power VDD 3. A PMOS 3 is formed in the N-well 24-3. The N-well 24-3 has an impurity concentration higher than that of the large N-well 22-3. The N-well 24-3 may not be provided.

10
15

A P-well 25-3 is formed in the large N-well 22-3. The P-well 25-3 is supplied with a low potential power VSS (ground potential). An N-well 26-3 and a P-well 27-3 are formed in the P-well 25-3. The N-well 26-3 is supplied with a high potential internal power VDD3'. The internal power VDD3' is generated by voltage-converting the internal power VDD3 within the chip 1. A PMOS 4 is formed in the N-well 26-3. The P-well 27-3 is supplied with a low potential power VSS. An NMOS 4 is formed in the P-well 27-3. The P-well 27-3 has an impurity concentration higher than that of the P-well 25-3. The P-well 27-3, like the N-well 24-3, may not

20
25

be provided.

The SRAM 3 basically comprises the NMOS 3, NMOS 4, PMOS 3 and PMOS 4. However, the SRAM 3 may be constituted by the NMOS 4 and PMOS 4 alone which are driven by the internal power VDD3'. In this case, the NMOS 3 and PMOS 3 which are driven by the internal power VDD3 may preferably be used, for example, in a voltage generating circuit for generating the internal power VDD3' from the internal power VDD3. In addition, a plurality of P-wells, which are similar to the P-well 25-3, may be formed in the large N-well 22-3.

In FIG. 8, reference character G denotes a gate of each MOSFET.

FIGS. 9A and 9B are cross-sectional views of the well 22-4 shown in FIG. 6.

As is shown in FIGS. 9A and 9B, a P-well 23-4 and an N-well 24-4 are formed in the large N-well 22-4. The P-well 23-4 is supplied with a low potential power VSS (ground potential). An NMOS 5 is formed in the P-well 23-4. The N-well 24-4, like the large N-well 22-4, is supplied with high potential internal power VDD 4. A PMOS 5 is formed in the N-well 24-4. The N-well 24-4 has an impurity concentration higher than that of the large N-well 22-4. The N-well 24-4 may not be provided.

In addition, three P-wells 25A-4, 25B-4 and 25C-4 are formed in the large N-well 22-4.

The first P-well 25A-4 is supplied with a negative potential power VBB (about -2 to -3v). The negative potential power VBB is generated by voltage-converting the internal power VDD 4 within the chip 1. A dynamic memory cell transistor is formed in the P-well 25A-4.

The second P-well 25B-4 is supplied with a low potential power VSS (ground potential). An N-well 26B-4 and a P-well 27B-4 are formed in the P-well 25B-4. A high potential internal power VDD4' is supplied to the N-well 26B-4. The internal power VDD4' is generated by voltage-converting the internal power VDD4 within the chip 1. A PMOS 6 is formed in the N-well 26B-4. The P-well 27B-4 is supplied with a low potential power VSS. An NMOS 6 is formed in the P-well 27B-4. The P-well 27B-4 has an impurity concentration higher than that of the P-well 25B-4. The P-well 27B-4, like the N-well 24-4, may not be provided.

The third P-well 25C-4 is supplied with a negative potential power VBB (about -2 to -3v). An N-well 26C-4 and a P-well 27C-4 are formed in the P-well 25C-4. A high potential internal power VDD4" is supplied to the N-well 26C-4. The internal power VDD4" is generated by voltage-converting the internal power VDD4 within the chip 1. A PMOS 7 is formed in the N-well 26C-4. The P-well 27C-4 is supplied with a negative potential power VBB. An NMOS 7 is formed in the P-well 27C-4. The P-well 27C-4 has an impurity concentration higher

than that of the P-well 25C-4. The P-well 27C-4, like the N-well 24-4, may not be provided.

A memory cell array of the DRAM 4 comprises dynamic memory cell transistors, and peripheral circuits of the DRAM 4 are constituted by NMOS 5, NMOS 6, PMOS 5 and PMOS 6. The peripheral circuits of the DRAM 4 may be constituted by the NMOS 6 and PMOS 6 alone, which are driven by the internal power VDD4'. In this case, the NMOS 5 and PMOS 5, which are driven by the internal power VDD4, may preferably be used, for example, in a voltage generating circuit for generating the internal powers VDD4', VDD4" and VBB from the internal power VDD4.

The peripheral circuits of the DRAM 4 include a circuit using a boost potential VPP, for example, a word line driver. In order to constitute such a circuit, an N-well to be supplied with boost potential VPP may be formed in the P-well 25B-4. The NMOS 7 and PMOS 7, which are formed in the p-well 25C-4 supplied with the negative potential power VBB, may preferably be used, for example, in an input/output circuit for exchanging signals with the outside of the chip 1, or an internal interface circuit for exchanging signals with another functional circuit which is formed in the chip 1 and driven by a different power supply, such as processor 2 formed in another well. It is possible that a surge may be input to the input/output circuit

or internal interface circuit. In order to clamp such a surge, a negative potential VBB is supplied to the P-well 25C-4. The P-well supplied with such a negative potential may be provided not only in the N-well 22-4 but also in the N-wells 22-2, 22-3 and 22-5, respectively. It is preferable that the input/output circuit for exchanging signals with the outside of chip 1 or the internal interface circuit for exchanging signals with some other functional circuit be formed in the P-well supplied with the negative potential.

In FIGS. 9A and 9B, reference character G denotes a gate of the MOSFET, reference character BL a bit line, reference character WL a word line, character PL a plate electrode of a memory capacitor, and character SN a storage electrode of the memory capacitor.

FIGS. 10A and 10B are cross-sectional views of the well 22-5 shown in FIG. 6.

As is shown in FIGS. 10A and 10B, a P-well 23-5 and an N-well 24-5 are formed in the large N-well 22-5. The P-well 23-5 is supplied with a low potential power VSS (ground voltage). An NMOS 9 is formed in the P-well 23-5. The N-well 24-5, like the large N-well 22-5, is supplied with a high potential internal power VDD5. A PMOS 9 is formed in the N-well 24-5. The N-well 24-5 has an impurity concentration higher than that of the large N-well 22-5. The N-well 24-5 may not be provided.

Two P-wells 25A-5 and 25B-5 are formed in the large N-well 22-5.

5 The first P-well 25A-5 is supplied with a low potential power VSS (ground potential). An N-well 26A-5 and a P-well 27A-5 are formed in the P-well 25A-5. The N-well 26A-5 is supplied with a high potential internal power VDD5". The internal power VDD5" is generated by voltage-converting the internal power VDD5 within the chip 1. A PMOS 8 is formed in
10 the N-well 26A-5. The P-well 27A-5 is supplied with a low potential power VSS. An NMOS 8 is formed in the P-well 27A-5. The P-well 27A-5 has an impurity concentration higher than that of the P-well 25A-5. The P-well 27A-5, like the N-well 24-5, may not be
15 provided.

 In addition, an N-well 26A0-5 is formed in the first P-well 25A-5. The N-well 26A0-5 is selectively supplied with a high potential internal power VDD5' and a boost potential VEE. The internal power VDD5' and
20 boost potential VEE are generated by voltage-converting the internal power VDD5 within the chip 1. A P-well 28-5 is formed in the N-well 26A0-5. The P-well 28-5 is selectively supplied with a low potential power VSS, a boost potential VEE and a drop potential VBB. The
25 drop potential VBB is generated by voltage-converting the internal power VDD5 within the chip 1. NAND type memory cell transistors are formed in the P-well 28-5.

When data in the NAND type memory cell transistors is to be erased, the control gates CG are grounded and both the N-well 26A0-5 and P-well 28-5 are supplied with boost potential VEE. Thereby, electrons are drawn out from a floating gate FG into the P-well 28-5, and the data is erased. On the other hand, when data is to be written in the NAND type memory cell transistors, a program voltage is applied to control gates CG, potential VDD5' is supplied to the N-well 26A0-5, and drop voltage VBB is supplied to the P-well 28-5. Thereby, electrons are injected in floating gates FG from a channel under the floating gates FG. When data stored in the NAND type memory cell transistors is to be read out, a readout voltage is applied to the control gates CG, potential VDD5' is supplied to the N-well 26A0-5, and a low potential VSS is supplied to the P-well 28-5. Thereby, "0/1" data represented by the conduction/non-conduction of a channel current is determined on the basis of the charged state of the floating gate FG, and the data is read out to the bit line BL.

The second P-well 25B-5 is supplied with low potential power VSS (ground potential). An N-well 26B-5 and a P-well 27B-5 are formed in the P-well 25B-5. The N-well 26B-5 is supplied with a high potential internal power VDD 5'''. The internal power VDD5''' is generated by voltage-converting the internal power VDD5 within the chip 1. A PMOS 10 is formed in

the N-well 26B-5. The P-well 27B-5 is supplied with low potential power VSS. An NMOS 10 is formed in the P-well 27B-5. The P-well 27B-5 has an impurity concentration higher than that of the P-well 25B-5. The P-well 27B-5, like the N-well 24-5, may not be provided.

A memory cell array of the flash-EEPROM 5 comprises NAND type memory cell transistors, and peripheral circuits of the flash-EEPROM5 are constituted by NMOS 8, NMOS 9, NMOS 10, PMOS 8, PMOS 9 and PMOS 10. The peripheral circuits of the flash-EEPROM 5 may be constituted by the NMOS 8, NMOS 10, PMOS 8, and PMOS 10 alone, which are driven by the internal powers VDD" and VDD'''. In this case, the NMOS 9 and PMOS 9, which are driven by the internal power VDD5, may preferably be used, for example, in a voltage generating circuit for generating the internal powers VDD5', VDD5", VDD''', VBB and VEE from the internal power VDD5.

In FIGS. 10A and 10B, reference character G denotes a gate of each MOSFET.

FIG. 11 is a block diagram of a power supply system provided in the device according to the second embodiment of the invention.

As is shown in FIG. 11, the large N-well 22-2 is provided with a voltage generating circuit 30-2 which is driven by the external powers VCC and VSS to generate the internal powers VDD2, VDD3, VDD4 and VDD5 from

the external power VCC. The internal power VDD2 is a high potential power used in a part, or in the entire structure, of the processor 2. The internal power VDD3 is a high potential power to be supplied to the large N-well 22-3, the internal power VDD4 is a high potential power to be supplied to the large N-well 22-4, and the internal power VDD5 is a high potential power to be supplied to the large N-well 22-5. The large N-well 22-2 is provided with a control circuit 31-2, driven by external powers VCC and VSS, for controlling generation of internal powers VDD3, VDD4 and VDD5 by means of control signals TV3, TV4 and TV5. In addition, the voltage generating circuit 30-2 is connected to internal power monitor terminals VDD3M to VDD5M. The level of a voltage actually generated by the voltage generating circuit 30-2 can be monitored via the monitor terminals.

The large N-well 22-3 is provided with a voltage generating circuit 30-3 driven by an internal power VDD3 and an external power VSS to generate internal powers VDD3' and VDD3" from the internal power VDD3. The internal powers VDD3' and VDD3" are high potential powers, respectively, for use in a part or the entire body of the SRAM 3 (in FIG. 8, the internal power VDD3" shown in FIG. 11 is omitted). In addition, the large N-well 22-3 is provided with a control circuit 31-3, driven by the internal power VDD3 and external power

VSS, for controlling generation of the internal powers VDD3' and VDD3" by means of a control signal T03.

The voltage generating circuit 30-3 is connected to internal power monitor terminals VDD3'M and VDD3"M.

5 The level of a voltage actually generated by the voltage generating circuit 30-3 can be monitored via the monitor terminals.

The large N-well 22-4 is provided with a voltage generating circuit 30-4, driven by an internal power VDD4 and an external power VSS, for generating internal powers VDD4', VDD4" and VBB from the internal power VDD4. The internal powers VDD4' and VDD4" are high potential powers, respectively, for use in a part or the entire body of the DRAM 4. The internal power VBB is a negative potential power for use in the DRAM 4. In addition, the large N-well 22-4 is provided with a control circuit 31-4 driven by an internal power VDD4 and an external power VSS to control generation of the internal powers VDD4', VDD4" and VBB by means of a control signal T04. The voltage generating circuit 30-4 is connected to internal power monitor terminals VDD4'M and VDD4"M. The level of a voltage actually generated by the voltage generating circuit 30-4 can be monitored via the monitor terminals.

25 The large N-well 22-5 is provided with a voltage generating circuit 30-5 driven by an internal power VDD5 and an external power VSS to generate internal

powers VDD5', VDD5", VBB and VEE from the internal power VDD5. The internal powers VDD5' and VDD5" are high potential powers, respectively, for use in a part or the entire body of the flash-EEPROM 5 (in FIG. 11, the internal power VDD5''' shown in FIG. 11 is omitted). The internal power VBB is a negative potential power for use in the flash-EEPROM 5, and the internal power VEE is a boost potential power for use in the flash-EEPROM 5. The large N-well 22-5 is also provided with a control circuit 31-5 driven by an internal power VDD5 and an external power VSS to control generation of the internal powers VDD5', VDD5", VBB and VEE by means of a control signal TO5. The voltage generating circuit 30-5 is connected to internal power monitor terminals VDD5'M, VDD5"M, VBBM and VEEM. The level of a voltage actually generated by the voltage generating circuit 30-5 can be monitored via the monitor terminals.

It should suffice if the control signal input terminals and monitor terminals are provided, at least, at the time of tests. Thus, the control signal input terminals and monitor terminals may be provided, for example, on a dicing line, and not on the chip 1.

FIGS. 12A to 12C are timing charts illustrating the generation timing of the external and internal powers. FIG. 12A shows a generation timing at the time of use, and FIGS. 12B and 12C show generation timings

at the time of tests.

In the power supply system shown in FIG. 11, at the time of actual use, external power VCC is received at time t_0 , as is shown in FIG. 12A, and then internal powers VDD3 to VDD5, which are to be supplied to the wells 22-3 to 22-5, are simultaneously generated at time t_1 . Thereby, all the wells 22-2 to 22-5 are supplied with potentials and all the functions possessed by the chip 1 can be performed.

By contrast, as shown in FIGS. 12B and 12C, at the time of tests, external power VCC is received at time t_0 and then internal powers VDD3 to VDD5, which are to be supplied to the wells 22-3 and 22-5, are generated at given times (t_{01} to t_{08}) by the input of control signals TV3 to TV5. Thereby, the wells 22-3 to 22-5 are supplied with desired potentials, and only a selected one of functional circuits included in the chip 1 can be operated. For example, the internal power VDD4 is generated, while the generation of internal powers VDD3 and VDD5 is stopped. As a result, the DRAM 4 is supplied with power and rendered operable, whereas the SRAM 3 and flash-EEPROM 5 are not supplied with power and thus not rendered operable.

The control signals T03 to T05, like control signals TV3 to TV5, control the generation timing of the internal powers. According to this technique, only a selected one of circuit blocks constituting the

functional circuits can be operated. For example,
only the internal power VDD3' is generated, while the
generation of the internal power VDD3" is stopped.
Thereby, only the circuit block in the SRAM 3, which
5 uses the internal power VDD3', is supplied with power
and rendered operable. On the other hand, the circuit
block which uses the internal power VDD3" is not
supplied with power and thus not rendered operable.

In the device according to the second embodiment,
10 such functional circuits as processor 2, SRAM 3, DRAM 4
and flash-EEPROM 5 are formed in the N-wells 22-2 to
22-5, and the functional circuits are insulated from
one another by means of PN junctions between the N-
wells 22-2 to 22-5 and the P-type silicon substrate 10.
15 Thus, each functional circuit can be tested without
influence of the other functional circuits. Thereby,
the characteristics of the functional circuits with
different functions, which are mounted on single
chip 1, can be exactly measured.

20 Since the P-type silicon substrate 10 is a wafer
itself, the functional circuits are isolated among the
chips, too. Accordingly, a plurality of chips 1 can
be tested at a time such that each functional circuit
included in chip 1 is not influenced by functional
25 circuits included in other chips. Thereby, the charac-
teristics of the functional circuits with different
functions, which are mounted on each of chips 1, can be

exactly measured at a time with respect to all the chips 1.

5 Since the wells 22-2 to 22-5 are supplied with different potentials, it is possible to supply the functional circuits with such potentials as to bring out the characteristics of each functional circuit as much as possible.

10 In the power system possessed by the device of the second embodiment, the generation of internal power can be voluntarily stopped during tests. Specifically, only a selected one of the functional circuits can be operated, or only a selected one of circuit blocks constituting the functional circuits can be operated. In particular, in a testing step, only a functional
15 circuit to be tested can be operated while the other functional circuits are not operated. If the test is carried out in this way, the characteristics can be exactly measured since the functional circuit to be tested is not influenced by the other functional circuits. For example, as regards a circuit with a large
20 memory capacity such as a DRAM 4 or a flash-EEPROM 5, a testing step for identifying a defective row or a defective column needs to be performed. In this case, if the power of the other functional circuits is turned
25 off, the defective row or column can be identified with higher precision.

When the operation of the processor 2 which is

accessing the DRAM 4 is tested, power is supplied to the processor 2 or DRAM 4 alone, while no power is supplied to the other functional circuits, i.e. SRAM 3 and flash-EEPROM 5. In this case, the processor 2 and DRAM 4 are not influenced by the other functional circuits and thus the precision in tests can be improved. Similarly, when the operation of the processor 2 which is accessing the SRAM 3 is tested or when the operation of the processor 2 which is accessing the flash-EEPROM 5 is tested, no power is supplied to the other functional circuits. Thus, the precision in tests can be enhanced.

Suppose that while a number of chips 1 are measured simultaneously, there is a defective chip 1 and a large current flows to the substrate 10. In this case, the other chips 1 may be influenced, and exact measurement may not be carried out. To solve this problem, the above-described power system is used and the power to the functional circuits included in the defective chip 1 is turned off. Thereby, the defective chip 1 is prevented from adversely affecting the other chips 1.

A semiconductor integrated circuit (IC) device according to a third embodiment of the invention will now be described.

FIG. 13 is a cross-sectional view of the semiconductor IC device according to the third embodiment.

In the device according to the third embodiment, as is shown in FIG. 13, a processor 2 and an SRAM 3 are formed in a large well 22-2. The well 22-2 is supplied with a high potential power VCC.

5 FIGS. 14A and 14B are cross-sectional views of the well 22-2 shown in FIG. 13.

As is shown in FIGS. 14A and 14B, a P-well 23-2 and an N-well 24-2 are formed in the large N-well 22-2. The P-well 23-2 is supplied with low potential power
10 VSS (ground potential). An N-channel MOSFET (hereinafter referred to as "NMOS") 1 is formed in the P-well 23-2. The N-well 24-2, like the large N-well 22-2, is supplied with high potential power VCC. A P-channel MOSFET (hereinafter referred to as "PMOS") 1 is formed
15 in the N-well 24-2. The N-well 24-2 has an impurity concentration higher than that of the large N-well 22-2. The N-well 24-2 may not be formed.

A first P-well 25A-2 and a second P-well 25B-2 are formed in the large N-well 22-2. The P-wells 25A-2 and
20 25B-2 are supplied with low potential power VSS (ground potential).

An N-well 26A-2 and a P-well 27A-2 are formed in the first P-well 25A-2. The N-well 26A-2 is supplied with high potential power VDD2. The power VDD2 differs
25 from the power VCC and is an internal power generated by voltage-converting an external power potential within the chip 1. A PMOS 2 is formed in the N-well

26A-2. The P-well 27A-2 is supplied with low potential power VSS. An NMOS 2 is formed in the P-well 27A-2. The P-well 27A-2 has an impurity concentration higher than that of the P-well 25A-2. The P-well 27A-2, like the N-well 24-2, may not be provided.

An N-well 26B-2 and a P-well 27B-2 are formed in the second P-well 25B-2. The N-well 26B-2 is supplied with high potential power VDD3. The power VDD3 differs from power VCC and is an internal power generated by voltage-converting the external potential power within the chip 1. A PMOS 3 is formed in the N-well 26B-2. The P-well 27B-2 is supplied with low potential power VSS. An NMOS 3 is formed in the P-well 27B-2. The P-well 27B-2 has an impurity concentration higher than that of the P-well 25B-2. The P-well 27B-2, like the N-well 24-2, may not be provided.

The processor 2 basically comprises the NMOS 1, NMOS 2, PMOS 1 and PMOS 2. The processor 2, however, may be constituted by the NMOS 2 and PMOS 2 alone which are driven by the internal power VDD2. In this case, the NMOS 1 and PMOS 1, which are driven by the external power VCC, should preferably be used, for example, in a voltage generating circuit for generating internal power VDD2 from external power VCC.

The SRAM 3 basically comprises the NMOS 1, NMOS 3, PMOS 1 and PMOS 3. The SRAM 3, however, may be

constituted by the NMOS 3 and PMOS 3 alone which are driven by the internal power VDD3.

The processor 2 and SRAM 3 may be formed in one N-well 22-2 in this manner.

5 In FIGS. 14A and 14B, reference character G denotes the gate of each MOSFET.

A semiconductor integrated circuit (IC) device according to a fourth embodiment of the invention will now be described.

10 FIG. 15 is a cross-sectional view of the semiconductor IC device according to the fourth embodiment.

In the device according to the fourth embodiment, as is shown in FIG. 15, an SRAM 3 and a DRAM 4 are formed in a large well 22-4. The well 22-4 is supplied with an internal power VDD4.

15 FIGS. 16A and 16B are cross-sectional views of the well 22-4 shown in FIG. 15.

As is shown in FIGS. 16A and 16B, a P-well 23-4 and an N-well 24-4 are formed in the large N-well 22-4. The P-well 23-4 is supplied with low potential power VSS (ground potential). An NMOSFET 5 is formed in the P-well 23-4. The N-well 24-4, like the large N-well 22-4, is supplied with high potential internal power VDD4. A PMOSFET 5 is formed in the N-well 24-4. The N-well 24-4 has an impurity concentration higher than that of the large N-well 22-4. The N-well 24-4 may not be formed.

A first P-well 25A-4, a second P-well 25B-4 and a third P-well 25C-4 are formed in the large N-well 22-4.

5 The first P-well 25A-4 is supplied with negative potential power VBB (about -2 to -3V). The negative potential power VBB is generated by voltage-converting the internal power VDD4 within the chip 1. A dynamic memory cell transistor is formed in the P-well 25A-4.

10 The second P-well 25B4 is supplied with low potential power VSS (ground potential). An N-well 26B-4 and a P-well 27B-4 are formed in the P-well 25B-4. The N-well 26B-4 is supplied with high potential internal power VDD4'. The internal power VDD4' is generated by voltage-converting the internal power VDD4
15 within the chip 1. A PMOS 6 is formed in the N-well 26B-4. The P-well 27B-4 is supplied with low potential power VSS. An NMOS 6 is formed in the P-well 27B-4. The P-well 27B-4 has an impurity concentration higher than that of the P-well 25B-4. The P-well 27B-4, like
20 the N-well 24-4, may not be provided.

 The third P-well 25C-4 is supplied with low potential power VSS (ground potential). An N-well 26C-4 and a P-well 27C-4 are formed in the P-well 25C-4. The N-well 26C-4 is supplied with high potential internal power VDD3. The internal power VDD3 is
25 generated by voltage-converting internal power VDD4 within the chip 1. A PMOS 3 is formed in the N-well

26C-4. The P-well 27C-4 is supplied with low potential power VSS. An NMOS 3 is formed in the P-well 27C-4. The P-well 27C-4 has an impurity concentration higher than that of the P-well 25C-4. The P-well 27C-4, like
5 the N-well 24-4, may not be provided.

A memory cell array of the DRAM 4 comprises dynamic memory cell transistors, and peripheral circuits of the DRAM 4 are constituted by NMOS 5, NMOS 6, PMOS 5 and PMOS 6. The peripheral circuits of the DRAM
10 4 may be constituted by the NMOS 6 and PMOS 6 alone, which are driven by the internal power VDD4'. In this case, the NMOS 5 and PMOS 5, which are driven by the internal power VDD4, may preferably be used, for
15 example, in a voltage generating circuit for generating the internal powers VDD4 and VDD3 from the internal power VDD4.

The SRAM 3 basically comprises the NMOS 3, NMOS 5, PMOS 3 and PMOS 5. The SRAM 3, however, may be constituted by the NMOS 3 and PMOS 3 alone which are driven
20 by the internal power VDD3.

The processor 2 and SRAM 3 may be formed in one N-well 22-4 in this manner.

In FIGS. 16A and 16B, reference character G denotes the gate of each MOSFET, character BL a bit line, character WL a word line, character PL a plate
25 electrode of a memory capacitor, and character SN a storage electrode of the memory capacitor.

A semiconductor integrated circuit (IC) device according to a fifth embodiment of the invention will now be described.

5 FIG. 17 is a cross-sectional view of the semiconductor IC device according to the fifth embodiment.

In the device according to the fifth embodiment, as is shown in FIG. 17, a DRAM 4 is formed dividedly in two large wells 22A-4 and 22B-4. The well 22A-4 is supplied with internal power VDD4A, and the well 22B-4 is supplied with internal power VDD4B.

FIGS. 18A and 18B are cross-sectional views of the wells 22A-4 and 22B-4 shown in FIG. 17.

As is shown in FIGS. 18A and 18B, a P-well 23A-4 and an N-well 24A-4 are formed in the large N-well 22A-4. The P-well 23A-4 is supplied with low potential power VSS (ground potential). An NMOS 5A is formed in the P-well 23A-4. The N-well 24A-4, like the large N-well 22A-4, is supplied with high potential internal power VDD4A. A PMOS 5A is formed in the N-well 24A-4. The N-well 24A-4 has an impurity concentration higher than that of the large N-well 22A-4. The N-well 24A-4 may not be provided.

In addition, two P-wells 25AA-4 and 25AB-4 are formed in the large N-well 22A-4.

25 The first P-well 25AA-4 is supplied with negative potential power VBB (about -2 to -3V). The negative potential power VBB is generated by voltage-converting

internal power VDD4A within the chip 1. A dynamic memory cell transistor is formed in the P-well 25AA-4.

5 The second P-well 25AB-4 is supplied with low potential power VSS (ground potential). An N-well 26AB-4 and a P-well 27AB-4 are formed in the P-well 25AB-4. The N-well 26AB-4 is supplied with high potential internal power VDD4A'. The internal power VDD4A' is generated by voltage-converting internal power VDD4A within the chip 1. A PMOS 6A is formed in
10 the N-well 26AB-4. The P-well 27AB-4 is supplied with low potential power VSS. An NMOS 6A is formed in the P-well 27AB-4. The P-well 27AB-4 has an impurity concentration higher than that of the P-well 25AB-4. The P-well 27AB-4, like the N-well 24A-4, may not be
15 provided.

A P-well 23B-4 and an N-well 24B-4 are formed in the large N-well 22B-4. The P-well 23B-4 is supplied with low potential power VSS (ground potential). An NMOS 5B is formed in the P-well 23B-4. The N-well
20 24B-4, like the large N-well 22B-4, is supplied with high potential internal power VDD4B. A PMOS 5B is formed in the N-well 24B-4. The N-well 24B-4 has an impurity concentration higher than that of the large N-well 22B-4. The N-well 24B-4 may not be provided.

25 A P-well 25BA-4 is formed in the large N-well 22B-4. The P-well 25BA-4 is supplied with low potential power VSS (ground potential). An N-well

26BA-4 and a P-well 27BA-4 are formed in the P-well 25BA-4. The N-well 26BA-4 is supplied with high potential internal power VDD4B'. The internal power VDD4B' is generated by voltage-converting internal power VDD4B within the chip 1. A PMOS 6B is formed in the N-well 26BA-4. The P-well 27BA-4 is supplied with low potential power VSS. An NMOS 6B is formed in the P-well 27BA-4. The P-well 27BA-4 has an impurity concentration higher than that of the P-well 25BA-4. The P-well 27BA-4, like the N-well 24B-4, may not be provided.

A memory cell array of the DRAM 4 comprises dynamic memory cell transistors, and peripheral circuits of the DRAM 4 are constituted by NMOS 5A, NMOS 6A, NMOS 5B, NMOS 6B, PMOS 5A, PMOS 6A, PMOS 5B and PMOS 6B. The peripheral circuits of the DRAM 4 may be constituted by the NMOS 6A, NMOS 6B, PMOS 6A and PMOS 6B alone, which are driven by the internal powers VDD4A' and VDD4B'. In this case, the NMOS 5A and PMOS 5A, which are driven by the internal power VDD4, may preferably be used, for example, in a voltage generating circuit for generating the internal power VDD4A' from the internal power VDD4A. In addition, the NMOS 5B and PMOS 5B, which are driven by the internal power VDD4B, may preferably be used, for example, in a voltage generating circuit for generating the internal power VDD4B' from the internal power VDD4B.

The DRAM 3 may be formed dividedly in the two N-wells 22A-4 and 22B-4.

In FIGS. 18A and 18B, reference character G denotes the gate of each MOSFET, character BL a bit line, character WL a word line, character PL a plate electrode of a memory capacitor, and character SN a storage electrode of the memory capacitor.

A semiconductor integrated circuit (IC) device according to a sixth embodiment of the invention will now be described.

FIG. 19 is a cross-sectional view of the semiconductor IC device according to the sixth embodiment.

In the device according to the sixth embodiment, as is shown in FIG. 19, a flash-EEPROM 5 is formed dividedly in two large wells 22A-5 and 22B-5. The well 22A-5 is supplied with internal power VDD5A, and the well 22B-5 is supplied with internal power VDD5B.

FIGS. 20A and 20B are cross-sectional views of the wells 22A-5 and 22B-5 shown in FIG. 17.

As is shown in FIGS. 20A and 20B, a P-well 23A-5 and an N-well 24A-5 are formed in the large N-well 22A-5. The P-well 23A-5 is supplied with low potential power VSS (ground potential). An NMOS 9A is formed in the P-well 23A-5. The N-well 24A-5, like the large N-well 22A-5, is supplied with high potential internal power VDD5A. A PMOS 9A is formed in the N-well 24A-5. The N-well 24A-5 has an impurity concentration higher

than that of the large N-well 22A-5. The N-well 24A-5 may not be provided.

5 A P-well 25AA-5 is formed in the large N-well 22A-4. The P-well 25AA-5 is supplied with low potential power VSS (ground potential). An N-well 26AA-5 and a P-well 27AA-5 are formed in the P-well 25AA-5. The N-well 26AA-5 is supplied with high potential internal power VDD5A'. The internal power VDD5A' is generated by voltage-converting the internal power
10 VDD5A within the chip 1. A PMOS 8A is formed in the N-well 26AA-5. The P-well 27AA-5 is supplied with low potential power VSS. An NMOS 8A is formed in the P-well 27AA-5. The P-well 27AA-5 has an impurity concentration higher than that of the P-well 25AA-5.
15 The P-well 27AA-5, like the N-well 24A-5, may not be provided.

An N-well 26AO-5 is formed in the P-well 25AA-5. The N-well 26AO-5 is selectively supplied with high potential internal power VDD5A' and boost potential
20 VEE. The internal power VDD5A' and boost potential VEE are generated by voltage-converting internal power VDD5A within the chip 1. A P-well 28-5 is formed in the N-well 26AO-5. The P-well 28-5 is selectively supplied with low potential internal power VSS, boost
25 potential VEE and drop potential VBB. The drop potential is generated by voltage-converting internal power VDD5A within the chip 1. A NAND type memory cell

transistor is formed in the P-well 28-5.

5 A P-well 23B-5 and an N-well 24B-5 are formed in the large N-well 22B-5. The P-well 23B-5 is supplied with low potential power VSS (ground potential). An NMOS 9B is formed in the P-well 23B-5. The N-well 24B-5, like the large N-well 22B-5, is supplied with high potential internal power VDD5B. A PMOS 9B is formed in the N-well 24B-5. The N-well 24B-5 has an impurity concentration higher than that of the large N-well 22B-5. The N-well 24B-5 may not be provided.

10 A P-well 25BA-5 is formed in the large N-well 22B-4. The P-well 25BA-5 is supplied with low potential power VSS (ground potential). An N-well 26BA-5 and a P-well 27BA-5 are formed in the P-well 25BA-5. 15 The N-well 26BA-5 is supplied with high potential internal power VDD5B'. The internal power VDD5B' is generated by voltage-converting internal power VDD5B within the chip 1. A PMOS 10B is formed in the N-well 26BA-5. The P-well 27BA-5 is supplied with low 20 potential power VSS. An NMOS 10B is formed in the P-well 27BA-5. The P-well 27BA-5 has an impurity concentration higher than that of the P-well 25BA-5. The P-well 27BA-5, like the N-well 24B-5, may not be provided.

25 A memory cell array of the flash-EEPROM 5 comprises NAND type memory cell transistors, and peripheral circuits of the flash-EEPROM 5 are

constituted by NMOS 8A, NMOS 9A, NMOS 9B, NMOS 10B,
PMOS 8A, PMOS 9A, PMOS 9B and PMOS 10B. The peripheral
circuits of the flash-EEPROM 5 may be constituted by
the NMOS 8A, NMOS 10B, PMOS 8A and PMOS 10B alone,
5 which are driven by the internal powers VDD5A" and
VDD5B'. In this case, the NMOS 9A and PMOS 9A, which
are driven by the internal power VDD5A, may preferably
be used, for example, in a voltage generating circuit
for generating the internal powers VDD5A', VDD5A", VBB
10 and VEE from the internal power VDD5A. In addition,
the NMOS 9B and PMOS 9B, which are driven by the inter-
nal power VDD5B, may preferably be used, for example,
in a voltage generating circuit for generating the
internal power VDD5B' from the internal power VDD5B.

15 The flash-EEPROM 5 may be formed dividedly in the
two N-wells 22A-5 and 22B-5, as has been described
above.

In FIGS. 20A and 20B, reference character G
denotes the gate of each MOSFET, character BL a bit
20 line, character CG a control gate, and character FG a
floating gate.

FIGS. 21A to 21C show a semiconductor integrated
circuit (IC) device according to a seventh embodiment
of the present invention. FIG. 21A is a plan view,
25 FIG. 21B is a cross-sectional view taken along line
21B-21B in FIG. 21A, and FIG. 21C is a cross-sectional
view taken along line 21C-21C in FIG. 21A.

As is shown in FIGS. 21A to 21C, a processor 2, an SRAM 3, a DRAM 4, a flash-EEPROM 5, a D/A converter 6, and an analog circuit 7 are formed, as functional circuits, in a semiconductor IC chip 1. These functional
5 circuits are isolated from one another by means of an isolating region 10 provided on the chip 1. In addition, the isolating region 10 is put in contact with the entire periphery of the chip 1.

A semiconductor integrated circuit (IC) device
10 according to an eighth embodiment of the invention will now be described.

FIGS. 22A and 22B are cross-sectional views of the semiconductor IC device according to the eighth embodiment.

15 In the cross-sections shown in FIGS. 22A and 22B, the chip 1 is formed in a silicon wafer.

In the device according to the eighth embodiment, as shown in FIGS. 22A and 22B, the isolating region 10 is formed of a P-silicon substrate (P-SUB). For exam-
20 ple, the P-silicon substrate 10 is the silicon wafer itself. A plurality of N-wells (N-WELL) 22 are provided in the substrate 10. In the device according to the eighth embodiment, there are provided six large wells 22-2 to 22-7. A processor 2, an SRAM 3, a
25 DRAM 4, a flash-EEPROM 5, a D/A converter 6, and an analog circuit 7 are formed in the six large wells 22-2 to 22-7. The large wells 22-2 to 22-7 are supplied

with optimal power potentials for the respective functional circuits. In the semiconductor IC device according to the eighth embodiment, the well 22-2 is supplied with high potential power VCC, the well 22-3 with high potential power VDD3, the well 22-4 with high potential power VDD4, the well 22-5 with high potential power VDD5, the well 22-6 with high potential power VDD6, and the well 22-7 with high potential power VDD7. The high potential power VCC is an external power which is, like low potential power VSS (not shown), supplied from the outside of the chip 1. The high potential powers VDD3 to VDD7 are internal powers generated by voltage-converting the external potential within the chip 1.

FIG. 23 is a cross-sectional view of the well 22-6 shown in FIGS. 22A and 22B.

As is shown in FIG. 23, a P-well 23-6 and an N-well 24-6 are formed in the large N-well 22-6. The P-well 23-6 is supplied with low potential power VSS (ground potential). An NMOS 11 is formed in the P-well 23-6. The N-well 24-6, like the large N-well 22-6, is supplied with high potential power VDD6. A PMOS 11 is formed in the N-well 24-6. The N-well 24-6 has an impurity concentration higher than that of the large N-well 22-6. The N-well 24-6 may not be provided.

A P-well 25-6 is formed in the large N-well 22-6. The P-well 25-6 is supplied with low potential power

VSS (ground potential). An N-well 26-6 and a P-well 27-6 are formed in the P-well 25-6. The N-well 26-6 is supplied with high potential power VDD6'. The power VDD' is an internal power generated by voltage-converting the power VDD6 within the chip 1. A PMOS 12 is formed in the N-well 26-6. The P-well 27-6 is supplied with low potential power VSS. An NMOS 12 is formed in the P-well 27-6. The P-well 27-6 has an impurity concentration higher than that of the P-well 25-6. The P-well 27-6, like the N-well 24-6, may not be provided.

The D/A converter 6 basically comprises the NMOS 11, NMOS 12, PMOS 11 and PMOS 12. The D/A converter 6 may be constituted by the NMOS 12 and PMOS 12 alone which are driven by the internal power VDD6'. In this case, the NMOS 11 and PMOS 11, which are driven by the internal power VDD6, may preferably be used, for example, in a voltage generating circuit for generating the internal power VDD6' from the internal power VDD6. In addition, a plurality of P-wells similar to the P-well 25-6 may be formed in the large N-well 22-6.

In FIG. 23, reference character G denotes a gate of each MOSFET.

FIG. 24 is a cross-sectional view of the well 22-7 shown in FIGS. 22A and 22B.

As is shown in FIG. 24, a P-well 23-7 and an N-well 24-7 are formed in the large N-well 22-7. The

P-well 23-7 is supplied with low potential power VSS (ground potential). An NMOS 13 is formed in the P-well 23-7. The N-well 24-7, like the large N-well 22-7, is supplied with high potential internal power VDD7. A PMOS 13 is formed in the N-well 24-7. The N-well 24-7 has an impurity concentration higher than that of the large N-well 22-7. The N-well 24-7 may not be provided.

A P-well 25-7 is formed in the large N-well 22-7. The P-well 25-7 is supplied with low potential power VSS (ground potential). An N-well 26-7 and a P-well 27-7 are formed in the P-well 25-7. The N-well 26-7 is supplied with high potential power VDD7'. The power VDD7' is an internal power generated by voltage-converting the power VDD7 within the chip 1. A PMOS 14 is formed in the N-well 26-7. The P-well 27-7 is supplied with low potential power VSS. An NMOS 14 is formed in the P-well 27-7. The P-well 27-7 has an impurity concentration higher than that of the P-well 25-7. The P-well 27-7, like the N-well 24-7, may not be provided.

The analog circuit 7 basically comprises the NMOS 13, NMOS 14, PMOS 13 and PMOS 14. The analog circuit 7 may be constituted by the NMOS 14 and PMOS 14 alone which are driven by the internal power VDD7'. In this case, the NMOS 13 and PMOS 13, which are driven by the internal power VDD7, may preferably be used, for

example, in a voltage generating circuit for generating the internal power VDD7' from the internal power VDD7. In addition, a plurality of P-wells similar to the P-well 25-7 may be formed in the large N-well 22-7.

5 In FIG. 24, reference character G denotes a gate of each MOSFET.

FIGS. 25A to 25C show a semiconductor integrated circuit (IC) device according to a ninth embodiment of the present invention. FIG. 25A is a plan view, FIG. 10 25B is a cross-sectional view taken along line 25B-25B in FIG. 25A, and FIG. 25C is a cross-sectional view taken along line 25C-25C in FIG. 25A.

As is shown in FIGS. 25A to 25C, an SRAM 3, a DRAM 4, a flash-EEPROM 5, and a logic circuit 8 are 15 formed, as functional circuits, in a semiconductor IC chip 1. These functional circuits are isolated from one another by means of an isolating region 10 provided on the chip 1. In addition, the isolating region 10 is put in contact with the entire periphery of the chip 1.

20 The logic circuit 8 is, like processor 2, constituted by a logic circuit component, but the scale of circuitry of the logic circuit 8 is less than that of the processor 2.

A semiconductor integrated circuit (IC) device 25 according to a tenth embodiment of the invention will now be described.

FIG. 26 is a cross-sectional view of the

semiconductor IC circuit according to the tenth embodiment of the invention.

In the cross-sections shown in FIG. 26, the chip 1 is formed in a silicon wafer.

5 In the device according to the tenth embodiment, as shown in FIG. 26, the isolating region 10 is formed of a P-silicon substrate (P-SUB). For example, the P-silicon substrate 10 is the silicon wafer itself. A plurality of N-wells (N-WELL) 22 are provided in the
10 substrate 10. In the device according to the tenth embodiment, there are provided four large wells 22-3 to 22-5 and 22-8. An SRAM 3, a DRAM 4, a flash-EEPROM 5, and a logic circuit 8 are formed in the four large wells 22-3 to 22-5 and 22-8. The large wells 22-3 to
15 22-5 and 22-8 are supplied with optimal power potentials for the respective functional circuits. In the semiconductor IC device according to the tenth embodiment, the well 22-3 is supplied with high potential power VCC, the well 22-4 with high potential
20 power VDD4, the well 22-5 with high potential power VDD5, and the well 22-8 with high potential power VDD8. The high potential power VCC is an external power which is, like low potential power VSS (not shown), supplied from the outside of the chip 1. The high potential
25 powers VDD4, VDD5 and VDD8 are internal powers generated by voltage-converting the external power potential within the chip 1.

FIG. 27 is a cross-sectional view of the well 22-8 shown in FIG. 26.

As is shown in FIG. 27, a P-well 23-8 and an N-well 24-8 are formed in the large N-well 22-8. The P-well 23-8 is supplied with low potential power VSS (ground potential). An NMOS 15 is formed in the P-well 23-8. The N-well 24-8, like the large N-well 22-8, is supplied with high potential power VDD8. A PMOS 15 is formed in the N-well 24-8. The N-well 24-8 has an impurity concentration higher than that of the large N-well 22-8. The N-well 24-6 may not be provided.

A P-well 25-8 is formed in the large N-well 22-8. The P-well 25-8 is supplied with low potential power VSS (ground potential). An N-well 26-8 and a P-well 27-8 are formed in the P-well 25-8. The N-well 26-8 is supplied with high potential power VDD8'. The power VDD8' is an internal power generated by voltage-converting the power VDD8 within the chip 1. A PMOS 16 is formed in the N-well 26-8. The P-well 27-8 is supplied with low potential power VSS. An NMOS 16 is formed in the P-well 27-8. The P-well 27-8 has an impurity concentration higher than that of the P-well 25-8. The P-well 27-8, like the N-well 24-8, may not be provided.

The logic circuit 8 basically comprises the NMOS 15, NMOS 16, PMOS 15 and PMOS 16. The logic circuit 8 may be constituted by the NMOS 16 and PMOS 16 alone

which are driven by the internal power VDD8'. In this case, the NMOS 15 and PMOS 15, which are driven by the internal power VDD8, may preferably be used, for example, in a voltage generating circuit for generating the internal power VDD8' from the internal power VDD8. In addition, a plurality of P-wells similar to the P-well 25-6 may be formed in the large N-well 22-8.

In FIG. 23, reference character G denotes a gate of each MOSFET.

A semiconductor integrated circuit (IC) device according to an eleventh embodiment of the present invention.

FIG. 28 is a plan view showing the state in which the semiconductor IC device according to the eleventh embodiment is being tested.

As is shown in FIG. 28, pads 104 may be arranged in a staggering manner in three rows.

The embodiments of the present invention have been described above. The present invention, however, may be modified variously. For example, the processor 2, SRAM 3, DRAM 4, flash-EEPROM 5, D/A converter 6, analog circuit 7 and logic circuit 8 are mentioned above as functional circuits. However, other functional circuits may be used, and the functional circuits to be formed in one semiconductor chip may be variously combined.

It is described above that the external potential

power VCC is applied to the well in which the processor
2 or SRAM 3 is formed. However, the external potential
power VCC may be applied to the wells in which other
functional circuits are formed. In addition, it is
5 possible to form a well which is to be supplied with
external potential power VCC and to provide this well
with a circuit for generating a potential to be supplied
to other wells.

A twelfth embodiment of the invention will now be
10 described.

FIG. 29 is a plan view showing a basic structure
of a semiconductor integrated circuit (IC) device chip
according to the first to eleventh embodiments.

In the semiconductor IC device of the invention,
15 as shown in FIG. 29, for example, the processor 2,
SRAM 3, DRAM 4 and flash-EEPROM 5 are formed as
functional circuits in the mutually isolated wells 22-2
to 22-5. Thus, even if a plurality of chips formed on
a wafer is tested at a time, the functional circuits
20 included in each chip are hardly influenced by one
another. As has been described with reference to
FIG. 5, each functional circuit can be tested with high
precision. Since tests can be performed with high
precision, the yield of products being subjected to
25 tests in the state in which the products are formed on
the wafer can be increased.

According to the twelfth embodiment, for example,

when a power voltage has lowered from 3.3V of the present level, the yield of products being subjected to tests in the state in which the products are formed on the wafer can be further increased.

5 In the basic structure of the semiconductor IC device according to the present invention, as shown in FIG. 29, two power systems VCC and VSS for the functional circuits are provided. Of the two, the power system VSS is common to a bias system of the substrate.

10 FIG. 30 schematically shows the state in which the chip shown in FIG. 29 is subjected to a multiple test. FIG. 30 shows only the power system.

As is shown in FIG. 30, chips 1A to 1D are formed on a single wafer 11. A tester 300 has VCC generators 301A to 301D corresponding to the chips 1A to 1D.
15 The VCC generator 301A to 301D generate powers for the chips 1A to 1D, i.e. high potential VCC and low potential VSS, from a potential difference between intra-tester high potential V and intra-tester ground potential GND. The generated high potential VCC and
20 low potential VSS are supplied to the chips 1A to 1D. The high potential power VCC is used as high potential power for operating integrated circuits, and the low potential power VSS as low potential power for operating the integrated circuits and bias potential for the
25 P-type substrate.

FIG. 31 is an equivalent circuit diagram of the

structure shown in FIG. 30. In FIG. 31, the integrated circuits formed in the chips 1A to 1D are shown as loads RA to RD.

As is shown in FIG. 31, in the state in which the chips 1A to 1D are being tested at a time, electric currents are flowing through the loads RA to RD at the same time. The currents, which have passed through the loads RA to RD, flow to the low potential supplies VSS. The low potential supplies VSS are mutually connected via the wafer 11. Ripples of power (VCCA, VSSA) supplied to the chip 1A, ..., power (VCCD, VSSD) supplied to the chip 1D become ripple high-frequency waves of the respective powers and are applied across the loads RA to RD. This state is shown in FIG. 32.

FIG. 32 schematically shows ripples of powers supplied to the respective chips shown in FIG. 30.

In FIG. 32, reference numeral 400A is a ripple of power to the chip 1A, 400B a ripple of power to the chip 1B, 400C a ripple of power to the chip 1C, and 400D a ripple of power to the chip 1D. When the chips 1A to 1D are tested one by one, ripples of powers to the chips 1A to 1D will occur, as indicated by reference numerals 400A to 400D.

However, when the chips 1A to 1D are tested at the same time, the ripples of the powers, indicated by numerals 400A to 400D, overlap one another and become high-frequency waves, as indicated by numeral 401.

Thus, the ripples of powers to the chips 1A to 1D become high-frequency waves, as indicated by reference numerals 401A to 401D.

5 Suppose that while the chips 1A to 1D are being tested at a time, a large current has flown from the high potential VCCC to low potential VSSC of the chip 1C owing to a defect in the chip 1C. In this case, as indicated by reference numeral 400C, the ripple of power to chip 1C increases and becomes a great high-
10 frequency wave 401. Consequently, the ripples of powers to the chips, which are indicated by reference numerals 401A to 401D increase. With reduction in size of transistors, the power voltage has been gradually decreased from 5V to 3.3V to 2.5V, If a
15 large ripple occurs in the power when the power voltage has decreased to a very low level, the power voltage decreases below a guaranteed operational voltage of the transistor, as indicated by reference numeral 402, or increases above a guaranteed withstand voltage of the
20 operational transistor. If the power voltage decreases below the guaranteed operational voltage, operational defects will occur in the chips 1A, 1B and 1D, in addition to the defective chip 1C, and these chips will be determined to be defective at the time of tests.
25 On the other hand, if the power voltage rises above the guaranteed withstand voltage of transistors, the transistors of chips 1A, 1B and 1C will be broken.

Such problems would become more serious as the reduction in size and power voltage of transistors will progress.

At present, the number of chips to be tested simultaneously is small, for example, four, eight or 16. In the future, however, the number will increase to 32, 64, and more, and at last all chips on the wafer 11 will be tested. In this case, for example, 31 chips, 63 chips or, in the worst case, all chips on the wafer 11 will become defective because of the presence of one defective chip.

Under the circumstances, it is expected that when chips operable at lower voltage are tested in a multiple manner, the yield of tested products on the wafer will decrease in the future.

In order to solve this problem, there is an idea of testing chips 1A to 1D one by one. In this case, however, the time for a test for one wafer increases, resulting in a decrease in through-put.

FIG. 33 shows a system configuration of the test system according to the twelfth embodiment of the invention.

In order to prevent a decrease in through-put and yield of tested products, it would be advisable to use a per-site type test system, as shown in FIG. 33, and to test a plurality of wafers 11A to 11D at a time. In the per-site type test system, one chip of each of

wafers 11A to 11D is tested.

As has been described above, if the semiconductor IC devices of the first to eleventh embodiments are tested by the per-site test system of the twelfth embodiment, the decrease in through-put and yield of tested products can be prevented.

A 13th embodiment and a 14th embodiment of the present invention will now be described.

The per-site type test system having a plurality of test stations 200A to 200D, as shown in FIG. 33, is expensive. The per-site test system thus incurs a great deal of facility investment.

The 13th embodiment of the invention provides a semiconductor IC device, wherein even if a plurality of chips formed on a single wafer are tested simultaneously, it is possible to suppress high-frequency waves due to ripple of power and to prevent a decrease in yield of tested products on the wafer. The 14th embodiment provides a test system for the IC device of the 13th embodiment.

FIG. 34 is a plan view showing a basic structure of the semiconductor IC device according to the 13th embodiment.

In the semiconductor IC device according to the 13th embodiment, as shown in FIG. 34, a power supply system (VCC, VSS) of the IC is separated from a bias system (VSS-SUB) of the substrate on chip 1'.

Specifically, within the chip 1', a line 501 of low potential VSS-SUB used for bias of the substrate is not connected to a line 502 of low potential VSS used for power to the IC. The line 501 is supplied with low potential VSS-SUB via a pad 503, and the line 502 is supplied with low potential VSS via a pad 504 different from the pad 503. A line 505 is used to supply high potential VCC. The line 505 is supplied with high potential VCC via a pad 506.

FIG. 35 schematically shows the state in which the chip shown in FIG. 34 is subjected to a multiple-test. FIG. 35 shows the power supply system alone.

As is shown in FIG. 35, a tester 300' has VCC generators 301A to 301D associated with chips 1'A to 1'D. A high potential VCC generated by the VCC generators 301A to 301D and a low potential VSS are supplied to the chips 1'A to 1'D. The high potential VCC is used as high potential power supply for operating the IC, and the low potential VSS is used as low potential power supply for operating the IC.

The tester 300' has bias power terminals 302A to 302D for applying a bias potential to the substrates associated with chips 1'A to 1'D. In the tester 300', since the wafer 11 is formed of P-type silicon, the bias power terminals 302A to 302D are connected to a ground GND within the tester. If the IC device formed on the N-type silicon wafer is to be tested, the bias

power terminals 302A to 302D are connected to a VCC generator (not shown) provided within the tester 300'. It is desirable in this case that the VCC generator be provided to exclusively produce a bias potential, separately from the VCC generators 301A to 301D for the IC.

FIG. 36 is an equivalent circuit diagram of the structure shown in FIG. 35. In FIG. 36, the integrated circuits formed in the chips 1'A to 1'D are shown as loads R'A to R'D.

As is shown in FIG. 36, in the state in which the chips 1'A to 1'D are being tested at a time, electric currents are flowing through the loads R'A to R'D at the same time. The currents, which have passed through the loads R'A to R'D, flow to low potential supplies VSSA to VSSD. The low potentials VSSA to VSSD are separated from the bias potential VSS-SUB of the wafer 11 via PN junctions (PNJ). In addition, the bias potential VSS-SUB is supplied by the tester 300' from a power supply system different from the power supply system of the low potentials VSSA to VSSD. Thus, ripple of power (VCCA, VSSA) supplied to the chip 1'A, ..., ripple of power (VCCD, VSSD) supplied to the chip 1'D are independent of one another. This condition is shown in FIG. 37.

FIG. 37 schematically shows the ripples of powers to the respective chips shown in FIG. 35.

In FIG. 37, reference numeral 400'A denotes a ripple of power to the chip 1'A, numeral 400'B a ripple of power to the chip 1'B, numeral 400'C a ripple of power to the chip 1'C, and numeral 400'D a ripple of power to the chip 1'D. When the chips 1'A to 1'D are tested one by one, ripples of powers to the chips 1'A to 1'D will occur, as indicated by reference numerals 400'A to 400'D.

In addition, since the powers (VCCA to VCCD, VSSA to VSSD) of the chips 1'A to 1'D are separated from the bias potential (VSS-SUB) of the wafer 11 by the PN junctions, ripples of powers to the chips 1'A to 1'D will hardly become such as are shown in FIG. 32 even if the chips 1'A to 1'D are tested simultaneously. Accordingly, the ripples of powers to the chips 1'A to 1'D will remain the same, as shown in FIG. 37.

By virtue of these advantages, in the case where the supply voltage has decreased from 5V to 3.3V to 2.5V and, for example, a great ripple has occurred in the power to the chip 1'C due to its own defect, the powers to the other chips 1'A, 1'B and 1'D will scarcely be influenced. It is thus possible to eliminate causes of malfunctions of the chips 1'A, 1'B and 1'D other than the defective chip 1'C, as well as causes of destruction of the chips 1'A, 1'B and 1'C.

FIG. 38 is a plan view showing the state in which the semiconductor IC device chip according to the 13th

embodiment of the invention is formed on the wafer 11.

In the chip 1' shown in FIG. 38, VSS wiring 502 is formed in a mesh-like manner and VSS-SUB wiring 501 is formed in a loop around the VSS wiring 502. In
5 FIG. 38, VCC wiring 505 is omitted for the purpose of simplification of the drawing.

As is shown in FIG. 38, each of the chips 1' is provided with a pad 503 for supplying potential VSS-SUB, a pad 504 for supplying low potential VSS,
10 and a pad 506 for supplying high potential VCC. The VSS-SUB wiring 501 is separated from the VSS wiring 502 within the chip 1'.

FIG. 39 is a plan view of a packaged chip of the semiconductor IC device according to the 13th embodiment of the invention.
15

When the chip 1' of the 13th embodiment is to be packaged, the pad 503 for biasing of the substrate and the pad 504 for the power of the IC are connected to a lead terminal 507. The lead terminal 507 is a terminal
20 for VSS. Accordingly, the potential of each of the low power supplies of the substrate and IC is set at low potential VSS and the substrate is biased to the low potential VSS. The substrate is biased to the potential VSS and the IC operates normally.

The structure shown in FIG. 39 is merely an
25 example. The pads 503 and 504 may be connected to different terminals, and low potential VSS may be

supplied via the different terminals.

FIG. 40 shows a system configuration of a test system according to a 14th embodiment of the present invention.

5 As is shown in FIG. 40, in the test system according to the 14th embodiment, a tester 300' is used and four chips 1'A to 1'D formed on a wafer 11 are tested at the same time. With this system, too, a problem in which a power ripple becomes a high-frequency component
10 can be solved. Accordingly, the test system shown in FIG. 40 can have the same test precision as the per-site type test system shown in FIG. 33 which comprises four test stations 200A to 200D. In addition, as compared to the per-site test system, the number of
15 test stations 200 can be decreased and the amount of facility investment reduced.

 If a facility investment is made in an equal level to the per-site test system and, for example, the number of test stations is increased up to the number
20 of test stations of the per-site system, the number of chips which can be tested at a time can be increased. In other words, from the standpoint of the facility investment, the processing performance of the test system of the 14th embodiment is higher than that of
25 the test system of the twelfth embodiment.

 As has been described above, in the semiconductor IC device and test system of the 13th and 14th

embodiments, even when a plurality of chips formed on a single wafer are tested at a time, the problem of high-frequency components due to power ripple can be solved and a decrease in yield of tested products on the wafer can be prevented.

A 15th embodiment of the invention will now be described.

The 15th embodiment is an improvement of the tester 300' described in the 13th and 14th embodiments, wherein power ripple occurring at the time of a multi-test can be suppressed more surely.

FIG. 41 shows the structure of a tester according to the 15th embodiment. FIG. 41 shows the power supply system alone.

As is shown in FIG. 41, a tester 300" has VCC generators 301A to 301D associated with the respective chips. The VCC generator 301A supplies high potential VCCA to the chip 1'A (not shown) via a high potential power terminal 303A, and supplies low potential VSSA to the chip 1'A via a low potential power terminal 304A. Similarly, the VCC generator 301B supplies high potential VCCB to the chip 1'B (not shown) via a high potential power terminal 303B, and supplies low potential VSSB to the chip 1'B via a low potential power terminal 304B. The VCC generator 301C supplies high potential VCCC to the chip 1'C (not shown) via a high potential power terminal 303C, and supplies low

potential VSSC to the chip 1'C via a low potential
power terminal 304C. The VCC generator 301D supplies
high potential VCCD to the chip 1'D (not shown) via a
high potential power terminal 303D, and supplies low
5 potential VSSD to the chip 1'D via a low potential
power terminal 304D.

The tester 300" includes power voltage detectors
305A to 305D and shut-off switches 306A to 306D, which
are provided between the VCC generators 301A to 301D
10 and the power terminals 303A to 303D and 304A to 304D.
In addition, the tester 300" includes a detection
voltage determination device (judgement device) 307 for
determining whether detected voltages detected by the
detectors 305A to 305D fall within a normal range, and
15 switch drivers 309 for driving the shut-off switches
306A to 306D.

The operation of the tester 300" will now be
described.

The detectors 305A to 305D detect variations in
20 power voltages to the chips 1'A to 1'D while the chips
1'A to 1'D are being operated. The voltages detected
by the detectors 305A to 305D are sent to the detected
voltage determination device 307. The detected voltage
determination device 307 determines whether the varia-
25 tions in power voltages to the chips 1'A to 1'D fall
within the normal range. If it is determined that the
variation in voltage falls out of the normal range,

the determination device 307 outputs to the CPU 308
a signal representing the chip in which the variation
in voltage outside the normal range has occurred.
Suppose that a voltage variation without the normal
5 range has occurred in the chip 1'C. In this case, the
determination device 307 outputs to the CPU 308 a
signal indicating that a voltage variation outside the
normal range has occurred in the chip 1'C. The CPU 308
outputs to the switch driver 309 a command (signal) to
10 shut off the power to the chip 1'C. The switch driver
309 drives the shut-off switch 306C to shut off the
power line for supplying a power voltage to the chip
1'C. The driven shut-off switch 306C cuts off the
connection between the VCC generator 301C and power
15 terminals 303C and 304C. As a result, no power is
supplied to the chip 1'C in which the voltage variation
without the normal range has occurred, and the opera-
tion of the chip 1'C is stopped.

According to the tester 300", when a great ripple
20 has occurred in the chip 1'C among the simultaneously
tested chips, for example, as shown in FIG. 37, the
operation of the chip 1'C can be stopped. Thus, power
ripples in the other chips 1'A, 1'B and 1'D can be
further decreased.

25 This tester 300" capable of further decreasing
power ripples can enhance its own test precision
through the above operation, for example, in an IDDQ

(static current measurement in a functional test)
in which precision, among the other test items of
semiconductor IC devices, is required.

5 A description will now be given of 16th, 17th,
18th and 19th embodiments of the present invention.

The chip according to the 13th embodiment is
applied to a semiconductor IC device (system-on-silicon
technique) wherein a desired semiconductor device
system constituted by a combination of a processor,
10 an SRAM, a DRAM and a flash-EEPROM is integrated in
one chip. However, the chip according to the 13th
embodiment, i.e. the chip with enhanced test precision
in a multi-test, is applicable not only to the system-
on-silicon technique, but also to a product with a
15 single function such as a processor chip, an SRAM chip,
a DRAM chip, or a flash-EEPROM chip. These products
with single functions are interconnected on a circuit
board to constitute a desired semiconductor device
system.

20 Typical examples of chips according to the 13th
embodiment, which are applied to semiconductor IC
devices with single functions, will now be described.
First, a processor (16th embodiment) will be described;
second, a DRAM (17th embodiment); third, a NAND type
25 flash-EEPROM (18th embodiment); and fourth, a D/A
converter (19th embodiment). Needless to say, the
chip of the 13th embodiment is applicable to other

semiconductor IC devices with single functions, e.g.
an SRAM, an analog product, a logic product, etc.

FIGS. 42A and 42B show the processor according to
the 16th embodiment of the invention. FIG. 42A is a
5 plan view, and FIG. 42B is a cross-sectional view taken
along line 42B-42B in FIG. 42A. In FIGS. 42A and 42B,
the circuit configuration of the processor is divided
into three blocks: an internal voltage generator 51-2
for generating an internal voltage; logic circuits 52-2
10 for constituting an arithmetic operation circuit, a
register circuit, etc.; I/O circuits 53-2 for outputting
a signal processed within the chip and inputting a
signal to the chip.

As is shown in FIGS. 42A and 42B, a large N-well
15 22-2 is formed in a P-type silicon substrate 10. the
three circuit blocks constituting the processor, i.e.
the internal voltage generator 51-2, logic circuits
52-2 and I/O circuits 53-2, are arranged in the large
well 22-2.

20 High-concentration P+ wells 23A-2 and 23B-2, high-
concentration wells 24A-2 and 24B-2 having higher
concentrations than the N-well 22-2, and a P-well 25-2
are formed in the N-well 22-2. A high-concentration N+
well 26-2 and a high-concentration P+ well 27-2 having
25 a higher concentration than the P-well 25-2 are formed
in the P-well 25-2.

The N-well 22-2 is supplied with external high

potential VCC as bias potential. The P-well 25-2 is supplied with external low potential VSS as bias potential.

5 The internal voltage generator 51-2 comprises an NMOS (not shown) formed in the P+ well 23A-2 and a PMOS (not shown) formed in the N+ well 24A-2. The N+ well 24A-2 is supplied with power VCC as back-gate bias and source potential of the PMOS. The P+ well 23A-2 is supplied with external low potential VSS as back-gate
10 bias and source potential of the NMOS. The internal voltage generator 51-2 is driven by potential difference (VCC-VSS) to produce a predetermined internal potential VDD'.

15 The logic circuits 52-2 comprise an NMOS (not shown) formed in the P+ well 27-2 and a PMOS (not shown) formed in the N+ well 26-2. The N+ well 26-2 is supplied with internal potential VDD' as back-gate bias and source potential of the PMOS. The P+ well 27-2 is supplied with external low potential VSS as
20 back-gate bias and source potential of the NMOS. The logic circuits 52-2 are driven by potential difference (VDD'-VSS) to perform predetermined arithmetic operations.

25 The I/O circuits 53-2 comprise an NMOS (not shown) formed in the P+ well 23B-2 and a PMOS (not shown) formed in the N+ well 24B-2. The N+ well 24B-2 is supplied with power VCC as back-gate bias and source

potential of the PMOS. The P+ well 23B-2 is supplied with external low potential VSS as back-gate bias and source potential of the NMOS. The I/O circuits 53-2 are driven by potential difference (VCC-VSS) to effect input/output of predetermined signals.

As is shown in FIG. 42A, the power VCC is supplied to a VCC line 505 within the chip via a pad 506. Power VSS is supplied to a VSS line 502 within the chip via a pad 504. A VSS-SUB line 501 for applying a substrate bias potential to the P-type substrate 10 is provided within the chip, separately from the VSS line 502. As is shown in FIG. 42B, power VSS is supplied to the VSS-SUB line 501 via pad 503 during actual use. While the devices formed on the wafer are being tested, a substrate power VSS-SUB, which is different from the power VSS though being equal in potential, is supplied to the VSS-SUB line 501.

This processor, like the chips described in the 13th and 14th embodiments, has, within the chip, a power system for substrate bias and a power system for the IC separately. Accordingly, even if a plurality of chips formed on the wafer are tested at the same time (i.e. subjected to a multi-test), ripple of power to each chip can be reduced. Thus, a multi-test can be performed with high precision, and the yield of tested products on the wafer can be increased.

FIGS. 43A and 43B show a DRAM according to the

17th embodiment of the invention. FIG. 43A is a plan view, and FIG. 43B is a cross-sectional view taken along line 43B-43B in FIG. 43A. In FIGS. 43A and 43B, the circuit configuration of the DRAM is divided into four blocks: an internal voltage generator 51-4 for
5 generating an internal voltage, memory cells 54-4 for storing information, memory peripheral circuits 55-4 for writing/reading data in/from the memory cells, and I/O circuits 53-4.

10 As is shown in FIGS. 43A and 43B, a large N-well 22-4 is formed in a P-type silicon substrate 10. The four circuit blocks constituting the DRAM, i.e. the internal voltage generator 51-4, memory cells 54-4, peripheral circuits 55-4 and I/O circuits 53-4, are
15 arranged in the large well 22-4.

High-concentration P+ wells 23A-4 and 23B-4, high-concentration N+ wells 24A-4 and 24B-4, and P-wells 25A-4 and 25B-4 are formed in the N-well 22-4. In addition, a high-concentration N+ well 26B-4 and a
20 high-concentration P+ well 27B-4 are formed in the P-well 25B-4.

The N-well 22-4 is supplied with external high potential VCC as bias potential, like the 16th embodiment. The P-well 25B-2 is supplied with external low
25 potential VSS as bias potential.

The internal voltage generator 51-4 is constituted by an NMOS (not shown) formed in the P+ well 23A-4 and

a PMOS (not shown) formed in the N+ well 24A-4. The N+ well 24A-4 is supplied with power VCC as back-gate bias of the PMOS and source potential of the PMOS. The P+ well 23A-4 is supplied with external low potential VSS as back-gate bias and source potential of the NMOS. The internal voltage generator 51-4 is driven by a potential difference (VCC-VSS) to generate a positive internal potential VDD' and a negative internal potential VBB.

A currently available DRAM is provided with internal potentials: potential VPP for boosting and driving word lines (not shown), plate potential VPL applied to a plate electrode of a capacitor, and precharge potential VBL for precharging bit lines (not shown) before reading out data. These internal potentials, however, are omitted in the 17th embodiment. Similarly, peripheral circuits using internal potentials VPP, VPL and VBL are omitted.

The memory cells 54-4 are formed in the P-well 25A-4. The memory cells 54-4 are of dynamic type. The dynamic memory cell 54-4 comprises a capacitor (not shown) for storing information as charge, and an NMOS (transfer transistor, not shown) having a source connected to the capacitor, a drain to the bit line (not shown) and a gate to the word line (not shown). The P-well 25A-4 is supplied with internal negative potential VBB as back-gate bias of the NMOS (transfer

transistor).

Each of the peripheral circuits 55-4 is constituted by a combination of an NMOS (not shown) formed in the P+ well 27B-4 and a PMOS (not shown) formed in the N+ well 26B-4. The N+ well 26B-4 is supplied with internal potential VDD' as back-gate bias and source potential of the PMOS. The P+ well 27B-4 is supplied with external low potential VSS as back-gate bias and source potential of the NMOS. The peripheral circuits 55-4 is driven by a potential difference (VDD'-VSS).

Each of the I/O circuits 53-4 comprises a combination of an NMOS (not shown) formed in the P+ well 23B-4 and a PMOS (not shown) formed in the N+ well 24B-4. The N+ well 24B-4 is supplied with power VCC as back-gate bias and source potential of the PMOS. The P+ well 23B-4 is supplied with external low potential VSS as back-gate bias and source potential of the NMOS. The I/O circuits 53-4 are driven by a potential difference (VCC-VSS).

As shown, in particular, in FIG. 43A, like the 16th embodiment, the VSS line 502 for applying power voltage to the DRAM formed in the N-well 22-4 is separated from the VSS-SUB line 501 for applying bias voltage to the P-type substrate 10.

Thus, in the DRAM according to the 17th embodiment, too, the VSS line 502 can be supplied with potential VSS and the VSS-SUB line 501 with potential

VSS-SUB in the test of the wafer, as shown in FIG. 43B, in particular.

In the 17th embodiment, like the 16th embodiment, the power VSS to the DRAM formed in the N-well 22-4 and the bias potential VSS-SUB to the P-type substrate can be supplied separately during the test of the wafer. Accordingly, even if a plurality of chips formed on the wafer are tested simultaneously, ripple of power to each chip can be reduced. Therefore, a multi-test can be performed with high precision and the yield in tested products on the wafer improved.

FIGS. 44A and 44B show a flash-EEPROM according to the 18th embodiment of the invention. FIG. 44A is a plan view, and FIG. 44B is a cross-sectional view taken along line 44B-44B in FIG. 44A. In FIGS. 44A and 44B, the circuit configuration of the flash-EEPROM is divided into four blocks: an internal voltage generator 51-5 for generating an internal voltage, memory cells 54-5 for storing information, memory peripheral circuits 55-5 for writing/reading data in/from the memory cells, and I/O circuits 53-5.

As is shown in FIGS. 44A and 44B, a large N-well 22-5 is formed in a P-type silicon substrate 10. The four circuit blocks constituting the EEPROM, i.e. the internal voltage generator 51-5, memory cells 54-5, peripheral circuits 55-5 and I/O circuits 53-5, are arranged in the large well 22-5.

In the N-well 22-5, P-wells 25A-5, 25B-5, 25C-5 and 25D-5 are formed. Of these P-wells, the P-well 25B-5 includes a high-concentration N+ well 26B-5 and a high-concentration P+ well 27B-5 are formed. Similarly, a high-concentration N+ well 26C-5 and a high-concentration P+ well 27C-5 are formed in the P-well 25C-5, and a high-concentration N+ well 26D-5 and a high-concentration P+ well 27D-5 are formed in the P-well 25D-5.

The bias potential of the N-well 22-5 is switched according to the three basic operational modes of the flash-EEPROM. In a data write mode (WRITE), the power to the N-well 22-5 is biased to external high potential VCC or internal power VDD', as shown in FIGS. 44A and 44B. In a data read-out mode (READ), like the data write mode (WRITE), the N-well 22-5 is biased to external high potential VCC or internal power VDD', as shown in FIGS. 44A and 44B. In a data erase mode (ERASE), the N-well 22-5 is set at a positive potential VEE higher than power VCC.

The P-wells 25B-5, 25C-5 and 25D-5 are biased to external low potential VSS.

The internal voltage generator 51-5 is constituted by an NMOS (not shown) formed in the P+ well 27B-5 and a PMOS (not shown) formed in the N+ well 26B-5. The N+ well 26B-5 is supplied with power VCC as back-gate bias of the PMOS and source potential of the PMOS. The

P+ well 27B-5 is supplied with external low potential VSS as back-gate bias and source potential of the NMOS. The internal voltage generator 51-5 is driven by a potential difference (VCC-VSS) to generate a positive internal potential VDD', a positive internal potential VEE higher than the power VCC, and a negative internal potential VBB.

A currently available flash-EEPROM, in particular, a NAND type flash-EEPROM, is provided with internal potentials: potential VPP supplied to a selected word (not shown) in the data write mode, an internal potential of VM, etc. supplied to non-selected word lines in the write mode, and/or external potential. In the 18th embodiment, these potentials are not described. Similarly, peripheral circuits using potentials VPP and VM are omitted.

The memory cells 54-5 are formed in the P-well 25A-5. The memory cells 54-5 are of non-volatile type. The non-volatile memory cell 54-5 comprises a threshold variable transistor which stores information in the form of a threshold voltage. The threshold variable transistor has a floating gate in a gate insulating film. According to the amount of electrons accumulated in the floating gate, the threshold voltage is varied. The memory cells 54-5 have a so-called unit cell structure wherein 8 or 16 threshold-variable transistors are series-connected, and the memory cells 54-5 are of NAND

type. The source of the unit cell is connected to a source line (not shown) and the drain thereof to a bit line (not shown).

5 The bias potential of the P-well 25A-5 is switched according to the three basic operational modes of the flash-EEPROM. In the data write mode (WRITE), the bias potential to the P-well 25A-5 is set at a negative internal potential VBB. In the data read-out mode (READ), the bias potential to the P-well 25A-5 is set
10 at power VSS. In the data erase mode (ERASE), the bias potential to the P-well 25A-5 is set at potential VEE.

Each of the peripheral circuits 55-5 is constituted by a combination of an NMOS (not shown) formed in the P+ well 27C-5 and a PMOS (not shown) formed in the
15 N+ well 26C-5. The N+ well 26C-5 is supplied with internal potential VDD' as back-gate bias and source potential of the PMOS. The P+ well 27C-5 is supplied with external low potential VSS as back-gate bias and source potential of the NMOS. The peripheral circuits
20 55-5 is driven by a potential difference (VDD'-VSS).

Each of the I/O circuits 53-5 comprises a combination of an NMOS (not shown) formed in the P+ well 27D-5 and a PMOS (not shown) formed in the N+ well 26D-5.
The N+ well 26D-5 is supplied with power VCC as back-gate bias and source potential of the PMOS. The P+
25 well 27B-5 is supplied with external low potential VSS as back-gate bias and source potential of the NMOS.

The I/O circuits 53-5 are driven by a potential difference (VCC-VSS).

As shown, in particular, in FIG. 44A, like the 16th and 17th embodiments, the VSS line 502 for
5 applying power voltage to the flash-EEPROM formed in the N-well 22-5 is separated from the VSS-SUB line 501 for applying bias voltage to the P-type substrate 10.

Thus, in the flash-EEPROM according to the 18th embodiment, like the 16th and 17th embodiments, the VSS
10 line 502 can be supplied with potential VSS and the VSS-SUB line 501 with potential VSS-SUB in the test of the wafer, as shown in FIG. 44B, in particular.

Accordingly, the power VSS to the flash-EEPROM and the bias potential VSS-SUB to the P-type substrate 10
15 can be supplied separately during the test of the wafer. Therefore, a multi-test can be performed with high precision and the yield in tested products on the wafer improved.

FIGS. 45A and 45B show a D/A converter according to the 19th embodiment of the invention. FIG. 45A is a
20 plan view, and FIG. 45B is a cross-sectional view taken along line 45B-45B in FIG. 45A. In FIGS. 45A and 45B, the circuit configuration of the D/A converter is divided into four blocks: an internal voltage generator
25 51-6 for generating an internal voltage, analog circuits 56-6, digital circuits 57-6 and I/O circuits 53-6.

As is shown in FIGS. 45A and 45B, a large N-well 22-6 is formed in a P-type silicon substrate 10. The four circuit blocks constituting the D/A converter, i.e. the internal voltage generator 51-6, analog circuits 56-6, digital circuits 57-6 and I/O circuits 53-6.

In the N-well 22-6, high-concentration P+ wells 23A-6 and 23B-6, high-concentration N+ wells 24A-6 and 24B-6, and P-wells 25A-6 and 25B-6 are formed. Similarly, a high-concentration N+ well 26A-6 and a high-concentration P+ well 27A-6 are formed in the P-well 25A-6, and a high-concentration N+ well 26B-6 and a high-concentration P+ well 27B-6 are formed in the P-well 25B-6.

The N-well 22-6 is supplied with external high potential VCC as bias potential. The P-wells 25A-6 and 25B-6 are supplied with external low potential VSS as bias potential.

The internal voltage generator 51-6 is constituted by an NMOS (not shown) formed in the P+ well 23A-6 and a PMOS (not shown) formed in the N+ well 24A-6. The N+ well 24A-6 is supplied with power VCC as back-gate bias of the PMOS and source potential of the PMOS. The P+ well 23A-6 is supplied with external low potential VSS as back-gate bias and source potential of the NMOS. The internal voltage generator 51-6 is driven by a potential difference (VCC-VSS) to generate an internal

potential VDD' for analog circuits and an internal potential VDD" for digital circuits.

Each of the analog circuits 56-6 is constituted by an NMOS (not shown) formed in the P+ well 27A-6 and a PMOS (not shown) formed in the N+ well 26A-6. The N+ well 26A-6 is supplied with internal potential VDD' as back-gate bias and source potential of the PMOS. The P+ well 27A-6 is supplied with external low potential VSS as back-gate bias and source potential of the NMOS. The analog circuits 56-6 are driven by a potential difference (VDD'-VSS).

Each of the digital circuits 57-6 is constituted by an NMOS (not shown) formed in the P+ well 27B-6 and a PMOS (not shown) formed in the N+ well 26B-6. The N+ well 26B-6 is supplied with internal potential VDD' as back-gate bias and source potential of the PMOS. The P+ well 27B-6 is supplied with external low potential VSS as back-gate bias and source potential of the NMOS. The digital circuits 57-6 are driven by a potential difference (VDD"-VSS).

Each of the I/O circuits 53-6 comprises a combination of an NMOS (not shown) formed in the P+ well 23B-6 and a PMOS (not shown) formed in the N+ well 24B-6. The N+ well 24B-6 is supplied with power VCC as back-gate bias and source potential of the PMOS. The P+ well 23B-6 is supplied with external low potential VSS as back-gate bias and source potential of the NMOS.

The I/O circuits 53-6 are driven by a potential difference (VCC-VSS).

5 As shown, in particular, in FIG. 45A, like the 16th to 18th embodiments, the VSS line 502 for applying power voltage to the D/A converter formed in the N-well 22-6 is separated from the VSS-SUB line 501 for applying bias voltage to the P-type substrate 10.

10 Thus, in the D/A converter according to the 19th embodiment, like the 16th and 18th embodiments, the VSS line 502 can be supplied with potential VSS and the VSS-SUB line 501 with potential VSS-SUB in the test of the wafer, as shown in FIG. 45B, in particular.

15 Accordingly, the power VSS to the D/A converter and the bias potential VSS-SUB to the P-type substrate 10 can be supplied separately during the test of the wafer. Therefore, a multi-test can be performed with high precision and the yield in tested products on the wafer improved.

20 A 20th embodiment of the present invention will now be described.

25 The 20th embodiment aims at providing a semiconductor IC device, wherein even if a plurality of chips formed on a single wafer are tested simultaneously, ripple of the power can be reduced and a test can be performed with higher precision.

Of the circuit blocks constituting the IC, the I/O circuit block is supplied with power in which greatest

ripple will occur. In particular, the output circuit in the I/O circuits directly drives an external terminal (e.g. a lead terminal shown in FIG. 39) of the semiconductor IC device. Specifically, the output
5 circuit supplies a current to the external terminal from the VCC line in the chip (e.g. VCC line 505 shown in FIG. 42A) and charges the external terminal. Alternatively, a current is let to flow from the external terminal to the VCC line (e.g. VSS line 502
10 shown in FIG. 42A) in the chip, thus discharging the external terminal. In particular, the capacity of the external terminal is greater than that of the internal wiring of the IC. Thus, a decrease in potential of the VCC line, which occurs when the output circuit drives
15 the external terminal, or an increase in potential of the VSS line is much greater than in the case of driving the internal circuit. As a result, ripple of power appearing at the VCC pad 506 and VSS pad 504 shown in, e.g. FIG. 42A increases.

20 In the 20th embodiment, attention is paid to this problem. The 20th embodiment aims at decreasing the ripple of power appearing at the VCC pad 506 and VSS pad 504.

25 A DRAM according to the 20th embodiment will now be described.

FIGS. 46A and 46B show the DRAM according to the 20th embodiment of the invention. FIG. 46A is a plan

view and FIG. 46B is a cross-sectional view taken
along line 46B-46B in FIG. 46A. In FIGS. 46A and 46B,
the structural elements common to those in FIGS. 42A
and 42B are denoted by like reference numerals, and
5 different elements alone will be described.

As is shown in FIGS. 46A and 46B, the DRAM
according to the 20th embodiment differs from the DRAM
according to the 17th embodiment with respect to I/O
circuits 53'-4. The I/O circuits 53'-4 are formed in
10 the P-well 25C-4 formed in the N-well 22-4. A bias
potential to the P-well 25C-4 is applied not from the
VSS line 502 but from another power line. In the DRAM
shown in FIGS. 46A and 46B, the bias potential to the
P-well 25C-4 is applied from a line 551 of negative
15 internal potential VBB as the other power line. The
negative internal potential VBB is generated by the
internal potential generator 51-4 and supplied to the
P-well 25C-4 via the line 551. The power VSS may be
substituted. In this case, it is desirable that a VSS-
20 WELL line be provided in the chip, in addition to the
VSS line 502 and VSS-SUB line 501, and that potentials
of different VSS levels be applied to the VSS line 502,
VSS-SUB line 501 and VSS-WELL line during the test.

A high-concentration N+ well 26C-4 and a high-
25 concentration P+ well 27C-4 are formed in the P-well
25C-4.

Each of the I/O circuits 53'-4 comprises

a combination of an NMOS (not shown) formed in the P+ well 27C-4 and a PMOS (not shown) formed in the N+ well 26C-4. The N+ well 26C-4 is supplied with a positive internal potential VCC as back-gate bias and source potential of the PMOS. A positive internal potential VDD" is generated by the internal potential generator 51-4 and applied to the N+ well 26C-4 via a line 552 different from the VCC line 505. The P+ well 27C-4 is supplied with a negative internal potential VBB as back-gate bias and source potential of the NMOS. The I/O circuits 53-4 are driven by a potential difference (VDD"-VBB).

In the DRAM, when the output circuit, in particular, of the I/O circuits 53'-4 charges an external terminal (not shown), an electric current is let to flow to the external terminal from the line 552 different from the VCC line 505. When the external terminal is discharged, a current is let to flow to the line 551 different from the VSS line 502. Accordingly, the charge/discharge current does not directly flow from the VCC line 505 or to the VSS line 502. Thus, the problem of the decrease in potential of the VCC line, which occurs when the output circuit of I/O circuits 53'-4 drives the external terminal, or of the increase in potential of the VSS line is solved and the ripple of power appearing at the VCC pad 506 and VCC pad 504 is decreased.

Since ripple of small power, which occurs due to the operation of the chip, can be further decreased, a plurality of chips formed on a single wafer can be tested at a time with higher precision.

5 Needless to say, the I/O circuits in the semiconductor IC device according to the 20th embodiment is applicable not only to the DRAM but also to various semiconductor IC devices, such as a processor, a flash-EEPROM, a D/A converter and an SRAM, which are
10 currently available.

A 21st embodiment of the present invention will now be described.

In the 21st embodiment, the semiconductor IC device according to the 20th embodiment is applied to
15 a semiconductor IC device fabricated on the basis of system-on-silicon techniques.

FIG. 47 is a plan view of the semiconductor IC device according to the 21st embodiment. In FIG. 47, the structural elements common to those in FIGS. 42A and 42B through FIGS. 46A and 46B are denoted by like
20 reference numerals, and different elements alone will be described.

As is shown in FIG. 47, in the semiconductor IC device according to the 21st embodiment, the semiconductor device system comprising the processor, DRAM,
25 flash-EEPROM and D/A converter, as described in the 16th to 19th embodiments, is integrated on single

substrate 10 (hereinafter referred to as "1-chip hybrid semiconductor IC device").

5 The I/O circuits described in the 20th embodiment are used as I/O circuits of the 1-chip hybrid semiconductor IC device.

10 The I/O circuits 53'-2 are disposed in the processor block, or one of the four functional blocks. A P-well 25A-2 is formed in the N-well 22-2 in which the processor is formed. The I/O circuits 53'-2 are formed in the P-well 25A-2. A bias potential to the P-well 25A-2 is supplied not from the VSS line 502 but from another line. In the semiconductor IC device shown in FIG. 47, the bias potential is supplied from a line 551 of negative internal potential VBB as the other power line. The negative internal potential VBB is generated by the internal potential generator 51-2 and applied to the P-well 25A-2 via the line 551.

15 The I/O circuits 53'-2 are the same as the I/O circuits 53'-4 which have been described in detail with reference to FIGS. 46A and 46B.

20 In this 1-chip hybrid semiconductor IC device, like the 20th embodiment, when the output circuit, in particular, of the I/O circuits 53'-2 charges an external terminal, an electric current is let to flow to the external terminal from the line 552 different from the VCC line 505. When the external terminal is to be discharged, a current is let to flow to the line

25

551 different from the VSS line 502. Accordingly,
ripple of small power, which occurs due to the operation of the chip, can be further decreased, and a plurality of chips formed on a single wafer can be
5 tested at a time with higher precision.

Tests of the 1-chip hybrid semiconductor IC device includes a test of the entire chip and a test of each functional block, as mentioned above. The precision in tests should be enhanced not only in the test of the
10 entire chip, but also in the test of each functional block.

In 1-chip hybrid semiconductor IC devices, the functional blocks are often connected to one another via an interface circuit (I/F circuit) formed within
15 the chip. In this case, the structure of the I/F circuit may be the same as that of each of the I/O circuits 53-2, 53-4, 53-5 and 53-6 shown in FIGS. 42A and 42B to 45A and 45B. However, it is expected that there is an influence of power ripple caused by each
20 functional block.

In consideration of these circumstances, the power supplies for the I/F circuits 58'-2, 58'-4, 58'-5 and 58'-6 are separated from VCC line 505 and VSS line 502, like the structures of the I/O circuits 53'-2 and
25 53'-4. Thereby, ripple of power produced from each functional block can be reduced.

Accordingly, small power ripple resulting from

the operation of each functional block can be further reduced. The functional blocks on chips formed on a single wafer can be tested at a time with high precision.

5 A 22nd embodiment of the present invention will now be described.

The 22nd embodiment of the invention relates to a semiconductor IC device having I/O circuits matching with power voltages VCC of different levels.

10 Currently available semiconductor products include those with power voltage VCC of 5V and those with power voltage VCC of 3.3V, such as high-integration memories, e.g. 64 MDAMs.

15 In a semiconductor device system comprising these semiconductor products, products with different power voltage levels are formed in a hybrid manner on a single circuit substrate, as a matter of course. In the system constituted by combining products with different power voltage levels in a hybrid manner, an
20 interface circuit is mounted to interconnect these products. The products with different power voltage levels are interconnected on the circuit substrate via the interface circuit.

25 This system, however, has the following problems due to the provision of the interface circuit: 1) difficulty in reducing the size of the circuit substrate, 2) a delay in transmission of signals since

the signals (data) are transmitted via the interface circuit, and 3) a rise in cost of the system itself due to the provision of the interface circuit.

5 In a principal technique currently adopted to solve these problems, a chip is provided with an interface function. In brief, the operational voltage of the I/O circuits is switched from 5V (VCCA[5V])-VSS[0V]) to (VCCB[3.3V]-VSS[0V]). In these I/O circuits, when the operational voltage of the I/O circuits
10 is 5V, the output amplitude is about 5V; when the operational voltage is 3.3V, the output amplitude is about 3.3V.

In the semiconductor product having such I/O circuits, the output amplitude of the I/O circuits is
15 5V or 3.3V. Thus, the semiconductor product can be connected to a product with power voltage of 5V or to a product with power voltage of 3.3V without using an interface circuit.

The above product, however, has a problem in that
20 input/output characteristics slightly vary between a case where the operational voltage of the I/O circuits is 5V and a case where the operational voltage of the I/O circuits is 3.3V. In the present condition in which supply voltages 5V and 3.3V are connected via an
25 interface, such a slight variation in input/output characteristics is ignorable. However, even such a slight variation cannot be ignored in future when

supply voltages 3.3V and 2.5V are connected via an interface. If the supply voltage lowers than the present level, an operational voltage margin of the semiconductor IC device will be narrowed.

5 In addition, it is expected that the data transfer speed within the system will be further increased from the present level. If the data transfer speed is increased, the specifications on input/output characteristics will become stricter.

10 Under the circumstances, the 22nd embodiment provides a semiconductor I/C device having I/O circuits matching with supply voltages VCC of different levels, wherein the output characteristics of the I/O circuits can be made substantially uniform with no deteriora-
15 tion.

FIGS. 48A and 48B schematically show systems constituted by using the semiconductor IC device according to the 22nd embodiment of the invention. FIG. 48A shows a system wherein products with equal
20 power voltage levels are connected, and FIG. 48B shows a system wherein products with different power voltage levels are connected.

The system shown in FIG. 48A comprises a processor 508A and a DRAM 508B which the processor 508A uses as a
25 memory. The power voltages for the processor 508A and DRAM 508B are 3.3V (VCC=3.3V, VSS=0V), respectively.

The chip of the DRAM 508B comprises I/O circuits

53-4 and internal circuits 59B. The internal circuits 59B include the internal potential generator 51-4, memory cells 54-4 and peripheral circuits 55-5, as shown in FIGS. 43A and 43B. The I/O circuits 53-4 and internal circuits 59B are supplied with high potential VCC via VCC line 505.

The chip of the processor 508A comprises the I/O circuits 53" according to the 22nd embodiment and the internal circuits 59A. The internal circuits 59A includes internal potential generator 51-2 and logic circuits 52-2 as shown in, e.g. FIGS. 42A and 42B. The internal circuits 59A are supplied with high potential VCC via VCC line 505A. The I/O circuits 53" are supplied with high potential VCC via VCC line 505B different from VCC line 505A. The VCC line 505A is connected to an external power terminal 570, and the VCC line 505B is connected to an external power terminal 571 different from the external power terminal 570.

When the supply voltage to the DRAM 508B is 2.5V ($V_{CCB}=2.5V$, $V_{SS}=0V$), as shown in FIG. 48B, the I/O circuits 53" of processor 508A are supplied with high potential $V_{CCB}(2.5V)$ via VCC line 505B different from VCC line 505A. The internal circuits 59A are supplied with high potential $V_{CCA}(3.3V)$ via VCC line 505A.

Specific circuit configuration and circuit elements of the I/O circuits 53" will now be described.

FIGS. 49A and 49B show the semiconductor IC device

according to the 22nd embodiment of the invention.
FIG. 49A is a plan view and FIG. 49B is a cross-sectional view taken along line 49B-49B in FIG. 49A.
FIGS. 49A and 49B show only a region near the I/O
circuits 53".

As is shown in FIGS. 49A and 49B, a large N-well 22 is formed in a P-type silicon substrate 10. I/O circuits 53" and internal circuits (not shown) are arranged within the large N-well 22.

A P-well 25 is formed in the N-well 22. A high-concentration N+ well 26 and a high-concentration P+ well 27 are formed in the P-well 25.

The N-well 22 is supplied with external high potential power VCCA as bias potential. The P-well 25 is supplied with external low potential power VSS as bias potential.

The I/O circuits 53" is constituted by an NMOS (not shown) formed in the P+ well 27 and a PMOS (not shown) formed in the N+ well 26. The N+ well 26 is supplied with potential Vbp as back-gate bias of the PMOS. The P+ well 27 is supplied with potential Vbn as backgate bias of the NMOS. The I/O circuits 53" are driven by potential difference (VDDB-VSS).

The potentials Vbp and Vbn have values which vary between a case where the operational voltage (VDDB-VSS, hereinafter referred to as "interface voltage") of the I/O circuits 53" is 3.3V and a case where the

operational voltage is 2.5V. The circuit threshold voltage of the I/O circuits 53" can be varied according to the level of interface voltage of the I/O circuits 53", when the interface voltage is 3.3V and when it is 2.5V. A slight variation in input/output characteristics can be further reduced by varying the circuit threshold voltage of the I/O circuits 53" in accordance with the level of the interface voltage.

For example, suppose that the circuit threshold voltage at the time the interface voltage is 3.3V is "Vth = 1.0V." In this case, the circuit threshold voltage at the time the interface voltage is 2.5V is set to be lower than "Vth = 1.0V", for example, at "Vth = 0.7V." Thereby, in the input circuit, the level of "1" or "0" of an input signal having a voltage amplitude of about 2.5V can be detected at the same timing as in the case of the voltage amplitude of about 3.3V.

According to the I/O circuits 53" having the semiconductor IC device according to the 22nd embodiment, a difference in input/output characteristics between the case where the interface voltage is 3.3V and the case where it is 2.5V can be reduced, and a variation in input/output characteristics of the I/O circuits 53" can be further decreased.

If the variation in input/output characteristics of the I/O circuits 53" due to the interface voltage is

decreased, power ripple produced by the I/O circuits 53" when the interface voltage is 3.3V and power ripple produced by the I/O circuits 53" when the interface voltage is 2.5V are made uniform. Thus, when a plurality of chips formed on a single wafer are tested at a time, occurrence of unexpectable high-frequency waves can be suppressed and high-precision tests performed.

If the I/O circuits 53" are built in the 1-chip hybrid semiconductor IC device described in the first to 15th and 21st embodiments of the invention, this IC device can be connected to other semiconductor devices or electric devices with different supply voltage, without using an interface circuit. Needless to say, the same advantage can be obtained and the system can be constituted easily even if the I/O circuits 53" are built in the semiconductor IC device with the single function as described in the 16 to 20th embodiments. The constituted system permits easy extension.

An example of a back-gate bias potential setting circuit for producing potentials V_{bp} and V_{bn} will now be described.

FIGS. 50A and 50B show a back-gate bias potential setting circuit provided in the semiconductor IC device according to the 22nd embodiment of the invention. FIG. 50A shows a structure of the back-gate bias potential setting circuit, and FIG. 50B shows a relationship between supply voltage and well bias potential.

As is shown in FIG. 50A, the back-gate bias potential setting circuit 60 comprises a VCC level detection circuit 61 for detecting whether the supply voltage VCC is 3.3V or 2.5V; an N-well (26) potential switching circuit 62 for switching the level of potential Vbp according to a detection signal from the detection circuit 61; and a P-well (27) potential switching circuit 63 for switching the level of potential Vbn.

FIG. 50B shows the relationship between the value of supply power VCC and potential Vbp, Vbn output from the voltage setting circuit 60.

As is shown in FIG. 50B, suppose that a set signal CONT.V is at "1" level, when the operational voltage VCCA of the internal circuits is 3.3V and the interface voltage VCCB is 2.5V. When the set signal CONT.V is at "1" level, the detection circuit 61 outputs a signal for activating the switching circuits 62 and 63. while the switching circuit 62 is being activated, the switching circuit 62 outputs potential Vbp of about 4.5V. Similarly, while the switching circuit 63 is being activated, the switching circuit 63 outputs potential Vbn of about -1.5V.

Suppose that the set signal CONT.V is at "0" level, when the operational voltage VCCA of the internal circuits is 3.3V and the interface voltage VCCB is 3.3V. When the set signal CONT.V is at "0" level, the detection circuit 61 outputs a signal for

rendering the switching circuits 62 and 63 inactive.
while the switching circuit 62 is being inactive, the
switching circuit 62 outputs potential Vbp of about
3.3V (=VCCB). Similarly, while the switching circuit
5 63 is being inactive, the switching circuit 63 outputs
potential Vbn of about 0V (=VSS).

As indicated in the table of FIG. 50B showing the
relationship between the input and output, the detec-
tion circuit 61 and switching circuits 62 and 63
10 basically switch the values of potentials Vbp and Vbn,
depending on whether the level of set signal CONT.V is
"1" or "0." Accordingly, if the potential Vbp = 4.5V
and potential Vbn = -1.5V are generated by the internal
potential generating circuit, the detection circuit 61
15 and switching circuits 62 and 62 can be formed of
combinations of logic circuits.

It is also possible to incorporate in the
switching circuit 62 a boosting circuit for boosting
the interface potential VCCB (2.5V or 3.3V) or supply
20 voltage VCC (3.3V), thereby boosting the interface
potential VCCB or supply voltage VCC and setting the
potential Vbp at 4.5V while the switching circuit 62
is being active. In this case, while the switching
circuit 62 is being inactive, the potential Vbp is set
25 at 3.3V by using the interface potential VCCB or supply
voltage VCC.

Similarly, it is possible to incorporate in the

switching circuit 63 a voltage-dropping circuit for lowering low-potential supply power VSS(0V) and to lower the low-potential supply power VSS (0V) while the switching circuit 63 is activated and set the potential Vbp at -1.5V. In this case, while the switching circuit 63 is being inactive, the potential Vbp is set at 0V by using low-potential supply power VSS.

An example of the I/O circuits 53" will now be described.

FIG. 51 shows an input circuit and an output circuit included in the semiconductor IC device according to the 22nd embodiment of the invention.

As is shown in FIG. 51, an output circuit 70 and an input circuit 71 are both CMOS inverters.

The output circuit 70 comprises a PMOS 72 having a source connected to interface voltage VCCB, and an NMOS 73 having a drain connected to the drain of the PMOS 72 and a source connected to low-potential power supply VSS. The gates of the PMOS 72 and NMOS 73 are supplied with an internal signal dout. A connection node between the drain of PMOS 72 and the drain of NMOS 73 is connected to an output pad (not shown). When the internal signal dout is at "0" level, the PMOS 72 charges an external terminal (not shown) up to a level of interface voltage VCCB via the output pad. When the internal signal dout is at "1" level, the NMOS 73 discharges the external terminal to the level of power

supply VSS via the output pad. Thus, the internal signals dout with logical levels "0" and "1" are converted to output signals Dout with logical levels "0" and "1."

5 The input circuit 71 comprises a PMOS 74 having a source connected to high-potential power supply VCCA, and an NMOS 75 having a drain connected to the drain of the PMOS 74 and a source connected to low-potential power supply VSS. The gates of the PMOS 74 and NMOS 75
10 are supplied with an input signal Din via an input pad (not shown). A connection node between the drain of PMOS 74 and the drain of NMOS 75 is an output node of internal signal din. When the internal signal Din is at "0" level, the PMOS 74 sets the level of internal
15 signal din at the level of power supply VCCA. When the input signal Din is at "1" level, the NMOS 75 sets the level of internal signal din at the level of power supply VSS. Thus, the logical level "1" or "0" of the input signal Din is detected, and the input signal Din
20 is input to the internal circuit of the chip as internal signal din with logical level "0" or "1."

FIGS. 52A and 52B show cross-sectional structures of the PMOS 72, PMOS 74, NMOS 73 and NMOS 75.

Specifically, FIG. 52A is a cross-sectional
25 structure of the output circuit and FIG. 52B is a cross-sectional structure of the input circuit.

As is shown in FIG. 52A, the PMOS 72 is formed

in an N+ well 26', and the back-gate of PMOS 72 is supplied with potential Vbp. The NMOS 73 is formed in a P+ well 27', and the back-gate of NMOS 73 is supplied with potential Vbn.

5 As is shown in FIG. 52B, the PMOS 74 is formed in an N+ well 26", and the back-gate of PMOS 74 is supplied with potential Vbp. The NMOS 75 is formed in a P+ well 27", and the back-gate of NMOS 75 is supplied with potential Vbn.

10 The P+ wells 27' and 27" are formed directly in a P-well 25. The P-well 25 is supplied with supply voltage VSS, and the P+ wells 27' and 27" are supplied with potential Vbn. As has been described with reference to FIG. 50B, the potential Vbn may be set at
15 -1.5V. At this time, a potential difference of 1.5V occurs between the P well 25 and P+ wells 27' and 27". In this case, if a current flows from the P well 25 to the P+ wells 27' and 27", the potential of -1.5V of the P+ wells 27' and 27" increases toward the potential
20 of power supply VSS. This problem can be solved by increasing the resistance of the P well 25 and decreasing the resistance of the P+ wells 27' and 27". Preferably, a parasitic resistance R corresponding to a voltage drop of about 1.5V is provided between the
25 P well 25 and P+ wells 27' and 27". The resistance values of the P well 25 and P+ wells 27' and 27" can be varied by controlling the concentration of P-type

impurities. For example, the resistance value of the P well is decreased if the concentration of P-type impurities is increased. If the concentration of P-type impurities is decreased, the resistance value of the P well is increased.

Needless to say, the I/O circuits in the semiconductor IC device according to the 22nd embodiment is applicable not only to the processor but also to various semiconductor IC devices, such as a DRAM, a flash-EEPROM, a D/A converter and an SRAM, which are currently available, as well as to semiconductor IC products using system-on-silicon techniques.

A 23rd embodiment of the present invention will now be described.

FIGS. 53A and 53B show a DRAM according to the 23rd embodiment of the invention. FIG. 53A is a plan view and FIG. 53B is a cross-sectional view taken along line 53B-53B in FIG. 53A. In FIGS. 53A and 53B, the structural elements common to those in FIGS. 46A and 46B are denoted by like reference numerals, and different elements alone will be described.

As is shown in FIGS. 53A and 53B, the DRAM according to the 23rd embodiment differs from that according to the 20th embodiment, in particular, in that the large N-well 22 is divided into an N-well 22A-4 for the memory cells 54-4, an N-well 22B-4 for the internal potential generator 51-4, and an N-well

22C-4 for the peripheral circuits 55-4 and I/O circuits 53'-4.

5 The N-well 22 may be divided into parts associated with the respective circuit functions, as described above. If the N-well 22 is divided according to the respective circuit functions, an influence of electric noise among the circuits is prevented in tests, and tests with high precision can be carried out.

10 A 24th embodiment of the present invention will now be described.

15 FIGS. 54A and 54B show a DRAM according to the 24th embodiment of the invention. FIG. 54A is a plan view and FIG. 54B is a cross-sectional view taken along line 54B-54B in FIG. 54A. In FIGS. 54A and 54B, the structural elements common to those in FIGS. 53A and 53B are denoted by like reference numerals, and different elements alone will be described.

20 As is shown in FIGS. 54A and 54B, the DRAM according to the 24th embodiment differs from that according to the 23th embodiment, in particular, in that a bias potential to the N-wells 22A-4 and 22B-4 is separated from a bias potential to the N-well 22C-4.

25 As described above, the N-well 22 may be divided into parts associated with the respective circuit functions and optimal bias potentials may be applied to the divided wells. If optimal bias potentials are applied to the divided wells, an influence of electric

noise among the circuits is prevented in tests, ripple of supply power is decreased, and tests with high precision can be carried out.

5 The well structures according to the 23rd and 24th embodiments are applicable not only to the DRAM but also to various semiconductor products such as a processor, a flash-EEPROM, a D/A converter and an SRAM.

10 A 25th embodiment of the invention wherein the well structures of the 23rd and 24th embodiments are applied to a flash-EEPROM will now be described.

15 FIGS. 55A and 55B show a flash-EEPROM according to the 25th embodiment of the invention. FIG. 55A is a plan view and FIG. 55B is a cross-sectional view taken along line 55B-55B in FIG. 55A. In FIGS. 55A and 55B, the structural elements common to those in FIGS. 44A and 44B are denoted by like reference numerals, and different elements alone will be described.

20 The flash-EEPROM according to the 25th embodiment differs from that according to the 18th embodiment, in particular, in that the large N-well 22 is divided into an N-well 22A-5 for memory cells 54-5, an N-well 22B-5 for internal potential generator 51-5, and an N-well 22C-5 for the peripheral circuits 55-5 and I/O circuits 53-5.

25 In this flash-EEPROM, the N-well 22 is divided into parts associated with the respective circuit functions. Thus, like the 23rd and 24th embodiments,

an influence of electric noise among the circuits is prevented in tests, and tests with high precision can be carried out.

5 A bias potential, in particular, to the divided well 25A-5 can be switched irrespective of the other wells. Accordingly, for example, when the memory cells 54-5 are tested by using the peripheral circuits 55-5, a variation in potential of the well 25A-5 does not easily influence the well 22C-5. Therefore, tests with
10 high precision can be carried out.

A 26th embodiment of the invention will now be described.

FIGS. 56A and 56B show a DRAM according to the 26th embodiment of the invention. FIG. 56A is a plan
15 view and FIG. 56B is a cross-sectional view taken along line 56B-56B in FIG. 56A. In FIGS. 56A and 56B, the structural elements common to those in FIGS. 54A and 54B are denoted by like reference numerals, and different elements alone will be described.

20 As is shown in FIGS. 56A and 56B, the DRAM according to the 26th embodiment differs from that according to the 23rd embodiment, in particular, in that the N-well for I/O circuits 53'-4 is separated from the N-well for peripheral circuits 55-4. In the figures,
25 the peripheral circuits 55-4 are formed in the N-well 22C-4 and the I/O circuits 53'-4 are in the N-well 22D-4. In addition, the potential to the N-well 22A-4

in which the memory cells 54-4 are formed is biased to internal potential VDD" generated by the internal voltage generator 51-4.

Power supply noise increases in the I/O circuits 53'-4, as described above. Since the well for the I/O circuits 53'-4 is separated from the wells for the other circuits, the other circuits are hardly influenced by electric noise produced by the I/O circuits 53'-4. Thereby, tests with higher precision can be performed.

In addition, the potential to the N-well 22A-4 for the memory cells 54-4 is biased not to external supply voltage VCC but to internal potential VDD" generated by the internal voltage generator 51-4. Thereby, the memory cells 54-4 are still less influenced by the ripple of external supply voltage VCC and the memory cells 54-4 can be tested with high precision.

In FIGS. 56A and 56B, the high-potential power to the I/O circuits 53'-4 is external power VCC. However, it may be internal potential VDD", as in the 20th embodiment. If the internal potential VDD" is used as high-potential power to the I/O circuits 53'-4, it is desirable to set the bias potential of the N-well 22A-4 at a potential different from the internal potential VDD". Thereby, the memory cells 54-4 are still less influenced by electric noise of the I/O circuits 53'-4, and the precision in tests can be further

improved.

The well structure of the 26th embodiment wherein the I/O circuits are separated from the other circuits can be applied not only to the DRAM but also to various semiconductor products such as a processor, a flash-
5 EEPROM, a D/A converter and an SRAM.

A 27th embodiment of the present invention will now be described.

The 27th embodiment relates to a test of a flash-
10 EEPROM, in particular, to a test of a flash-EEPROM wherein data is erased by releasing electrons to the substrate.

A NAND type flash-EEPROM is known as an example of the flash-EEPROM wherein data is erased by releasing
15 electrons to the substrate.

The NAND type flash-EEPROM comprises integrated memory cells each having a floating gate and a control gate capacitive-coupled to a channel via the floating gate. Such an amount of electrons that corresponds to
20 the level of data is accumulated in the floating gate. The electrons in the amount corresponding to the level of data varies the threshold voltage of the memory cell in accordance with the level of data. The memory cell stores predetermined data on the basis of the threshold
25 voltage.

In the NAND type flash-EEPROM, when data is to be erased, voltage VSS is applied to the control gate and

high positive voltage VEE to the substrate and a P well in which the channel of the memory cell is formed. Thereby, electrons accumulated in the floating gate are released to the well.

5 When data is to be written, a voltage is applied between the source and drain and positive voltage VM is applied to the control gate to render the memory cell conductive, in the state in which voltage VCC is applied to the substrate and negative voltage VBB is
10 applied to the well. In this state, positive voltage VPP, which is higher than voltage VM, is applied to the control gate of the selected memory cell selected for data write. Thus, electrons are injected in the floating gate.

15 The erase/write characteristics of the memory cells which erase/write data in the above manner vary, depending on a structurally parasitic capacitance such as capacitance Ccf between the control gate and float-
20 ing gate or capacitance Cfc between the floating gate and channel. Recently developed memory cells have been miniaturized to such a degree that the erase/write characteristics are influenced by a slight variation in structurally parasitic capacitance due to, in particu-
25 lar, "fluctuation in manufacture." Such a variance in capacitance is small among chips or location areas, but large among wafers in which chips are integrated. For example, even if a conductive film or an insulating

film is deposited/grown on the wafer, the thickness and quality of the film are not uniform. There is a great difference in film thickness/quality, for example, between the central portion and peripheral portion of the wafer.

5

Recently, in order to solve this problem, when data is written or erased, optimal voltages VPP, VEE and VBB are applied to memory cells, wells in which the memory cells are formed, and substrates in which the wells are formed, on a chip-by-chip basis.

10

However, in the case of flash-EEPROMs in which optimal voltages VPP, VEE and VBB are set for individual chips, tests for data erase ("erase tests") cannot be performed at the same time on the chips formed on a single wafer. Specifically, since an N-type silicon substrate is an N-type silicon wafer itself, only one voltage VEE can be set even if erasure tests are to be performed simultaneously on the chips formed on the single wafer. Thus, in the case of flash-EEPROMs in which optimal voltage VEE is set for individual chips, erasure tests are performed on the chips on the wafer one by one. As a result, the test time for one wafer increases, resulting a lower through-put.

15

20

However, in the one-chip hybrid semiconductor IC devices, as described in the first to 15th and 21st embodiments, and in the flash-EEPROMs, as described in the 18th and 25th embodiments, the flash-EEPROM is

25

formed in the well 22-5 provided in the substrate 10. Even if the erase tests are conducted on the chips formed on a single wafer, optimal voltage VEE can be set for each chip.

5 FIGS. 57A and 57B illustrate a multi-test method for a flash-EEPROM according to a 27th embodiment of the invention. FIG. 57A is a plan view of a wafer on which a plurality of flash-EEPROM chips are formed, and
10 FIG. 57B is across-sectional view taken along line 57B-57B in FIG. 57A.

As is shown in FIGS. 57A and 57B, voltages VEE with different values are applied to the respective wells 22-5. The voltages VEE with the different values are optimally set for the respective chips.

15 According to this multi-test method, erase tests for the flash-EEPROMs in which voltage VEE is set at optimal value on a chip-by-chip basis can be performed simultaneously on the chips formed on the single wafer. Thus, the test time for each wafer can be reduced.

20 In the flash-EEPROM having the structure as shown in FIGS. 57A and 57B, not only the value of voltage but also the time of application of voltage VEE can be set at optimal value. In addition, erase tests for the flash-EEPROMs in which the time of application of
25 voltage VEE is set at optimal value on a chip-by-chip basis can be performed simultaneously on the chips formed on the single wafer.

Furthermore, both the optimal voltage VEE and the optimal time of application of voltage VEE can be set for each chip, and erase tests for the flash-EEPROMs in which the voltage VEE and the time of application of voltage VEE are set at optimal values on a chip-by-chip basis can be performed simultaneously on the chips formed on the single wafer.

This multi-test is applicable not only to a flash-EEPROM product but also to a one-chip hybrid product in which the flash-EEPROM is integrated.

Additional advantages and modifications will readily occur to those skilled in the art. Therefore, the invention in its broader aspects is not limited to the specific details and representative embodiments, shown and described herein. Accordingly, various modifications may be made without departing from the spirit or scope of the general inventive concept as defined by the appended claims and their equivalents.

CLAIMS

1. A semiconductor integrated circuit device
having integrated circuits with different functions
integrated into one semiconductor chip, the semicon-
ductor integrated circuit device comprising:

a semiconductor chip;

a separating region, formed in the semiconductor
chip, for separating the semiconductor chip into a
plurality of integrated circuit formation regions, said
separating region being exposed to entire side faces of
the semiconductor chip; and

integrated circuits formed in the integrated
circuit formation regions, respectively, said integrat-
ed circuits having different functions, at least one
of the integrated circuits performing a function
fluctuating a potential of the integrated circuit
formation region in which said at least one of the
integrated circuits is formed.

2. The semiconductor integrated circuit device
according to claim 1, wherein said integrated circuits
include at least two of a non-volatile memory circuit,
an analog circuit, a digital circuit, a digital/
analog conversion circuit, a static memory circuit
and a dynamic memory circuit, and said at least one
of the integrated circuits which performs the function
fluctuating the potential of the integrated circuit
formation region includes at least one of

a non-volatile memory circuit and an analog circuit.

3. The semiconductor integrated circuit device according to claim 2, wherein said separating region is formed of a semiconductor substrate of a first conductivity type, and each of the integrated circuit formation regions is a first well of a second conductivity type formed in the substrate.

4. The semiconductor integrated circuit device according to claim 3, wherein a second well of the first conductivity type, which is supplied with a negative potential, is formed in said first well, and at least one of an input/output circuit and an interface circuit is formed in the second well.

5. A semiconductor integrated circuit device having integrated circuits with different functions integrated into one semiconductor chip, the semiconductor integrated circuit device comprising:

a semiconductor chip;

a separating region, formed in the semiconductor chip, for separating the semiconductor chip into a plurality of integrated circuit formation regions, said separating region being exposed to entire side faces of the semiconductor chip; and

integrated circuits formed in the integrated circuit formation regions, respectively, said integrated circuits having dedicated power supplies.

6. The semiconductor integrated circuit device

according to claim 5, wherein said integrated circuits include at least two of a non-volatile memory circuit, an analog circuit, a digital circuit, a digital/analog conversion circuit, a static memory circuit and
5 a dynamic memory circuit.

7. The semiconductor integrated circuit device according to claim 6, wherein said separating region is formed of a semiconductor substrate of a first conductivity type, and each of the integrated circuit
10 formation regions is a first well of a second conductivity type formed in the substrate.

8. The semiconductor integrated circuit device according to claim 7, wherein a second well of the first conductivity type, which is supplied with a
15 negative potential, is formed in said first well, and at least one of an input/output circuit and an interface circuit is formed in the second well.

9. A method of testing a semiconductor integrated circuit device comprising a semiconductor chip; a
20 separating region, formed in the semiconductor chip, for separating the semiconductor chip into a plurality of integrated circuit formation regions, said separating region being exposed to entire peripheral side faces of the semiconductor chip; and integrated
25 circuits formed in the integrated circuit formation regions, respectively, said integrated circuits having dedicated power supplies,

wherein while at least one of the integrated circuits is being tested, power is supplied to only the integrated circuit being tested, and no power is supplied to the other integrated circuits.

5 10. The method of testing the semiconductor integrated circuit device, according to claim 9, wherein said integrated circuit includes at least one of a non-volatile memory circuit and a dynamic memory circuit, and at least one of an analog circuit, a
10 digital circuit and a digital/analog conversion circuit, and

 while a test is being conducted to specify a defective row and a defective column in said at least one of the non-volatile memory circuit and the dynamic
15 memory circuit, no power is supplied to the other integrated circuits.

 11. A semiconductor integrated circuit comprising device:

 a semiconductor substrate of a first conductivity
20 type;

 at least one first well of a second conductivity type, formed in the semiconductor substrate;

 an integrated circuit formed in the first well;

 a power supply system including a high-potential
25 power line and a low-potential power line for supplying an operational voltage to the integrated circuit;

 a bias system for supplying a bias potential to

the semiconductor substrate, the bias system including a bias line separated from the high-potential power line and the low-potential power line;

a first pad connected to the bias line;

5 a second pad connected to the high-potential power line; and

a third pad connected to the low-potential power line.

10 12. The semiconductor integrated circuit device according to claim 11, wherein when the integrated circuit is tested, the operational voltage and the bias potential are supplied independently.

15 13. The semiconductor integrated circuit device according to claim 12, wherein in the state in which a plurality of semiconductor chips each composed of the integrated circuit are formed on a semiconductor wafer, the integrated circuits of the semiconductor chips are tested at the same time.

20 14. The semiconductor integrated circuit device according to claim 11, further comprising an external lead connected to the first pad and one of the second and third pads.

25 15. The semiconductor integrated circuit device according to claim 11, wherein a second well of the first conductivity type is formed in the first well, and a bias potential supplied to the second well is equal to a bias potential supplied to the semiconductor

substrate.

16. The semiconductor integrated circuit device according to claim 11, wherein said semiconductor substrate constitutes a semiconductor wafer.

5 17. The semiconductor integrated circuit device according to claim 11, wherein there are provided at least two of said first wells, at least two of said integrated circuits with different functions are formed in at least two of said first wells, and a semiconductor device system constituted by connecting the
10 integrated circuits with the different functions is integrated in the semiconductor substrate.

18. The semiconductor integrated circuit device according to claim 17, wherein said integrated circuits
15 with the different functions are selected from a group consisting of a processor, a dynamic RAM, a static RAM, an EEPROM, a D/A converter, an analog circuit and a logic circuit.

19. A tester for a semiconductor integrated
20 circuit, the tester comprising:

 a supply voltage generator, associated with a plurality of semiconductor integrated circuit device chips to be tested at a time, for generating a supply voltage for operating integrated circuits on each
25 semiconductor integrated circuit device chip;

 a detector for detecting a variation in supply voltage for each semiconductor integrated circuit

device chip, while the semiconductor integrated circuit device chips are being tested;

5 a judgement circuit device for determining whether the variation in supply voltage detected for each chip falls within a predetermined range of allowance; and

10 a switch control circuit and driver circuit for shutting off, when it has been determined that the variation in supply voltage detected for each chip falls outside the predetermined range of allowance, the supply of the supply voltage to the chip with the variation in supply voltage outside the predetermined range of allowance.

ABSTRACT OF THE DISCLOSURE

Functional circuits such as a processor, an SRAM,
a DRAM and a flash-EEPROM are mounted on a semicon-
ductor chip. Of these functional circuits, for
5 example, the flash-EEPROM which fluctuates a potential
of the semiconductor chip is separated from the other
circuits by means of a separating region provided in
the semiconductor chip. In addition, the separating
region is put in contact with the entire side faces of
10 the semiconductor chip.

SECRET

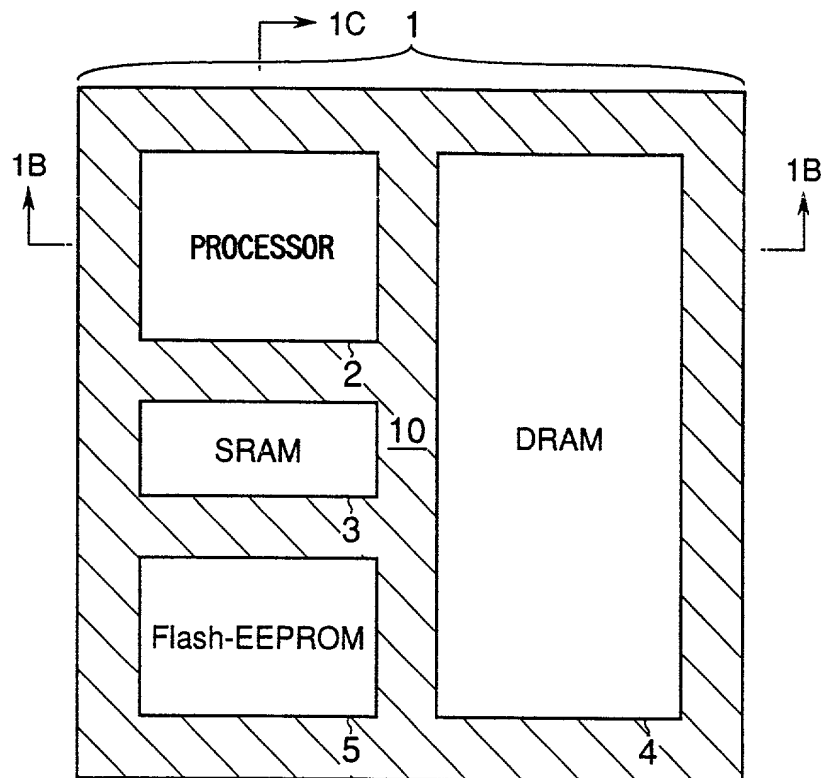


FIG. 1A

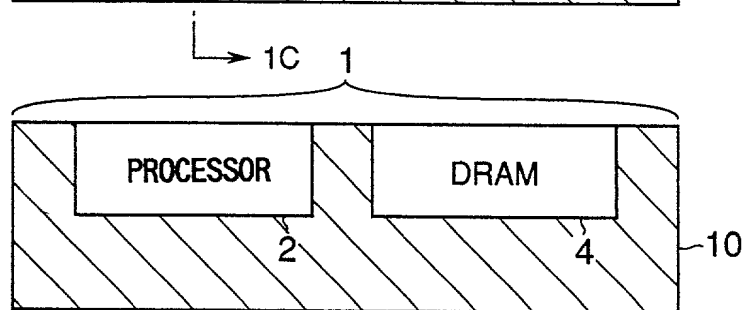


FIG. 1B

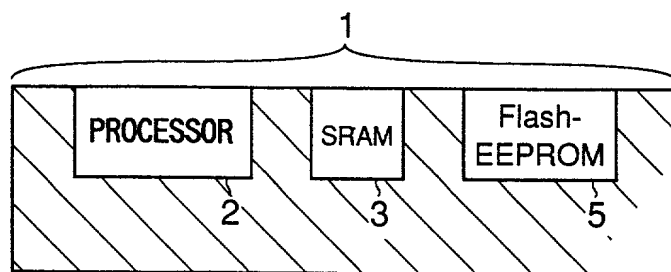


FIG. 1C

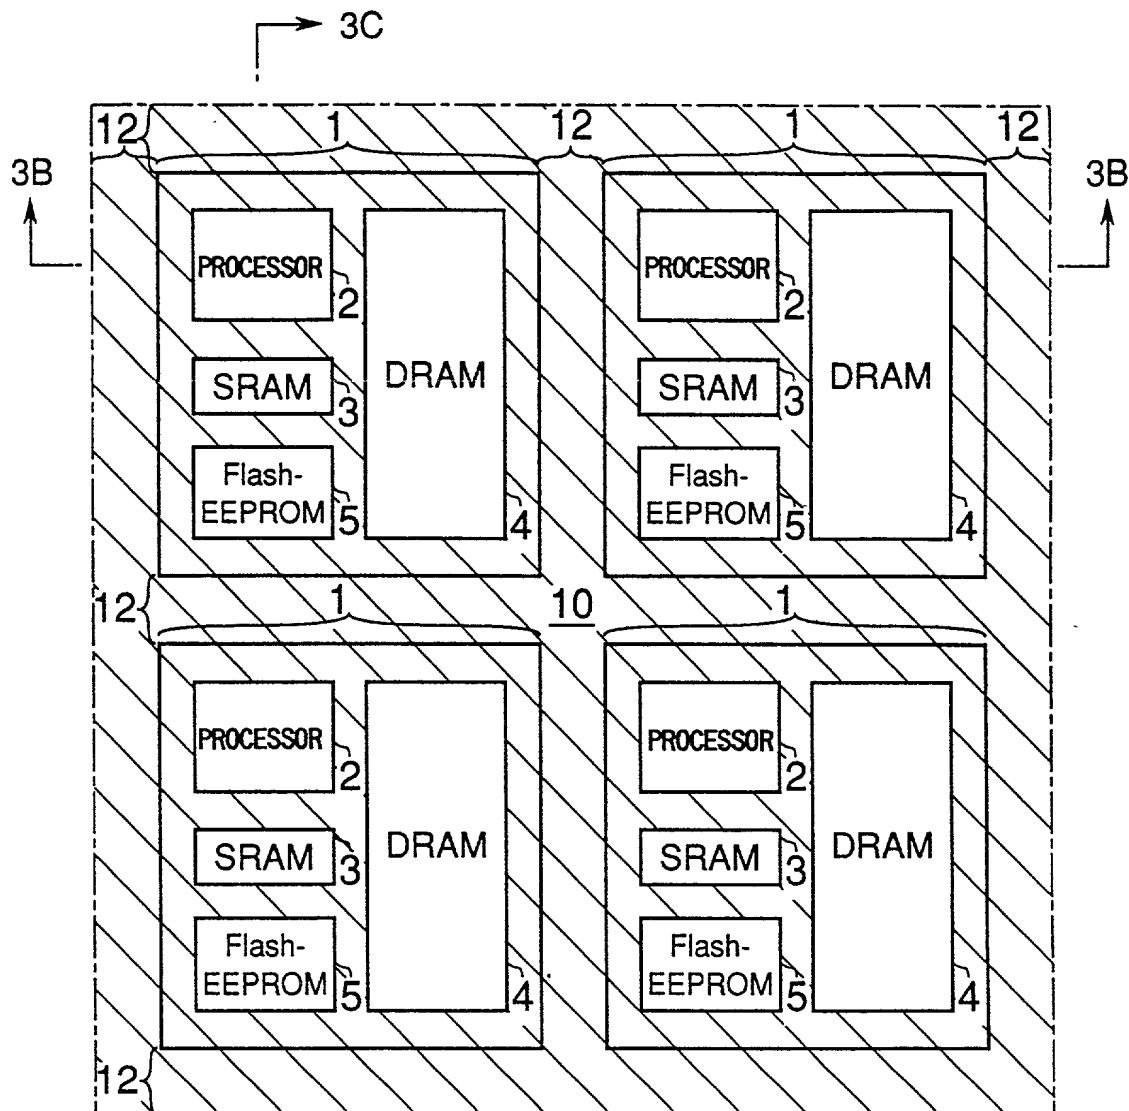


FIG. 3A

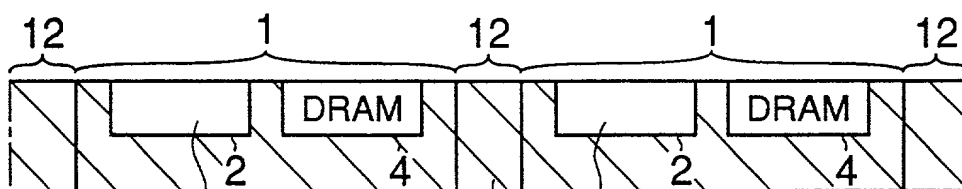


FIG. 3B

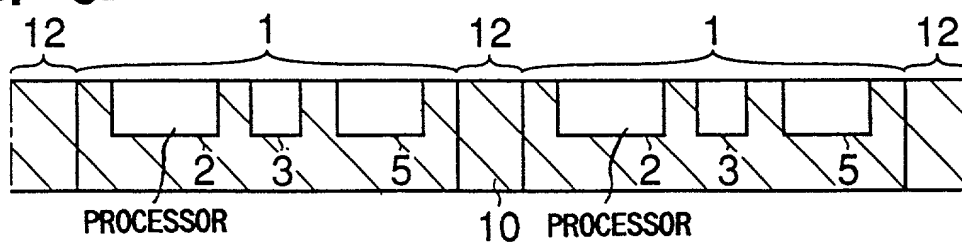


FIG. 3C

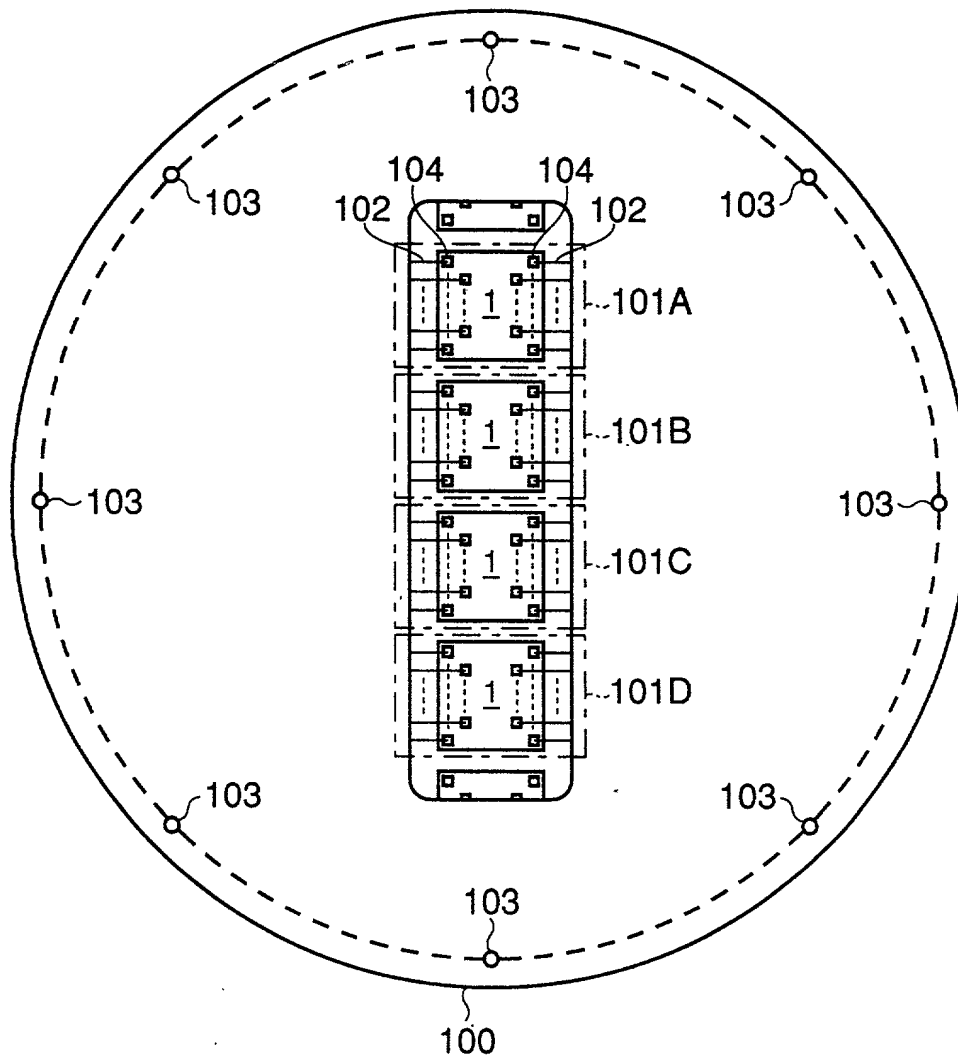


FIG. 4

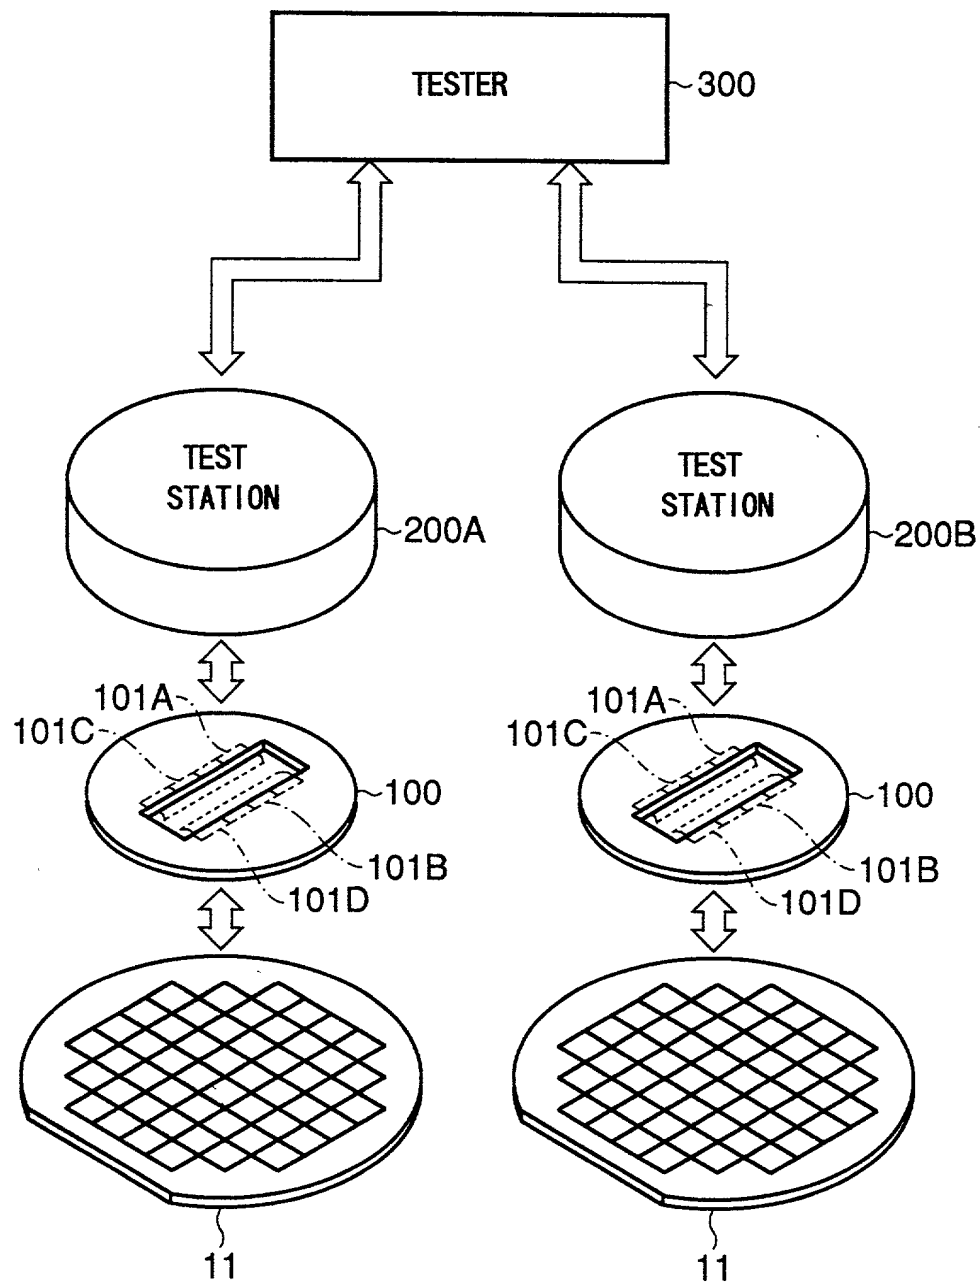


FIG. 5

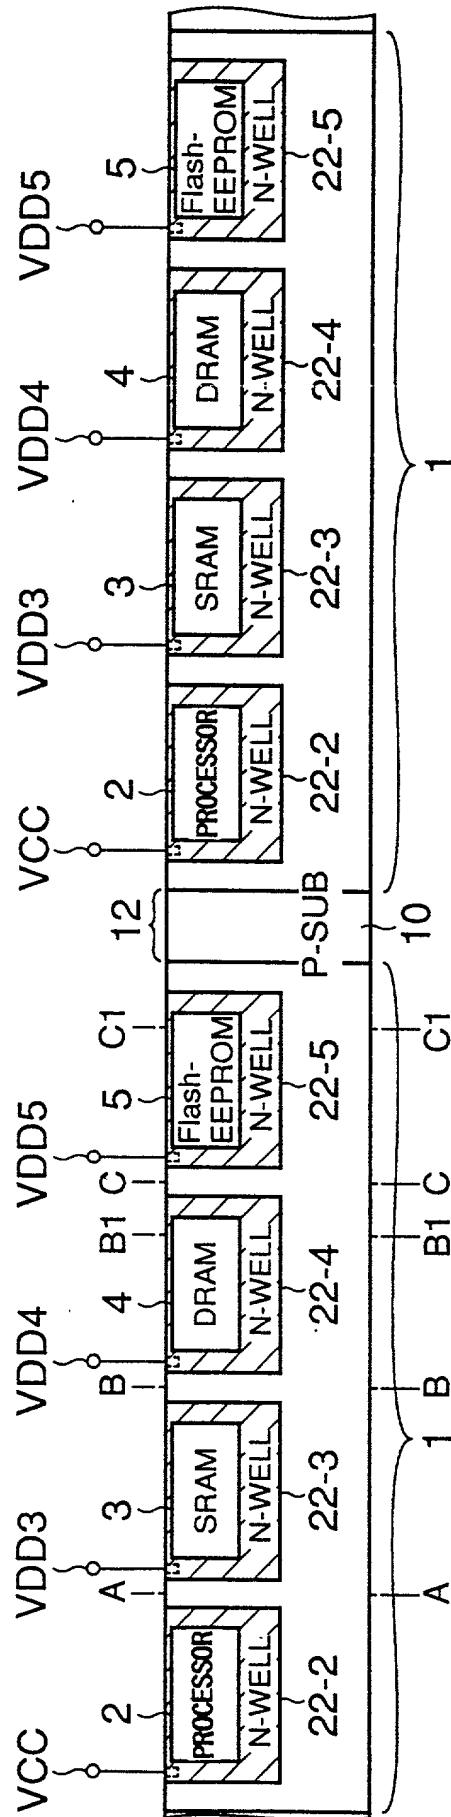


FIG. 6

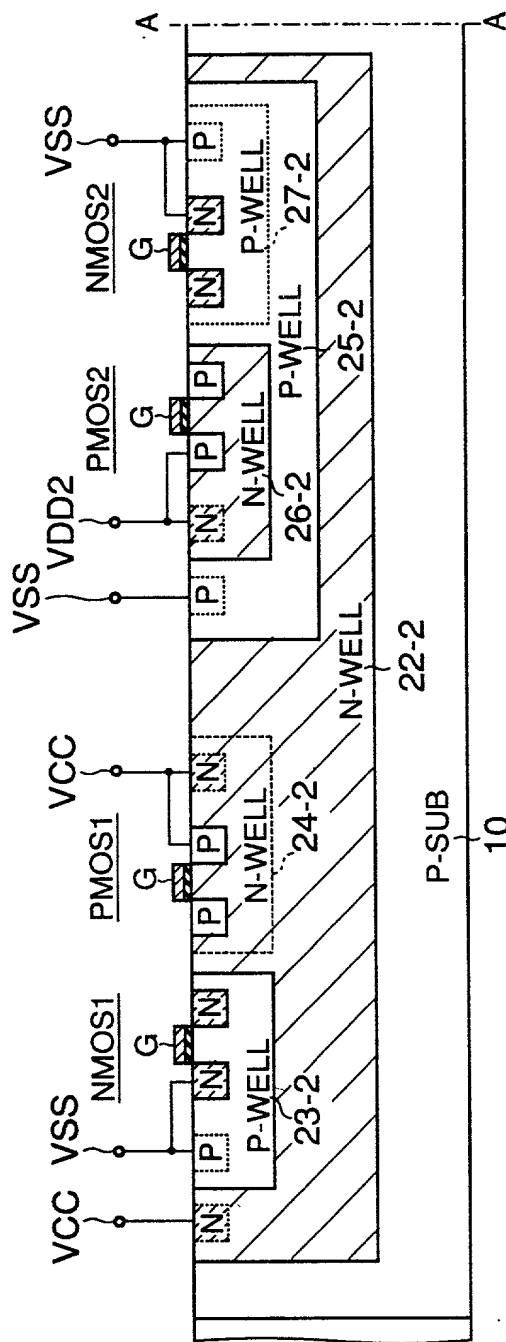


FIG. 7

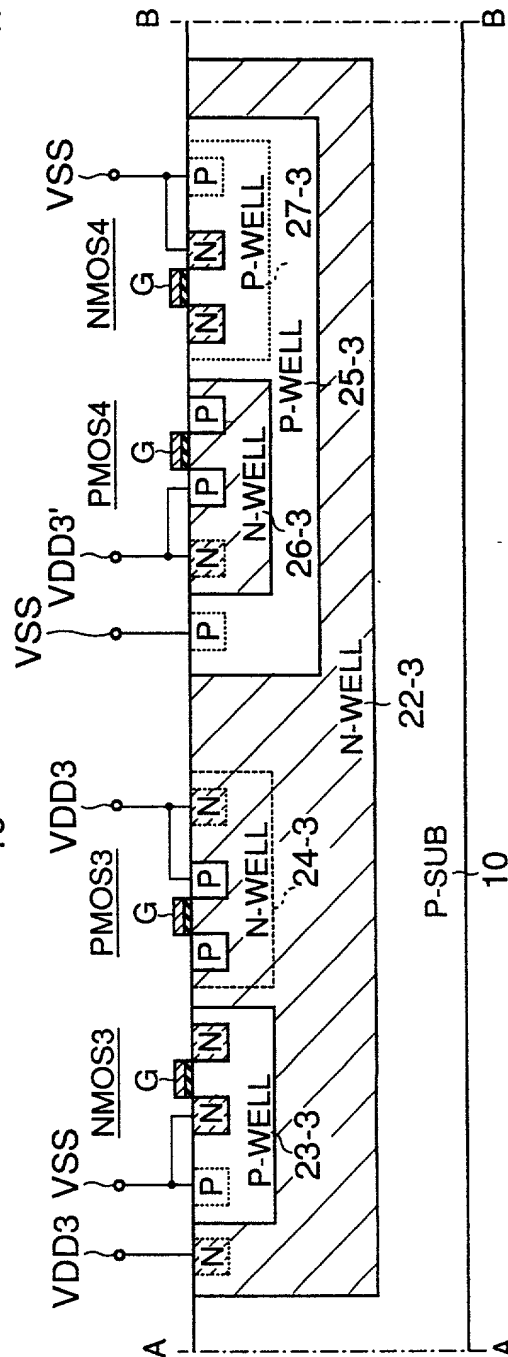


FIG. 8

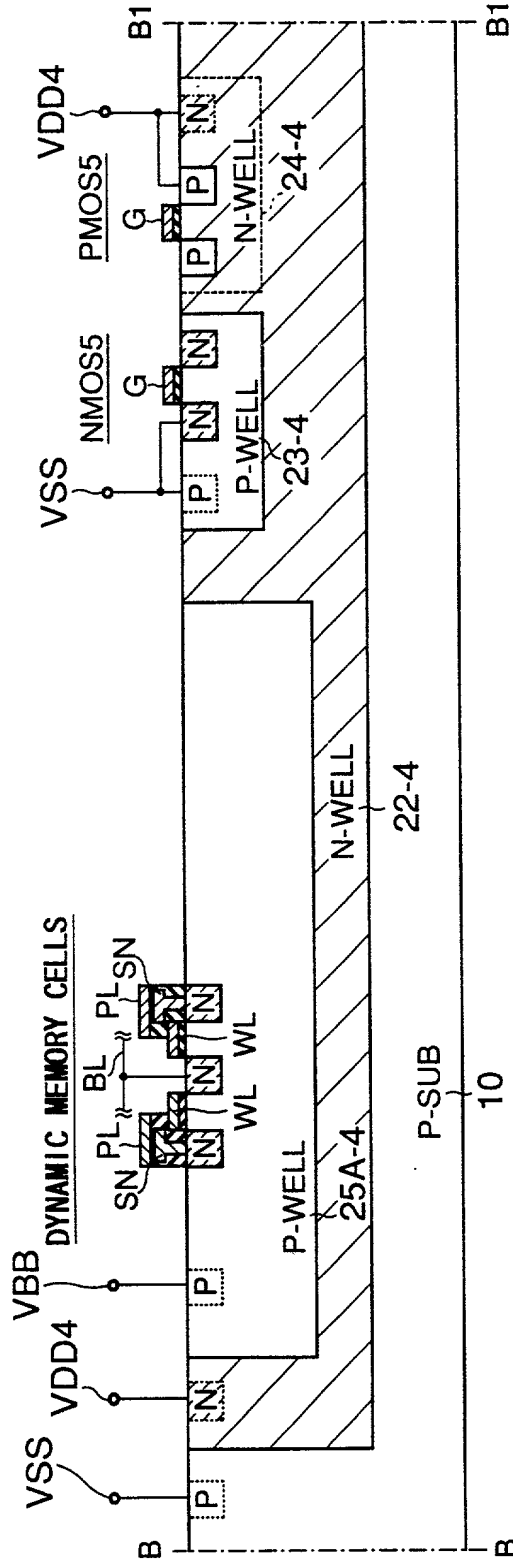


FIG. 9A

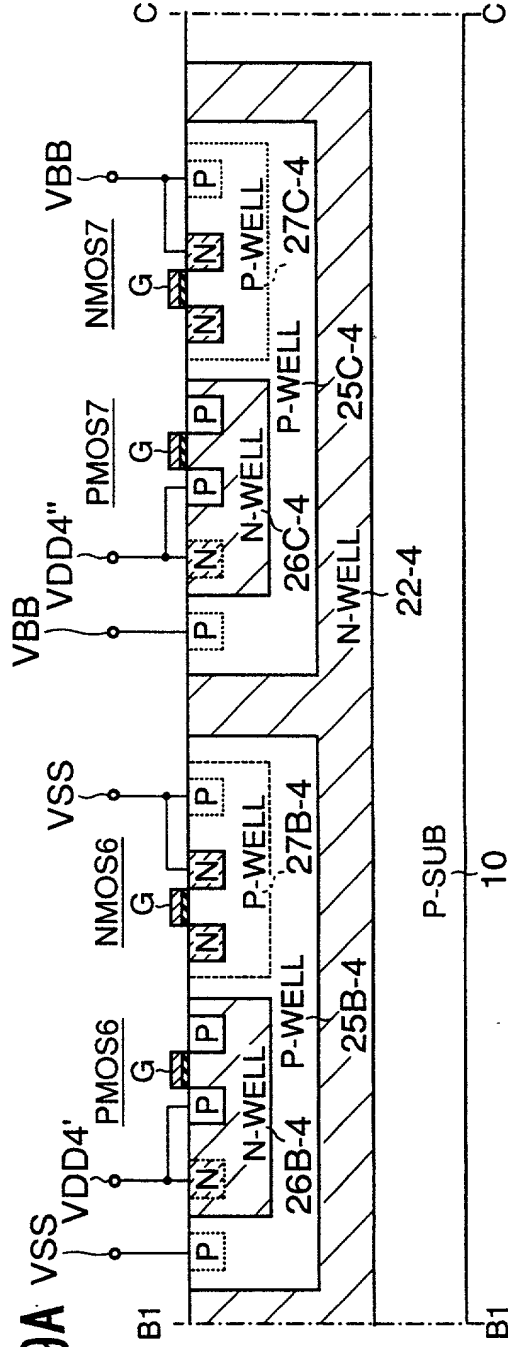


FIG. 9B



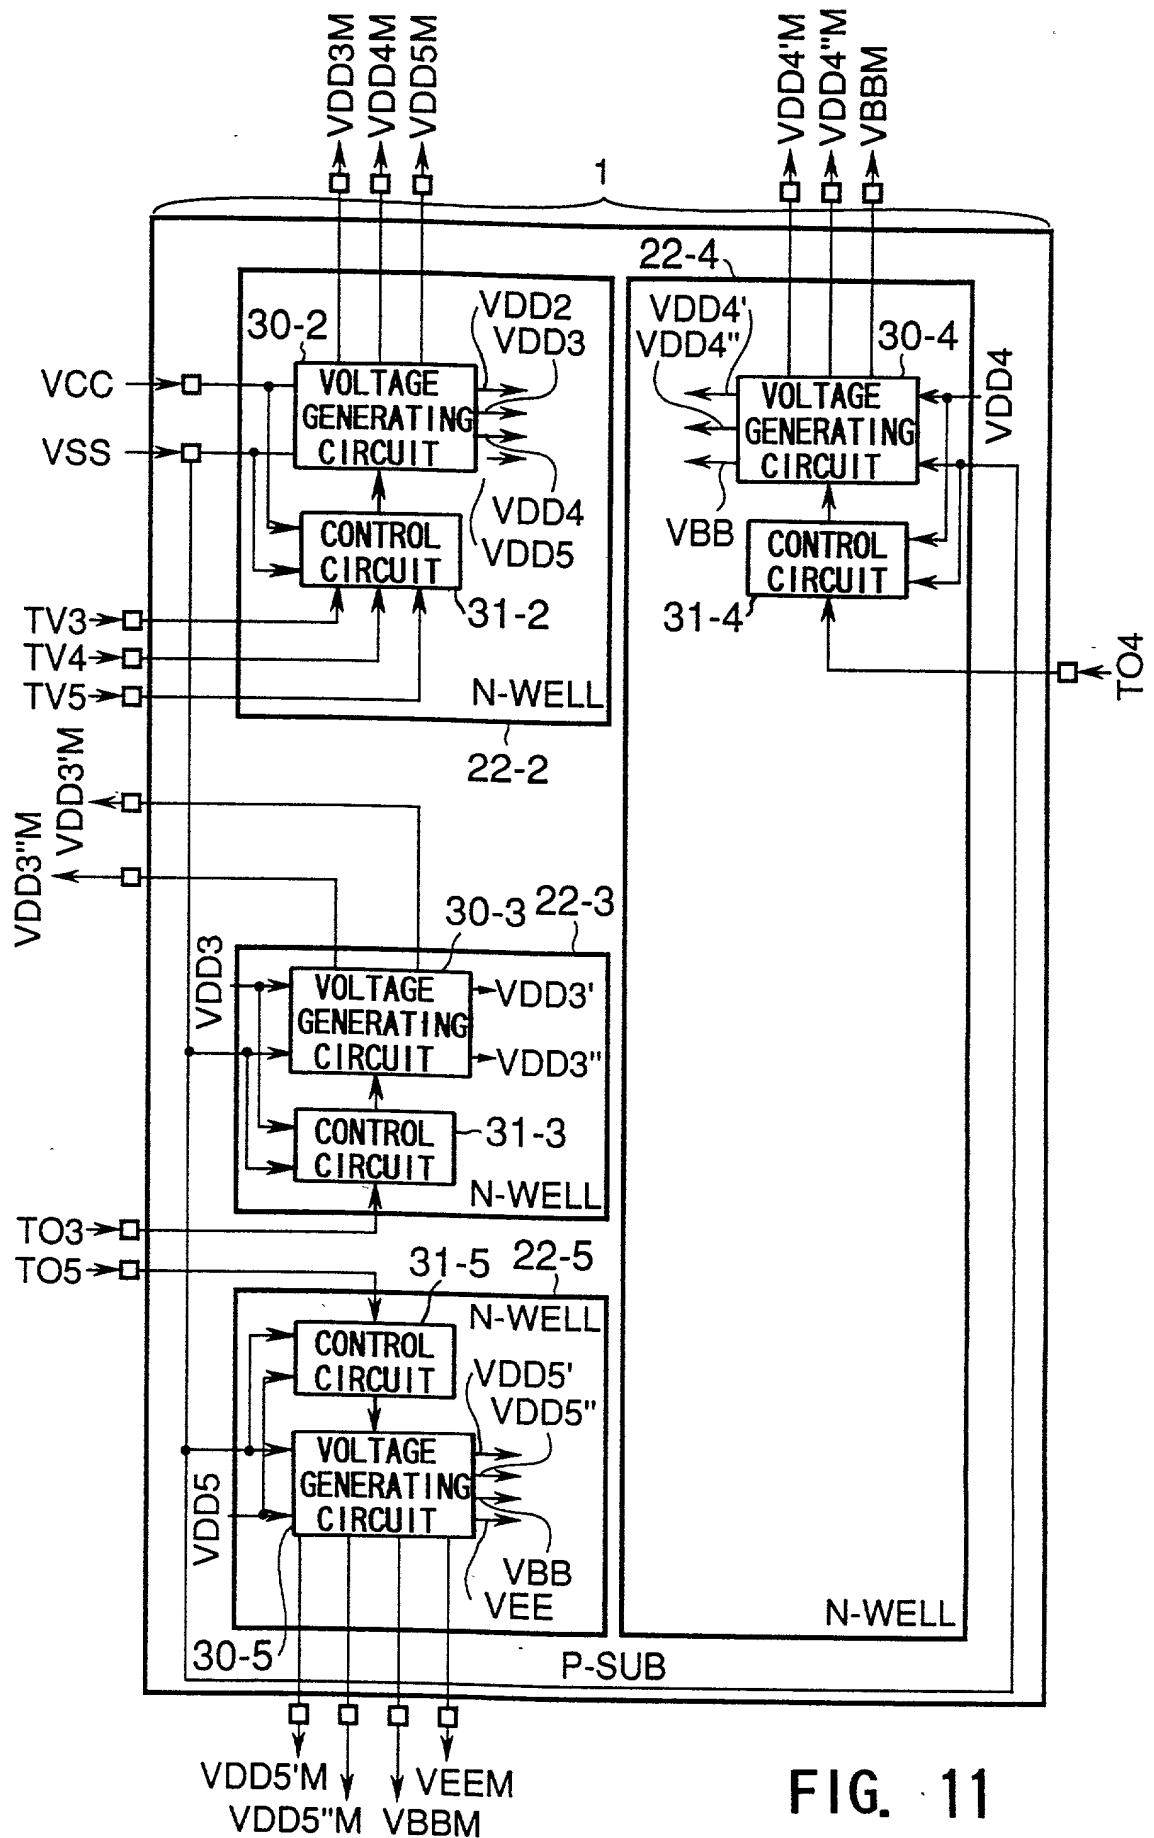


FIG. 11

FIG. 12A

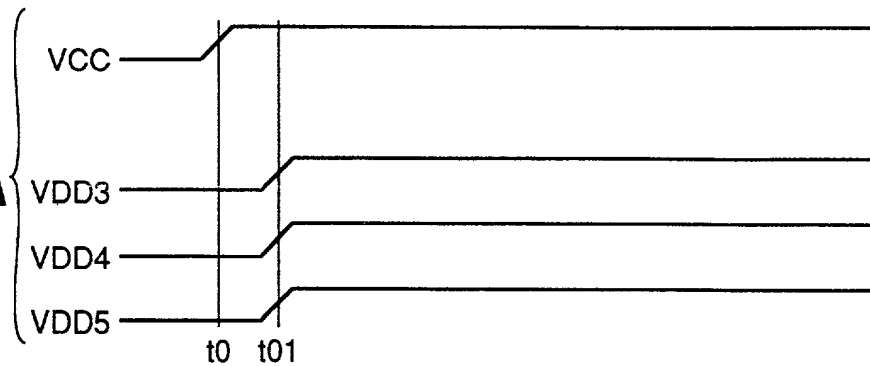


FIG. 12B

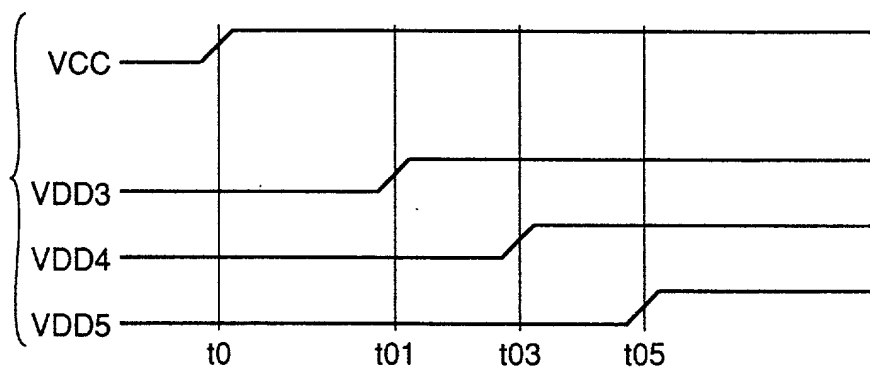
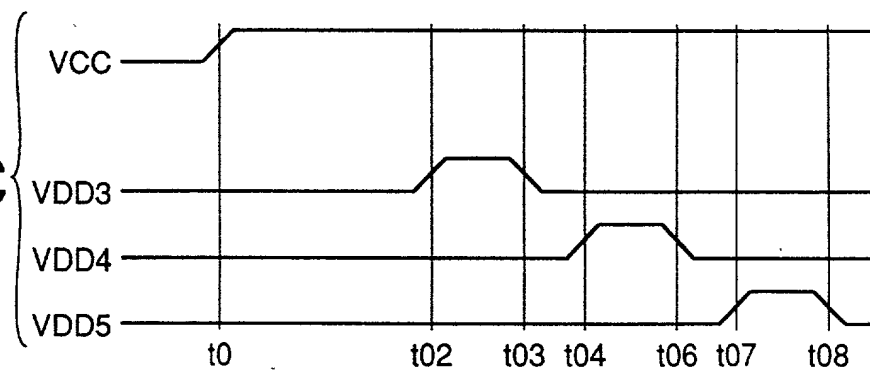


FIG. 12C



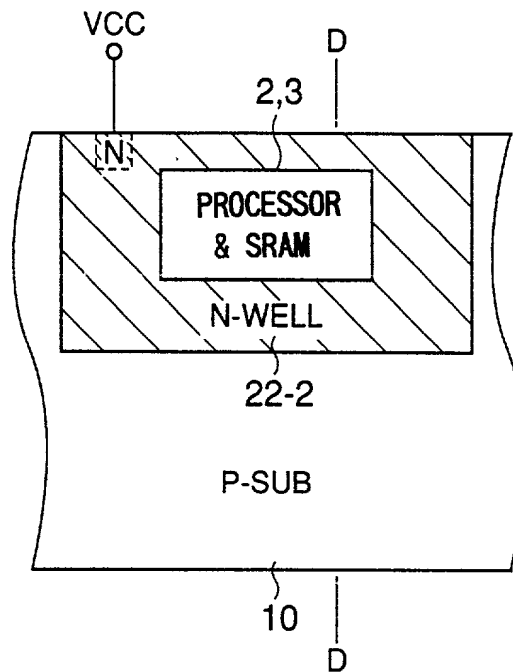


FIG. 13

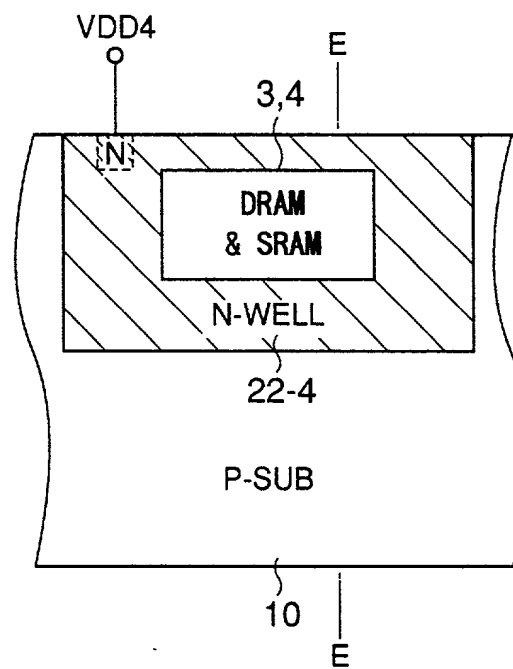


FIG. 15

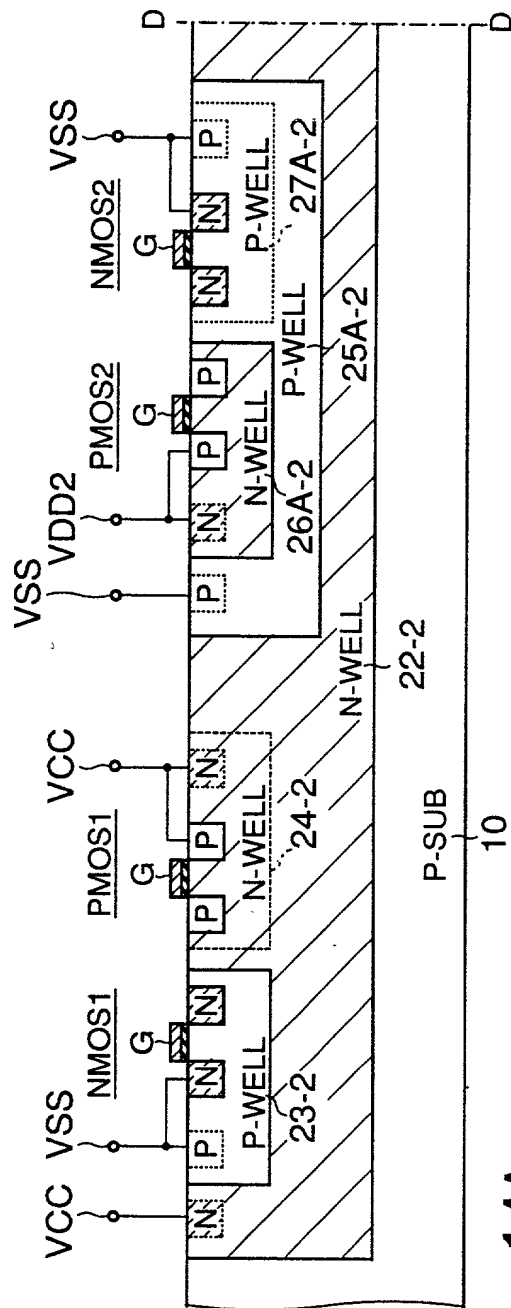


FIG. 14A

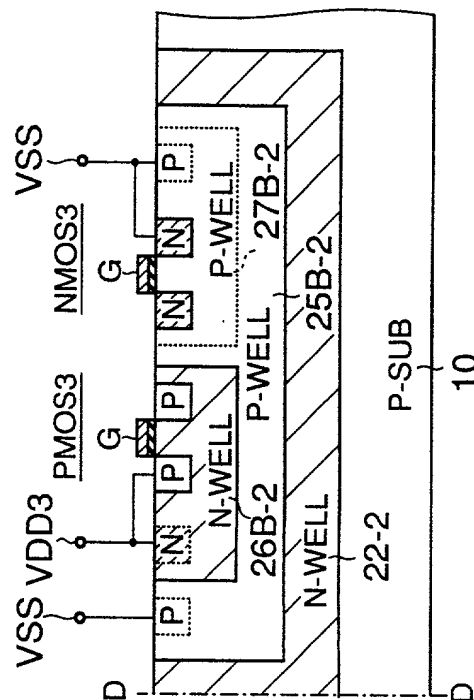


FIG. 14B

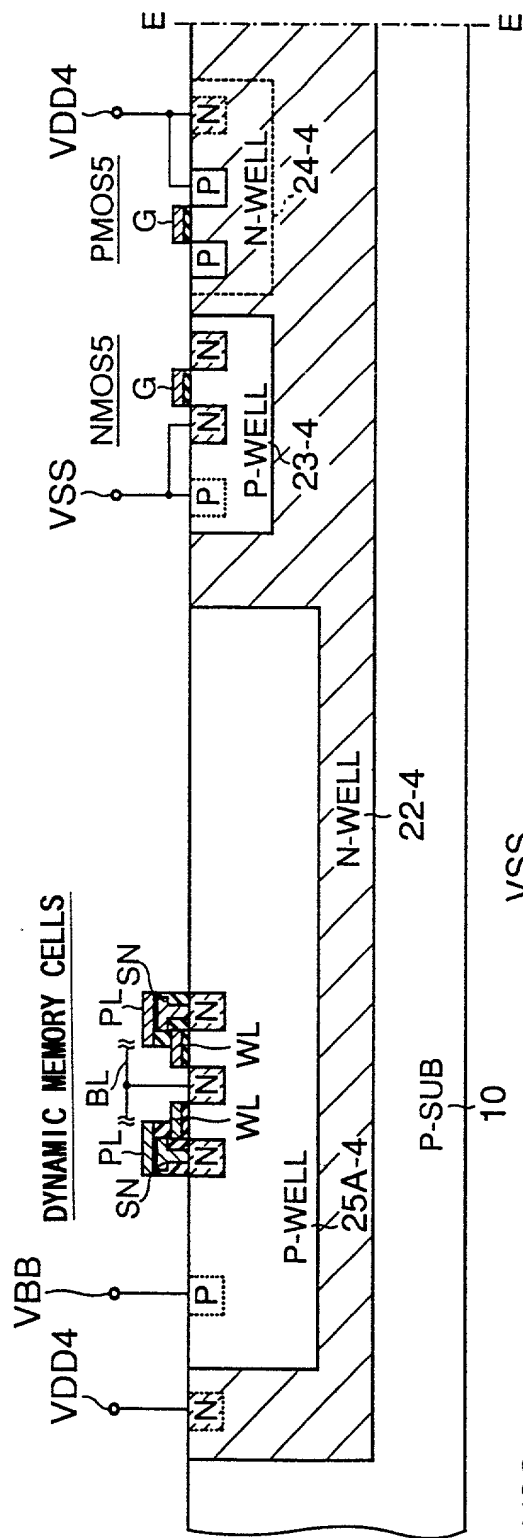
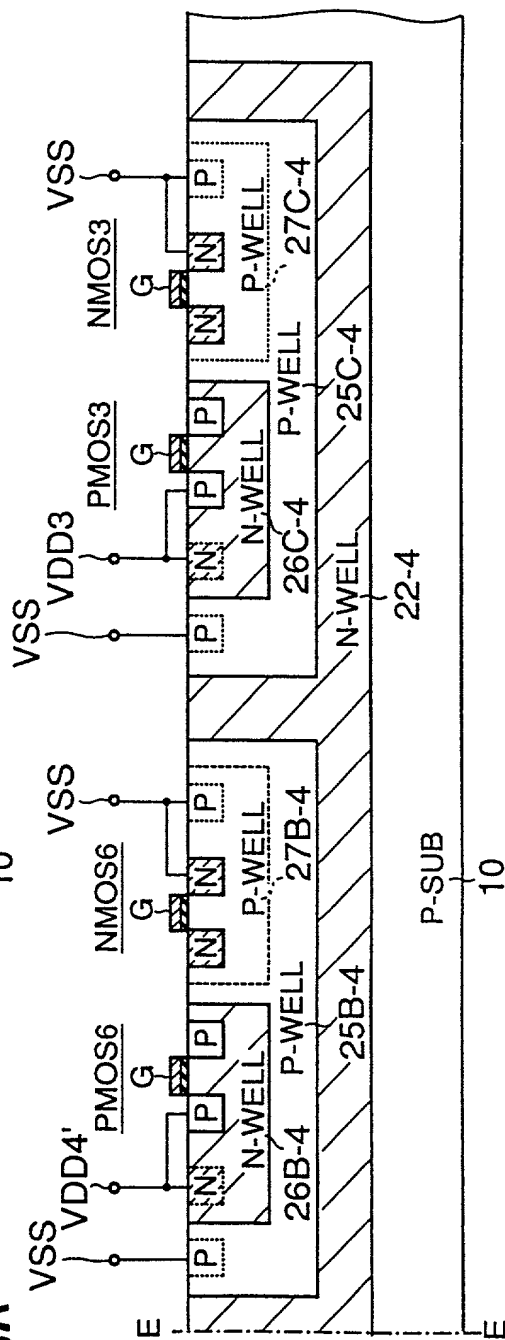


FIG. 16A



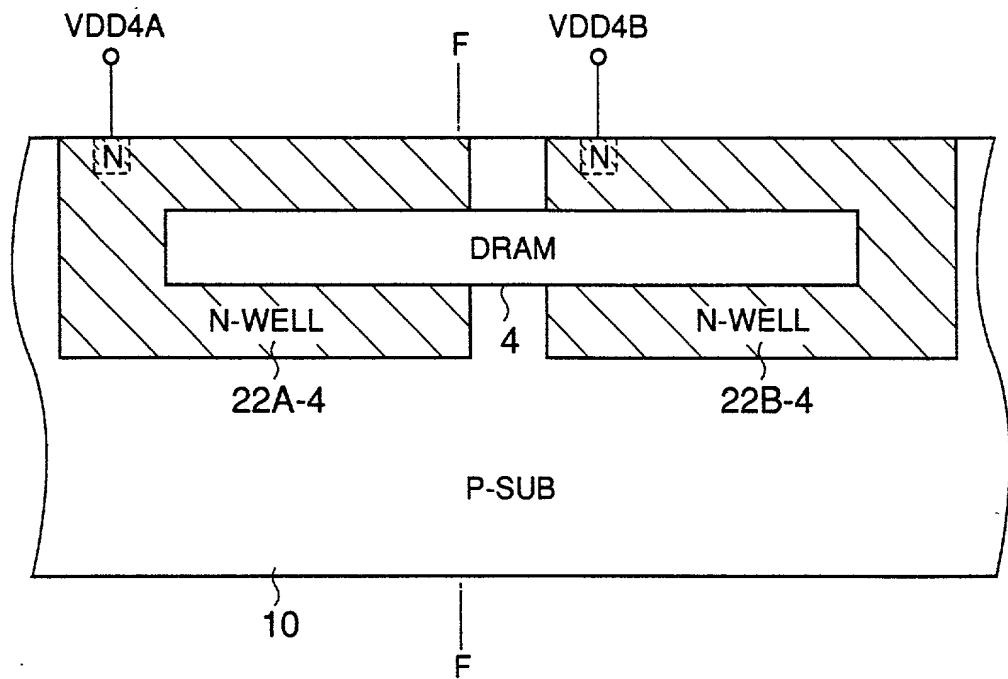


FIG. 17

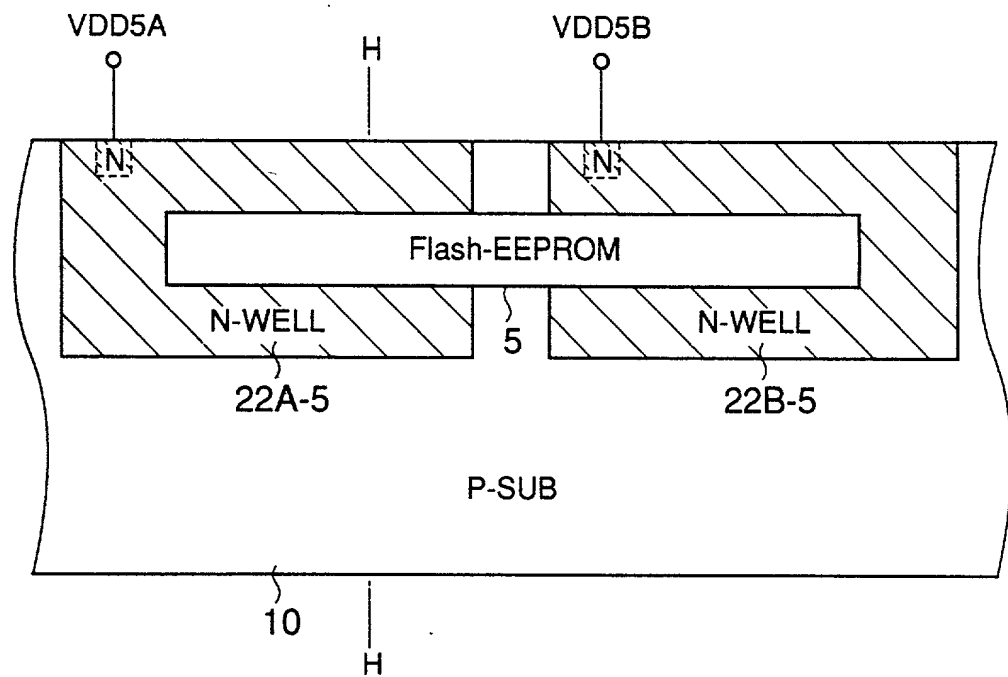


FIG. 19

FIG. 21A

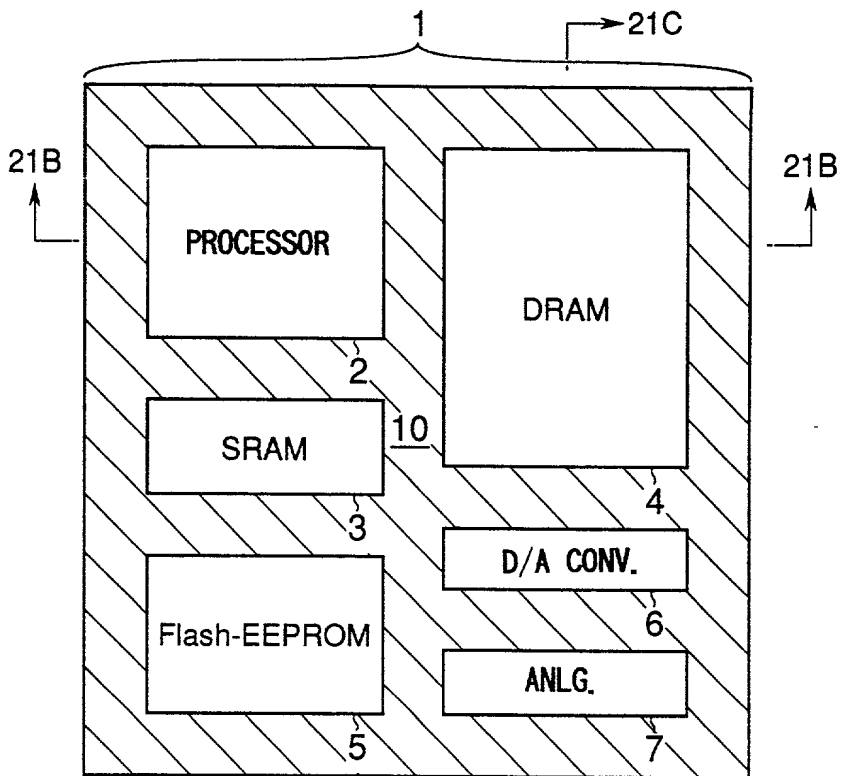


FIG. 21B

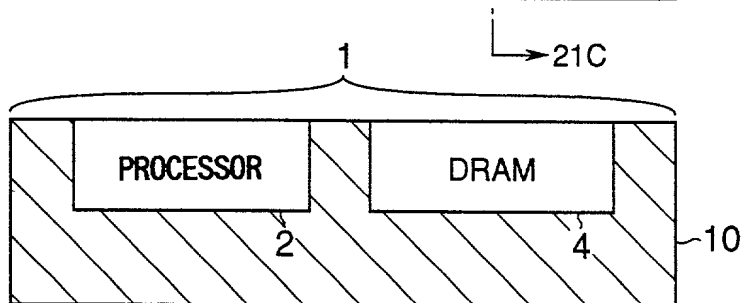
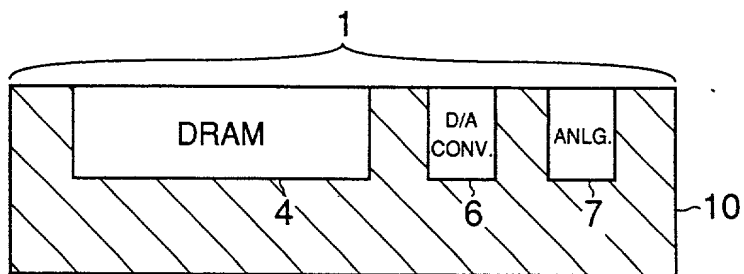


FIG. 21C



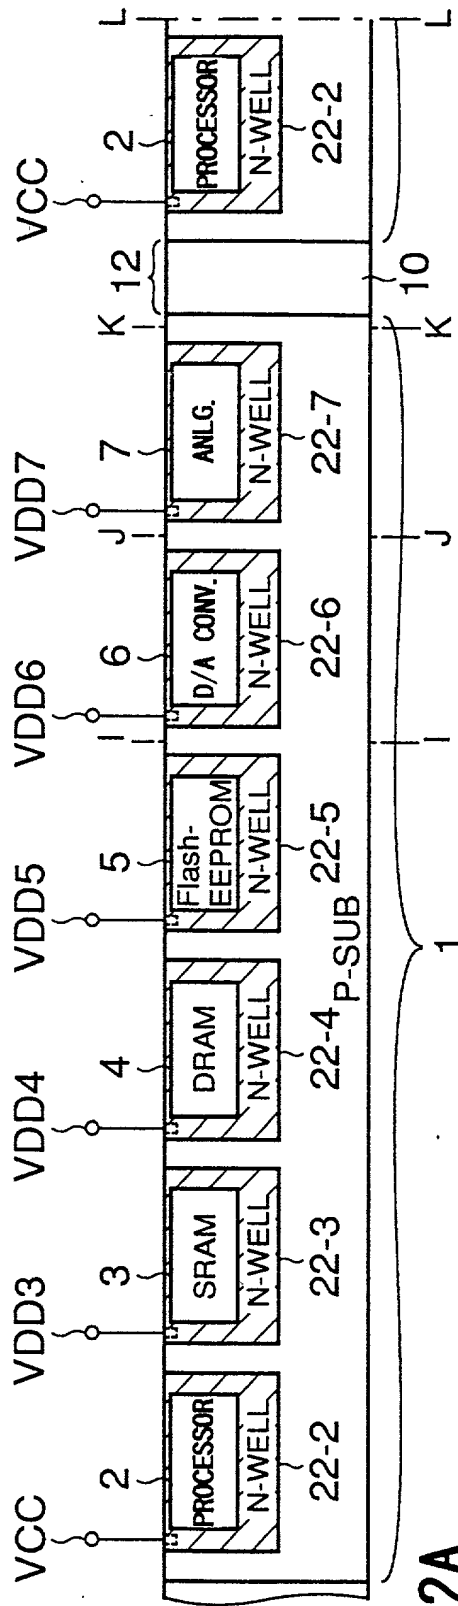


FIG. 22A

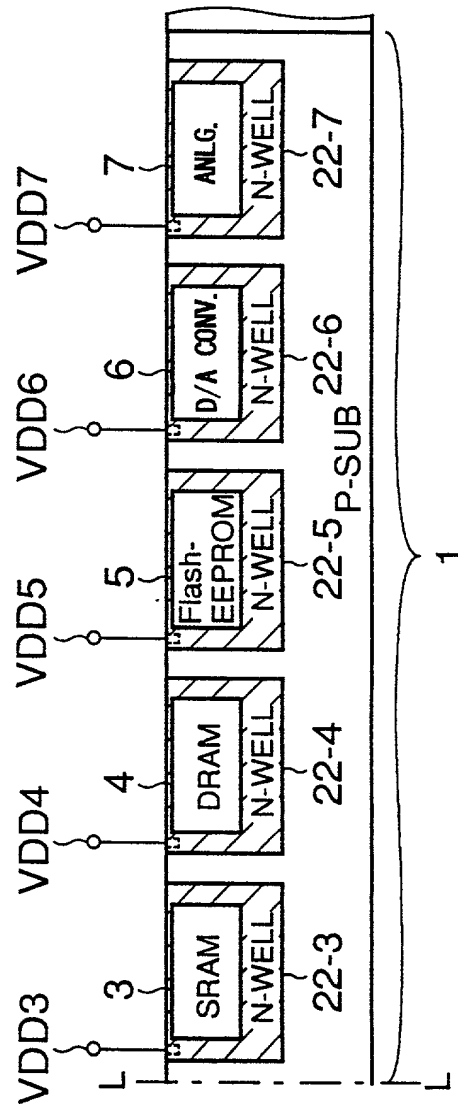


FIG. 22B

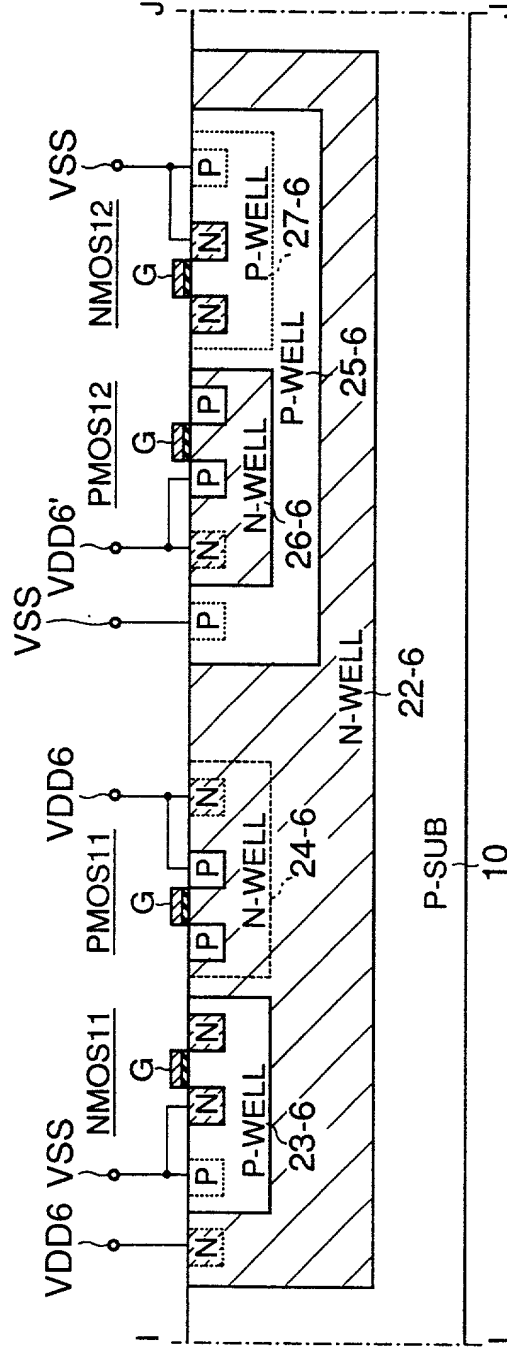


FIG. 23

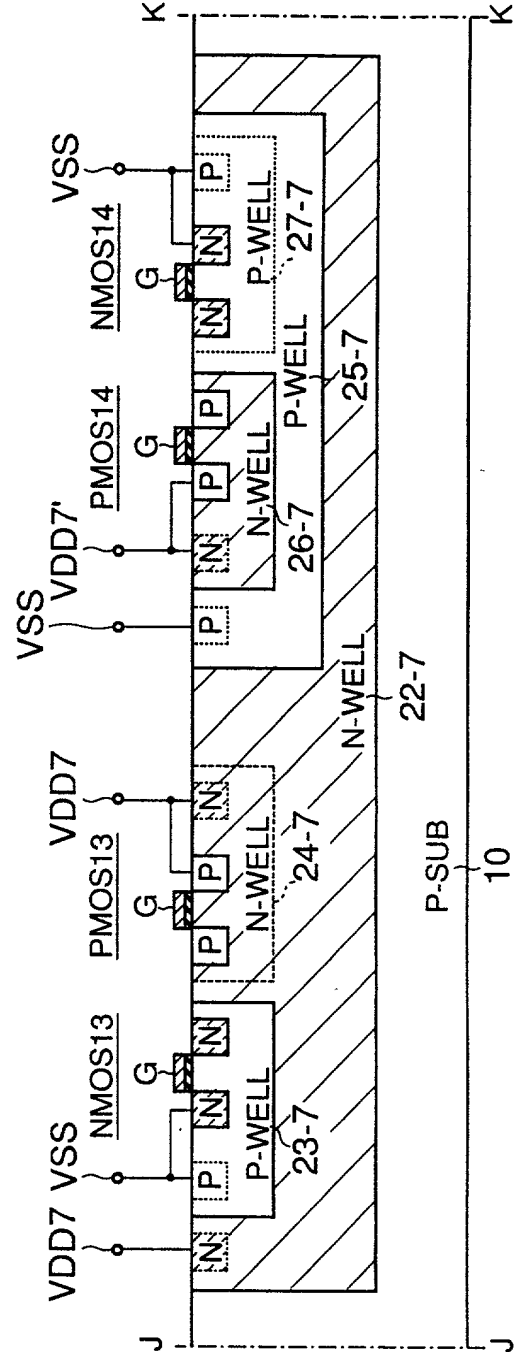
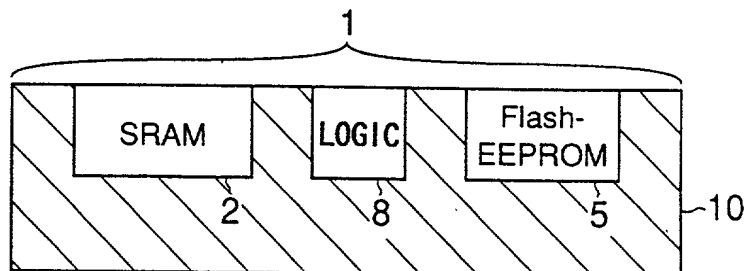


FIG. 24



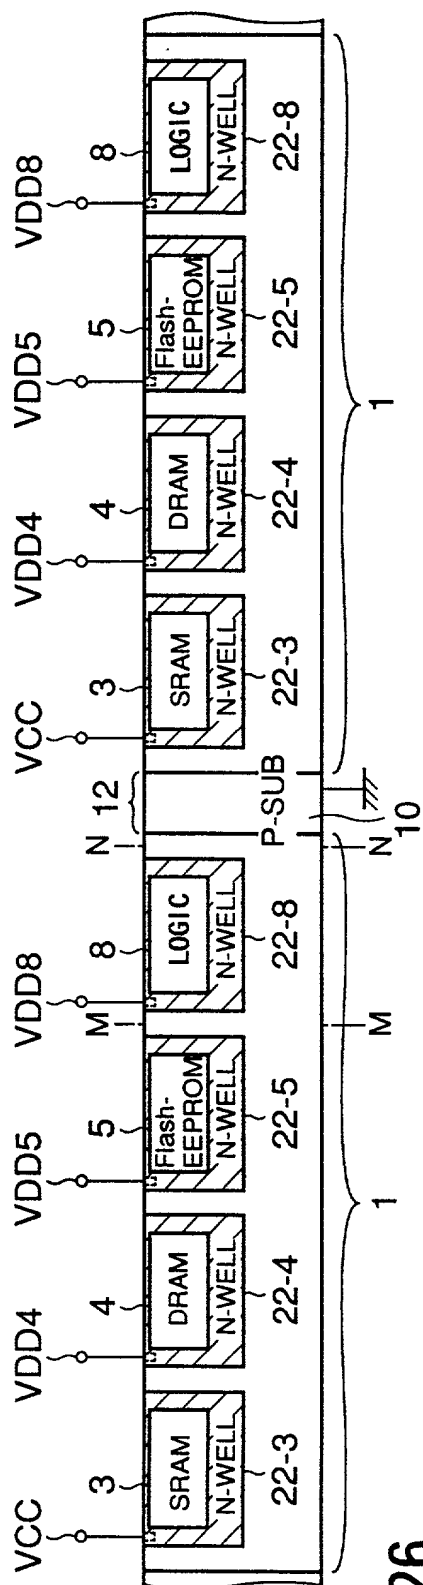


FIG. 26

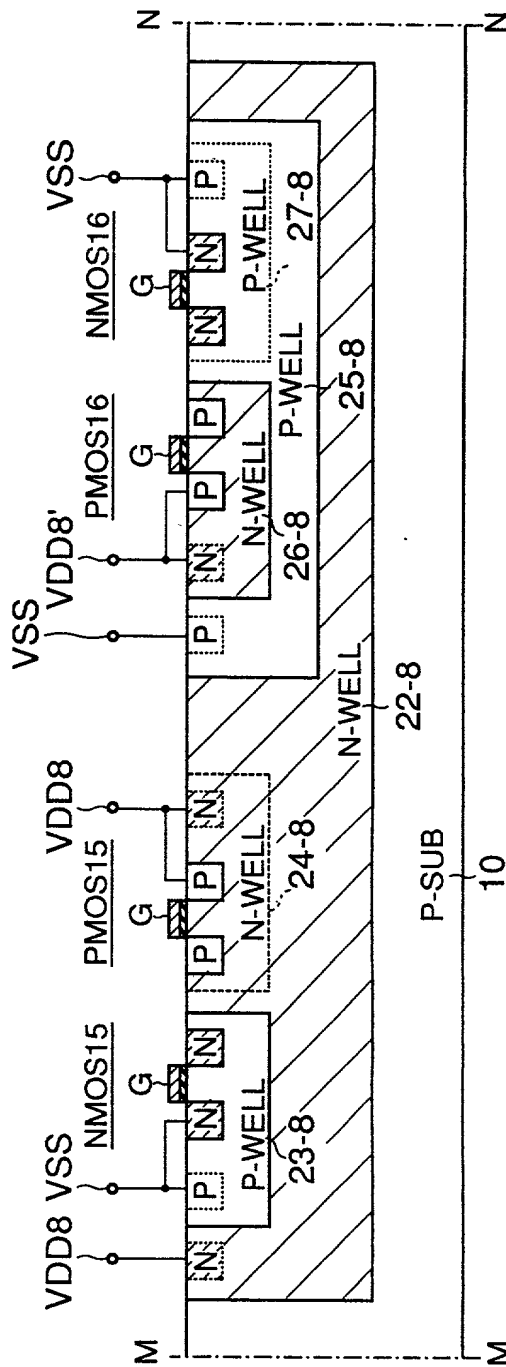


FIG. 27

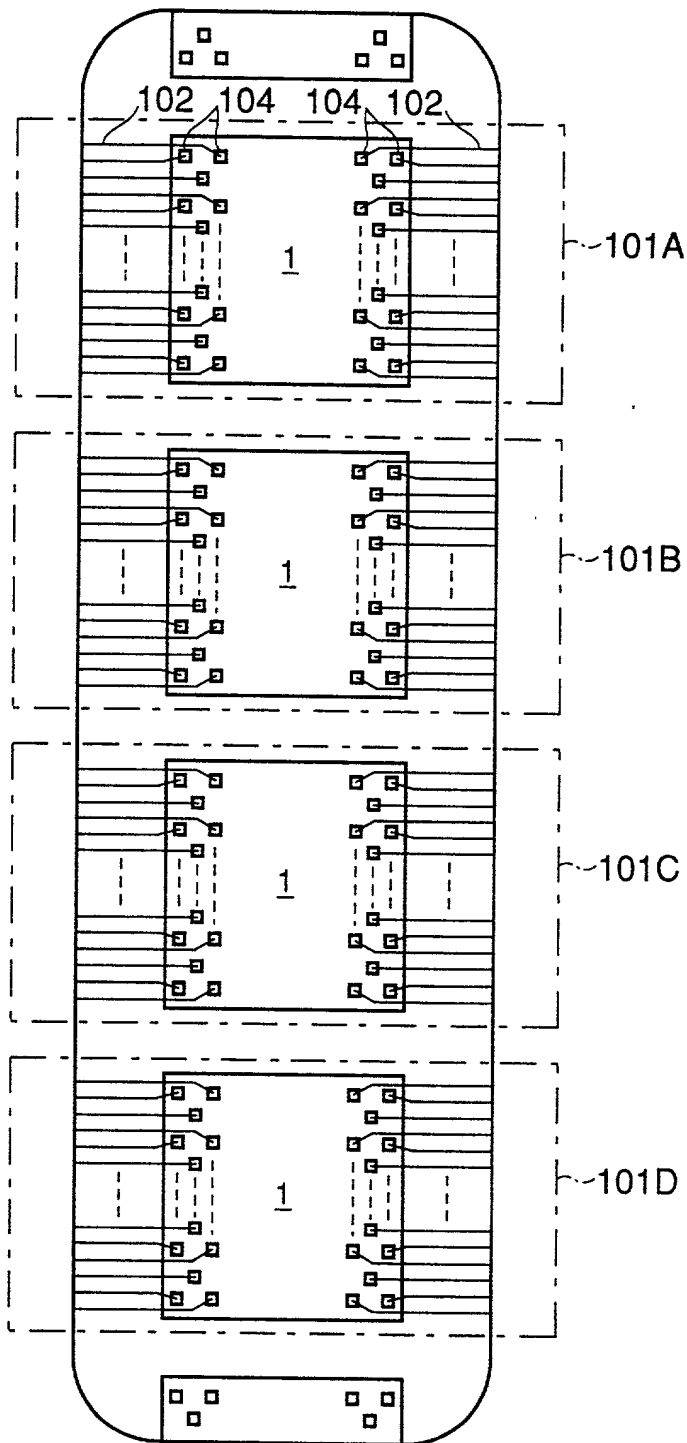


FIG. 28

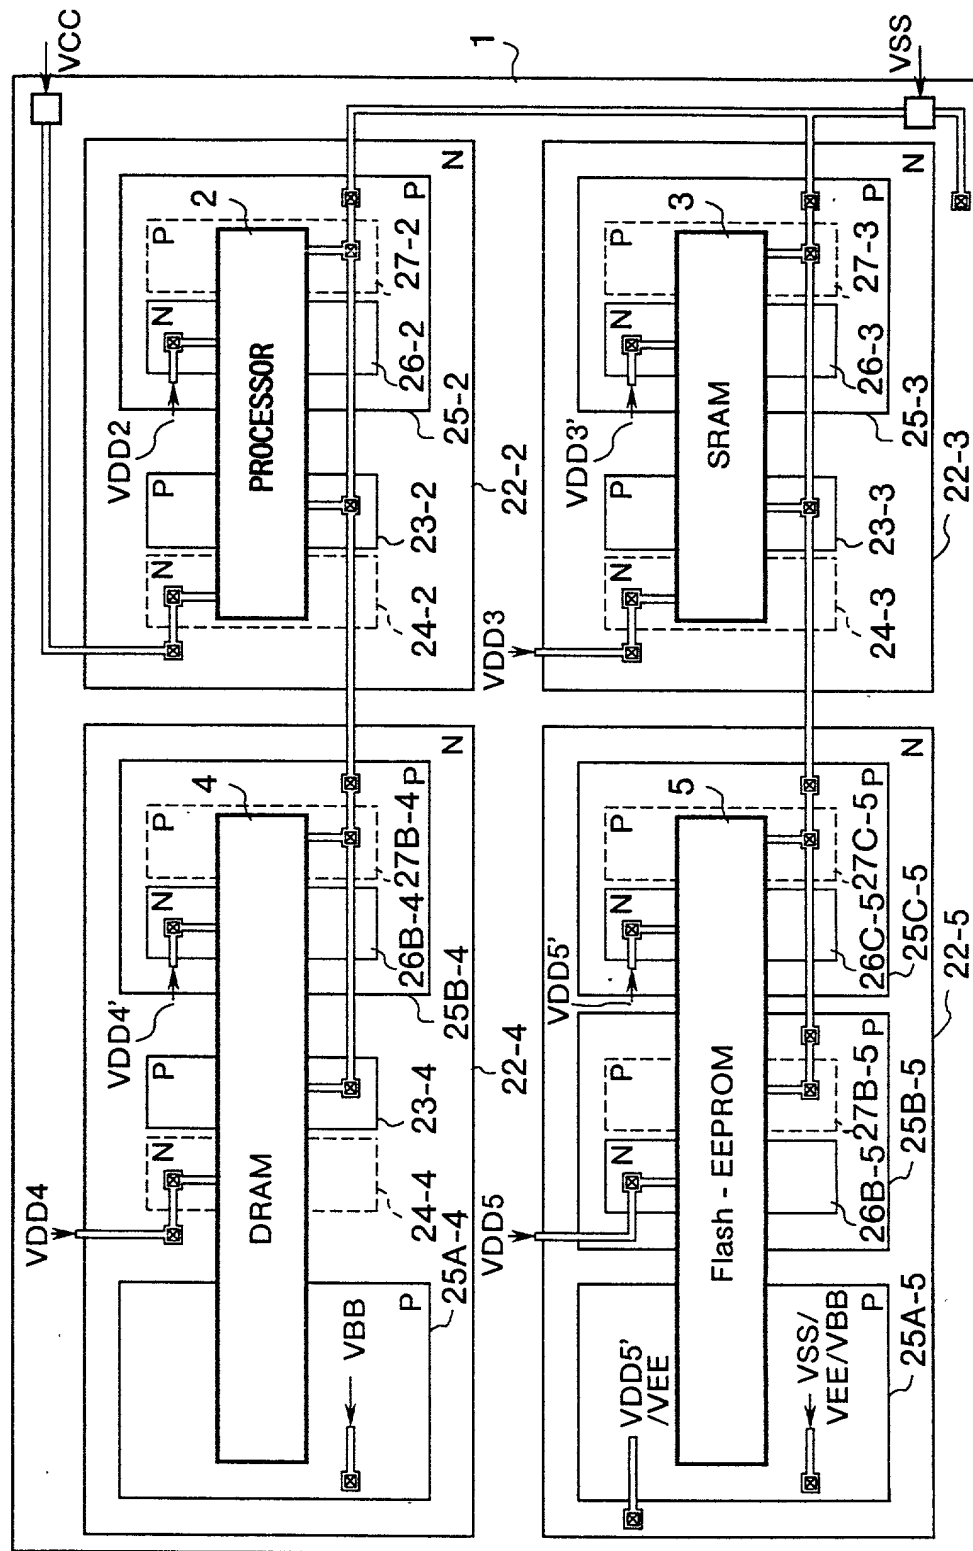


FIG. 29

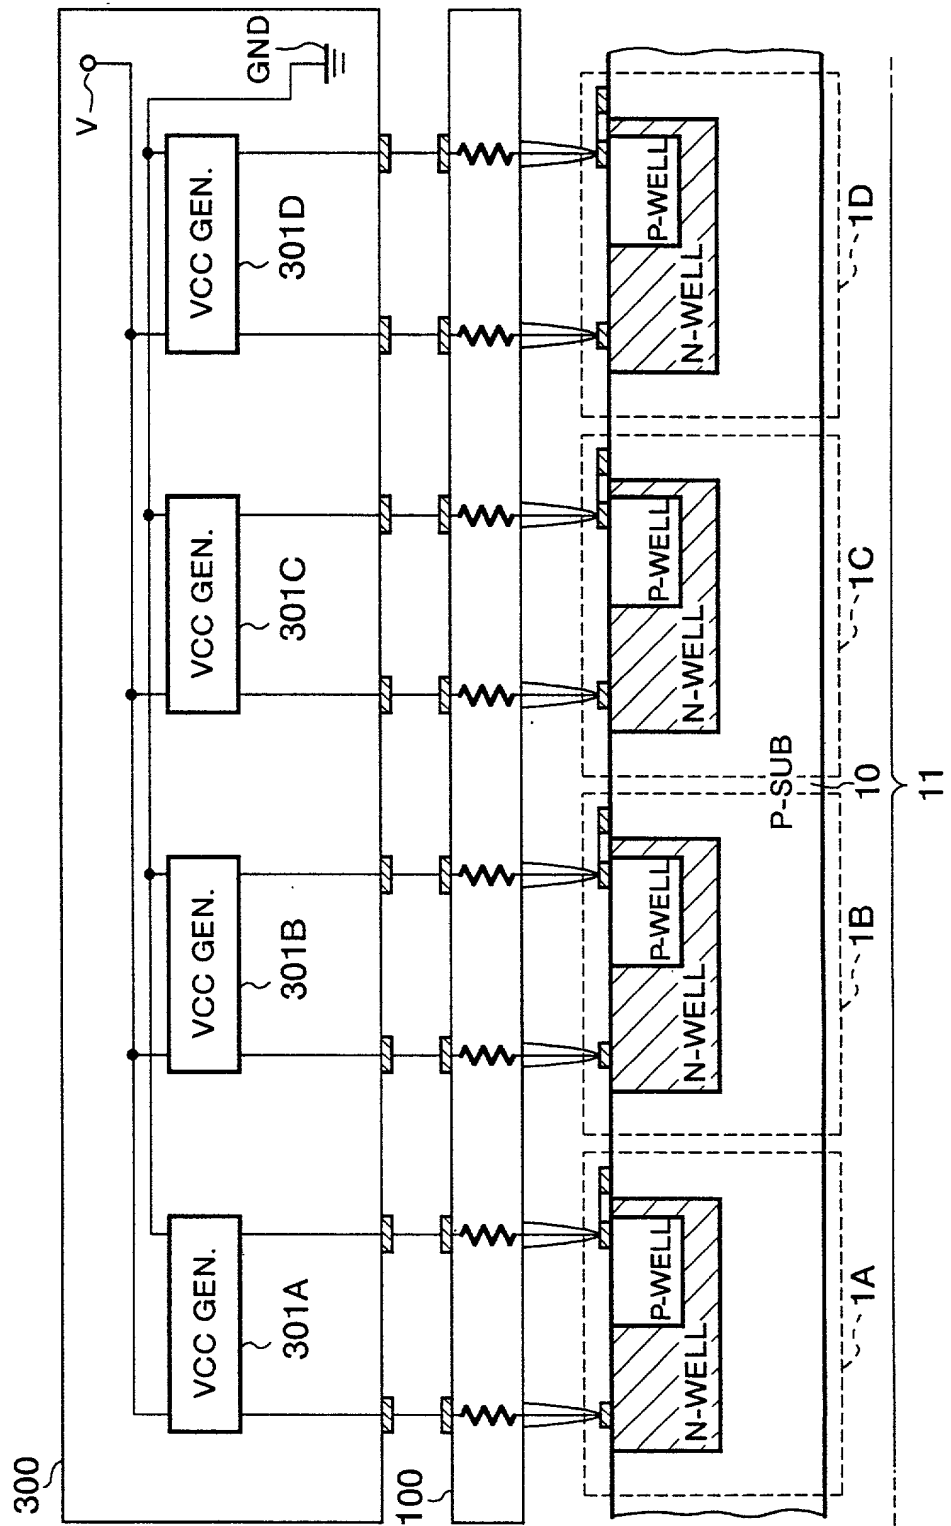


FIG. 30

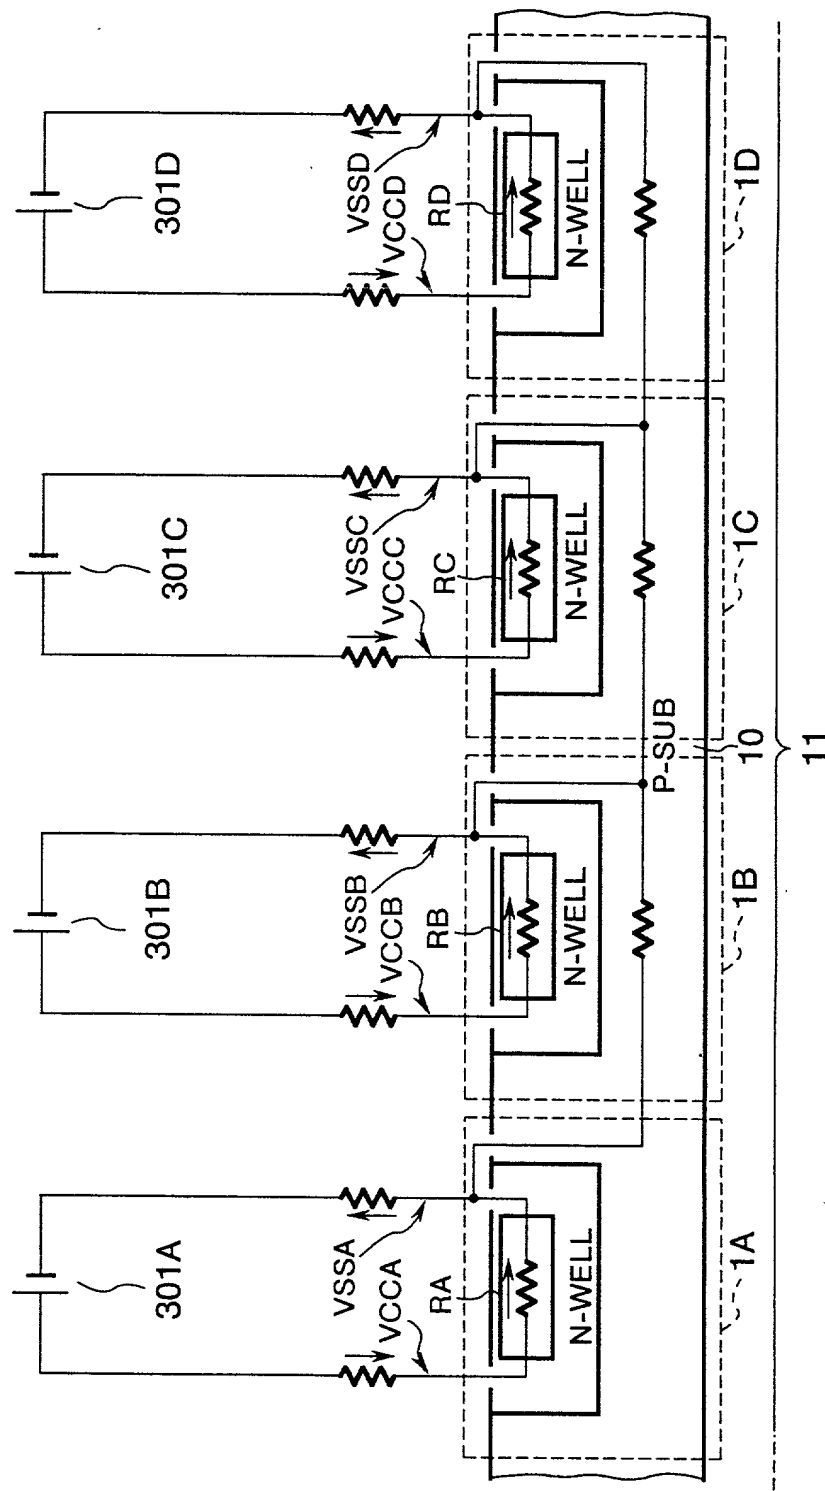


FIG. 31

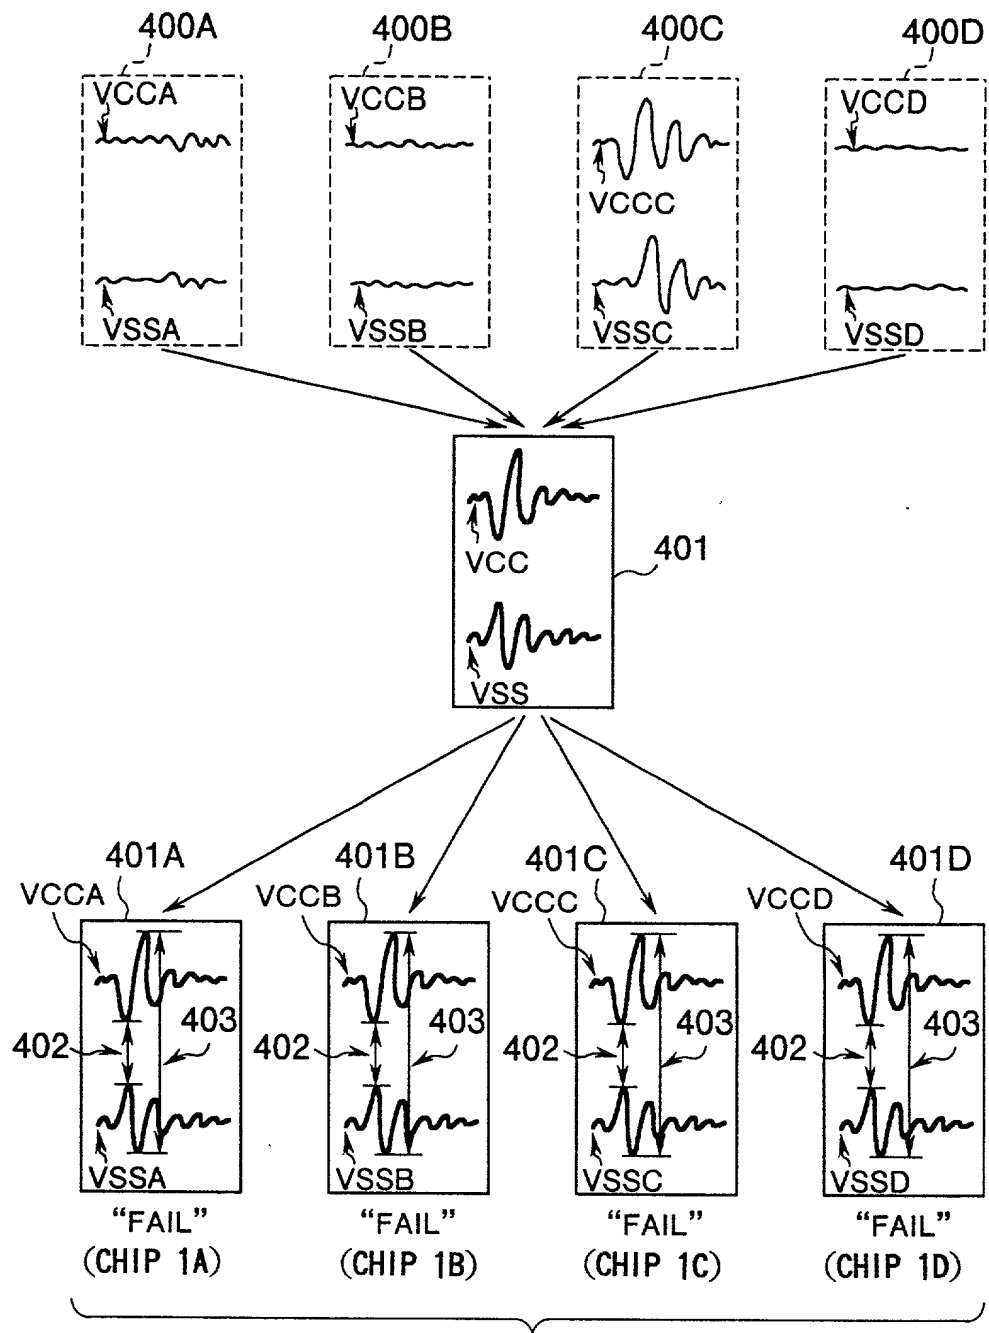
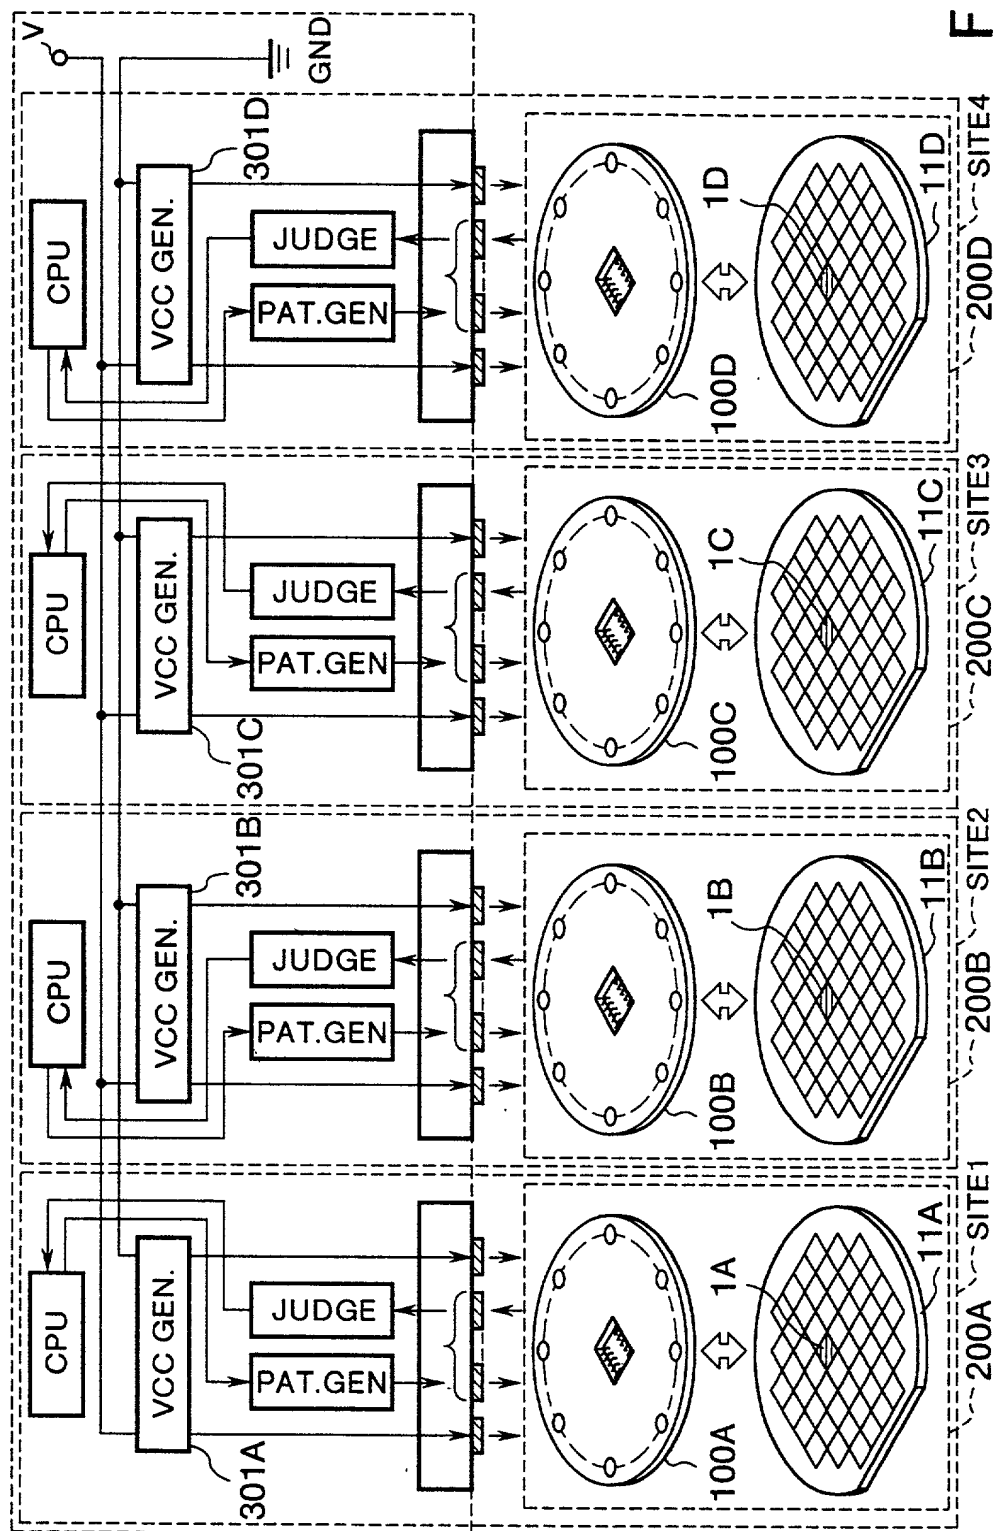


FIG. 32



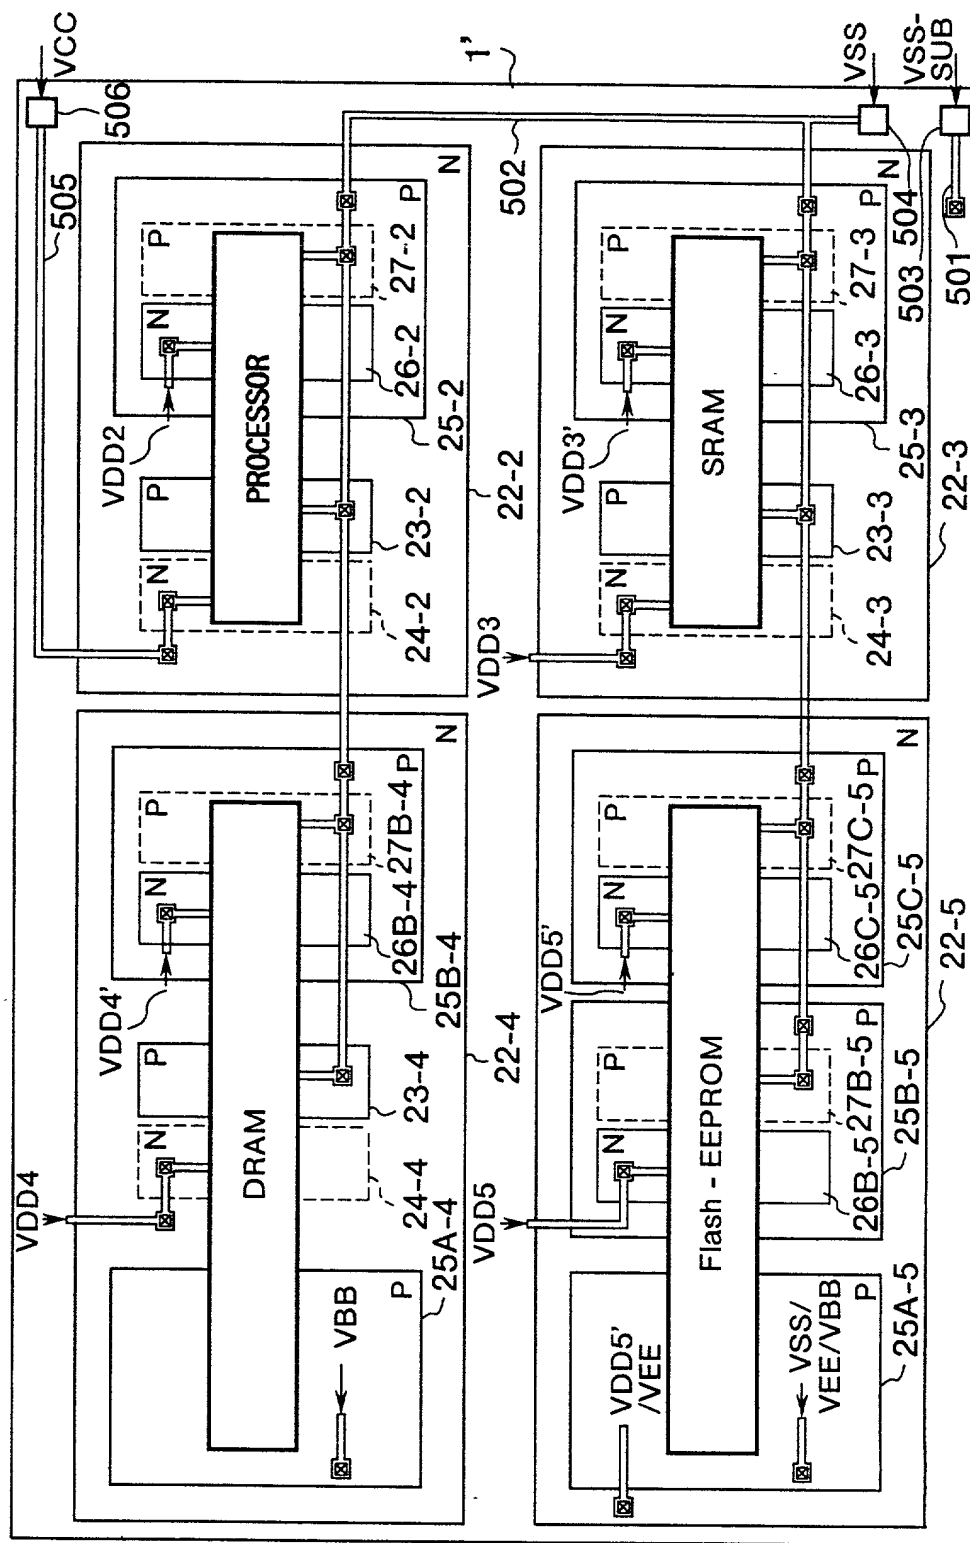


FIG. 34

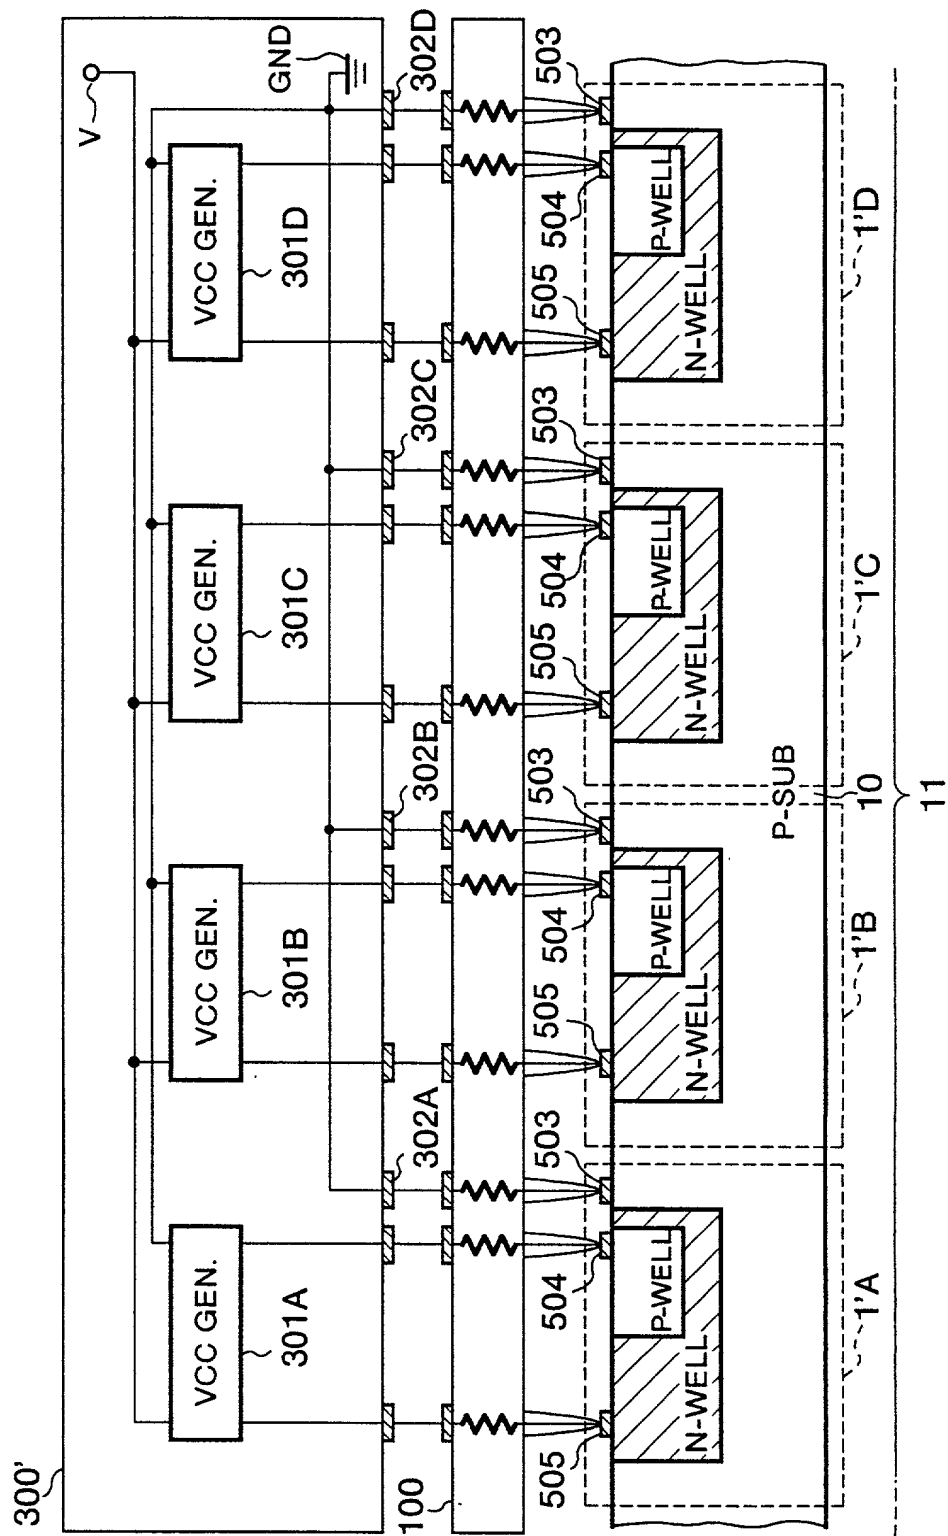


FIG. 35

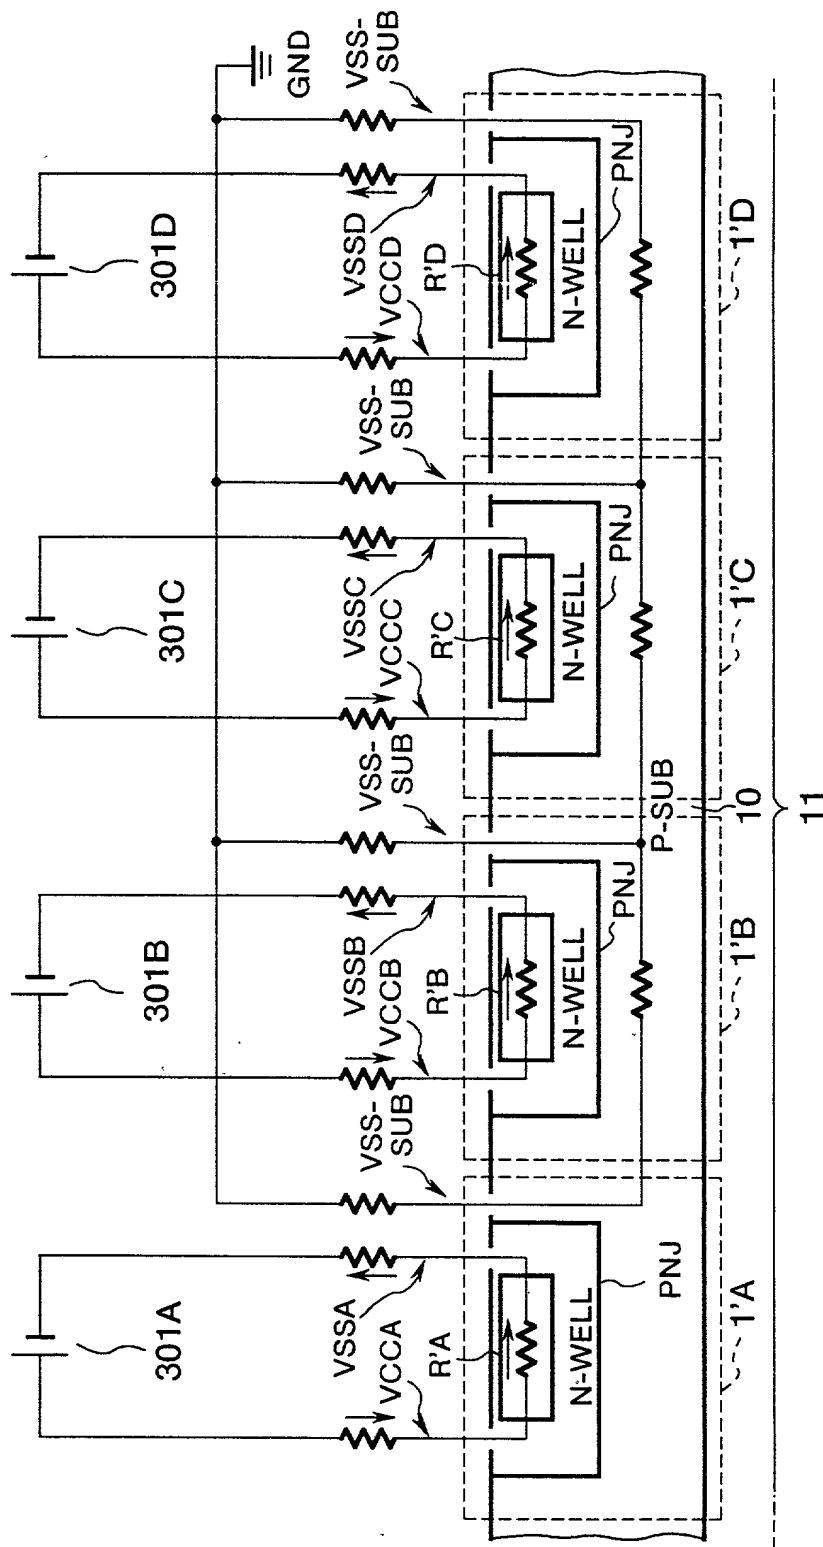


FIG. 36

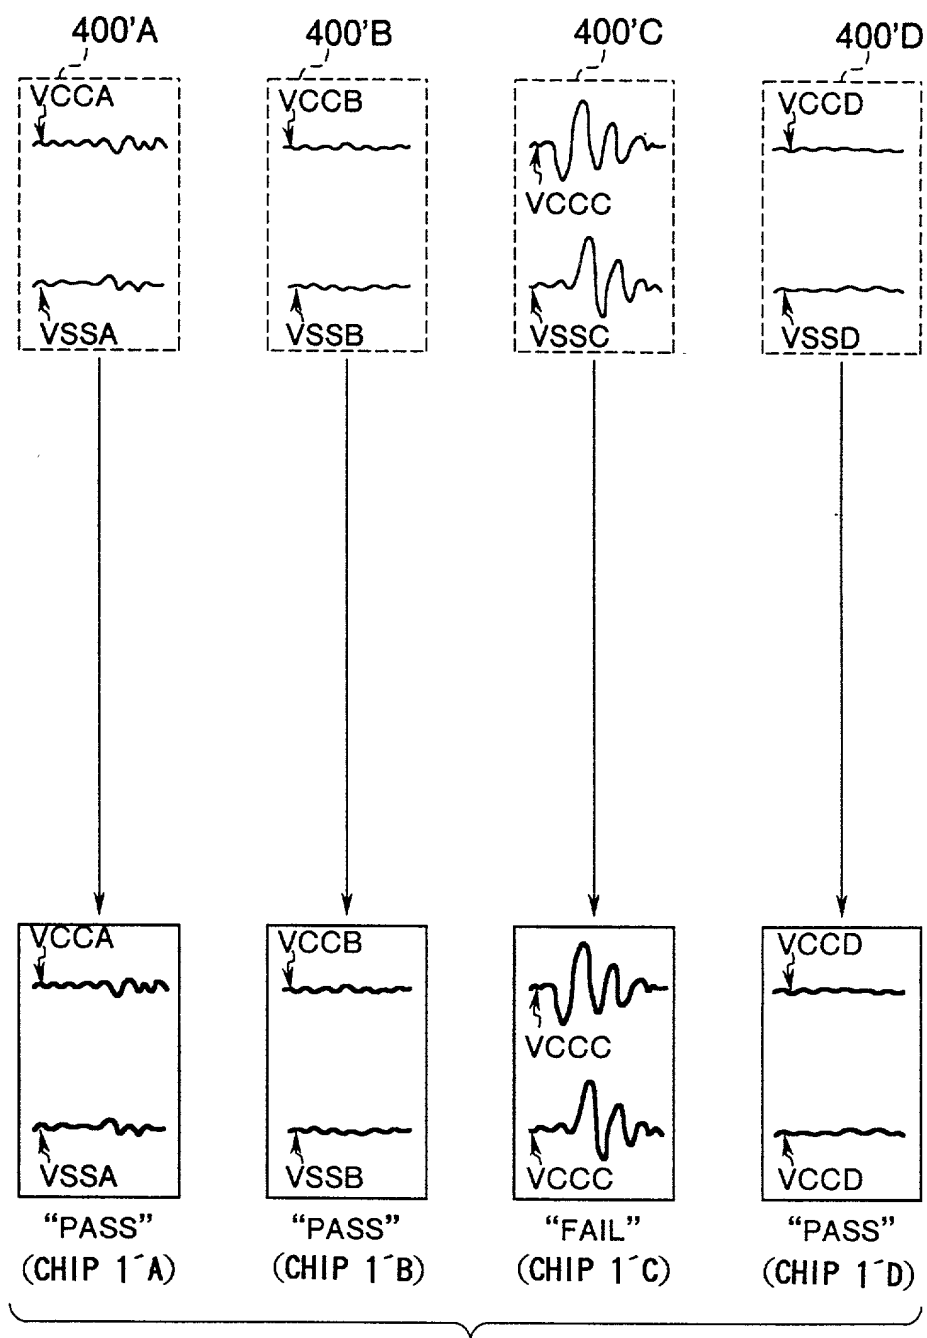


FIG. 37

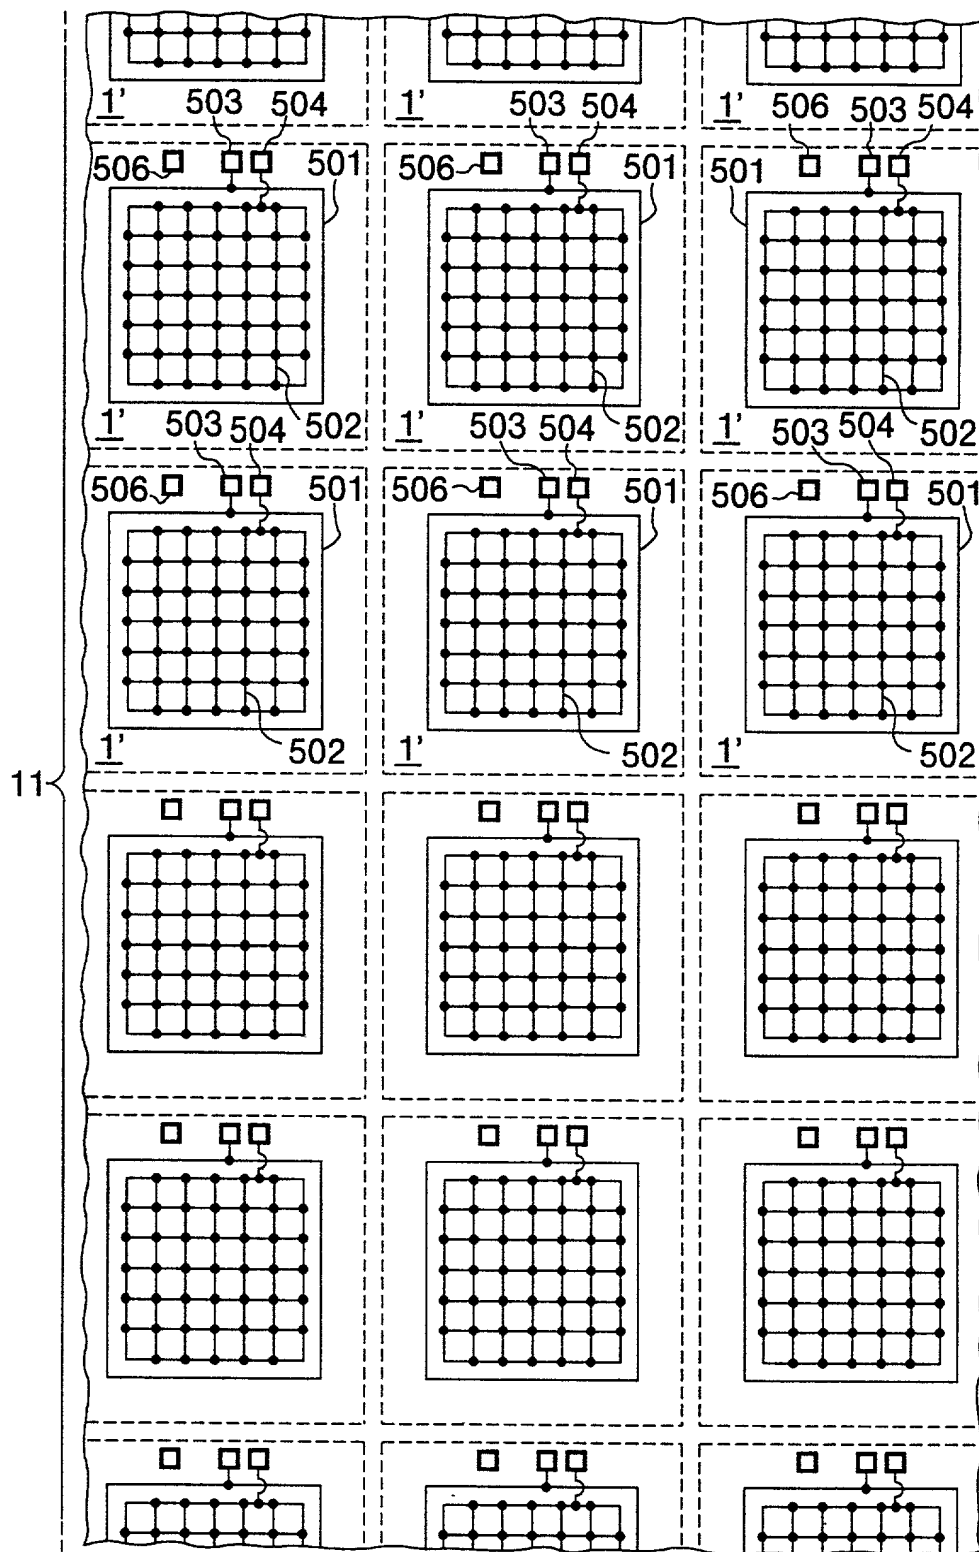


FIG. 38

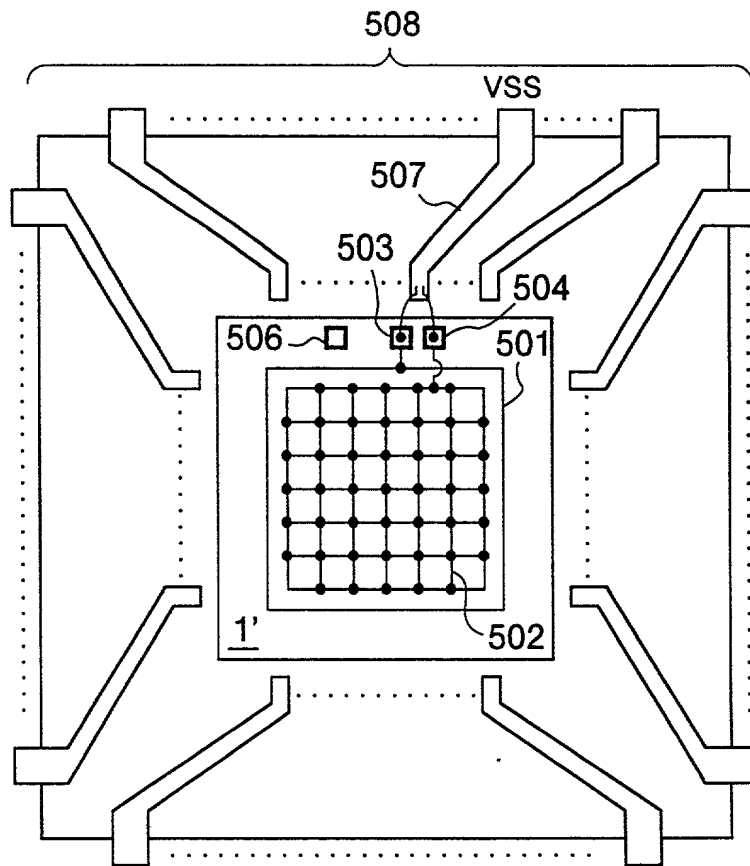


FIG. 39

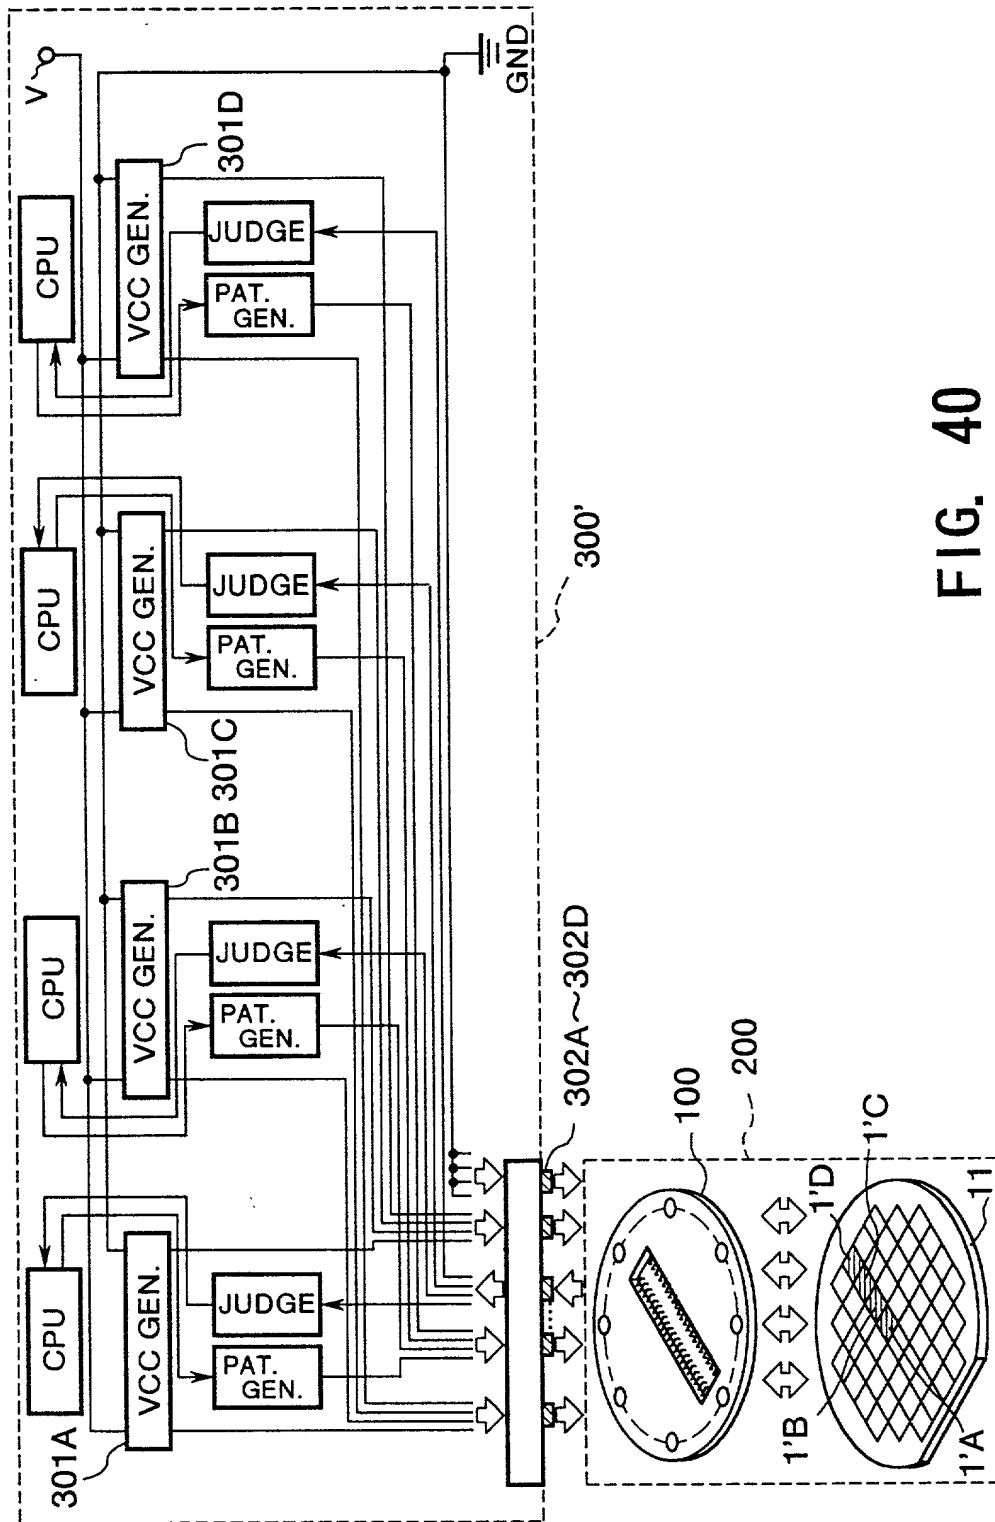


FIG. 40

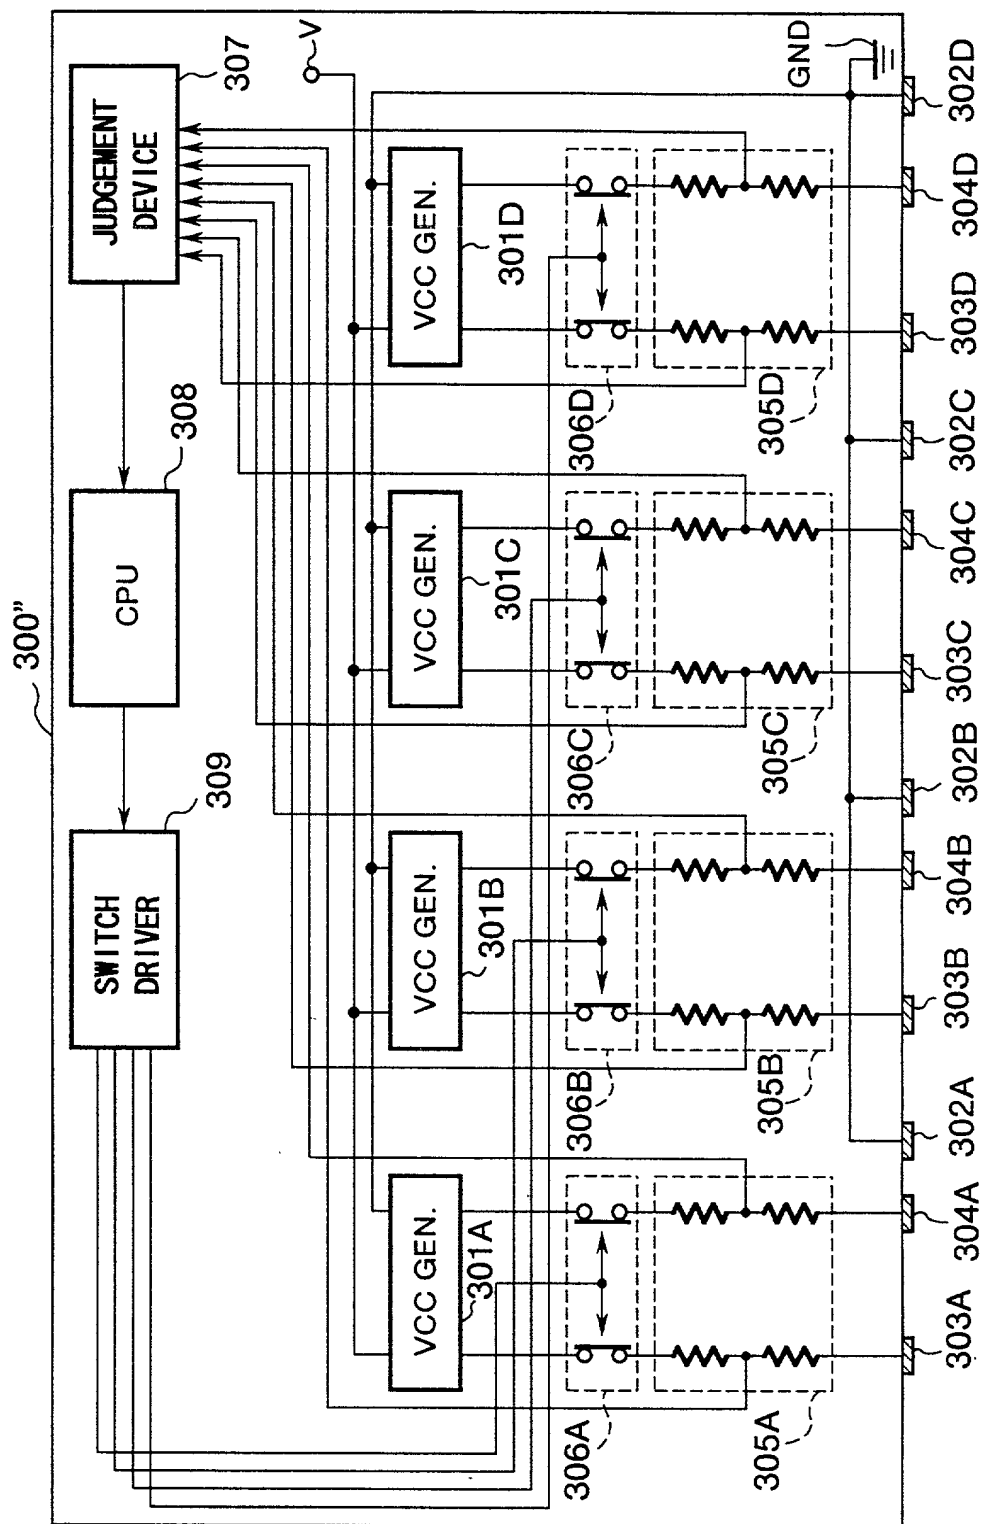


FIG. 41

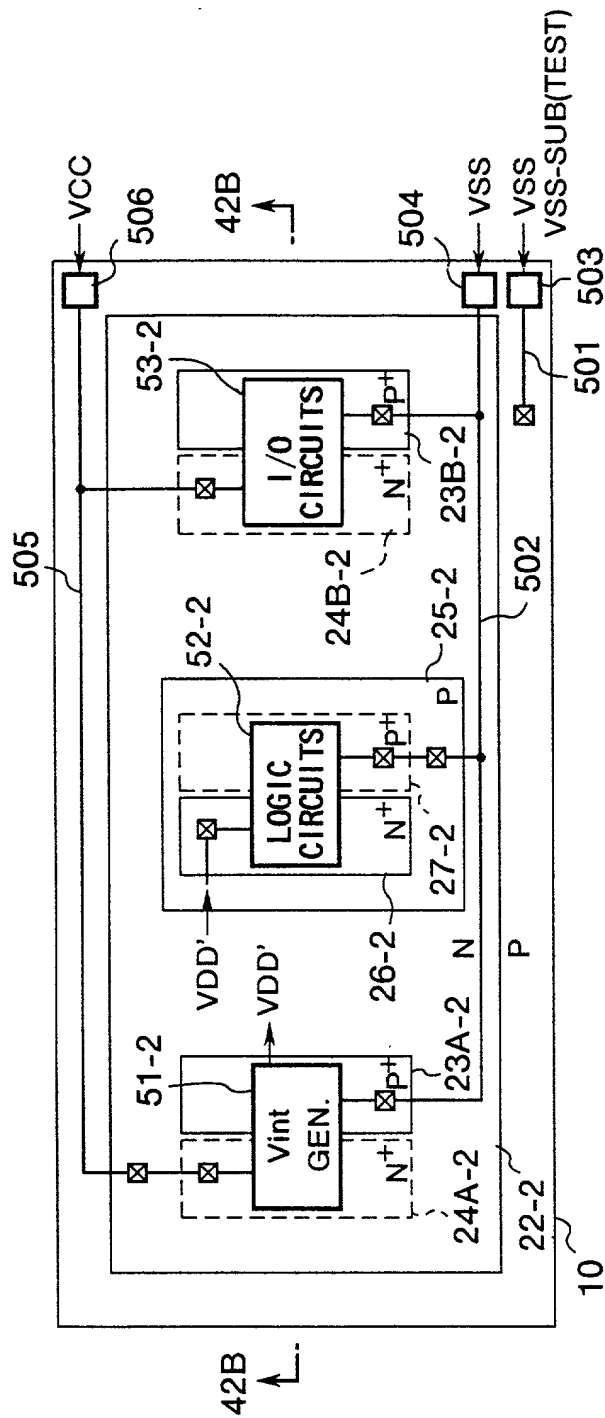


FIG. 42A

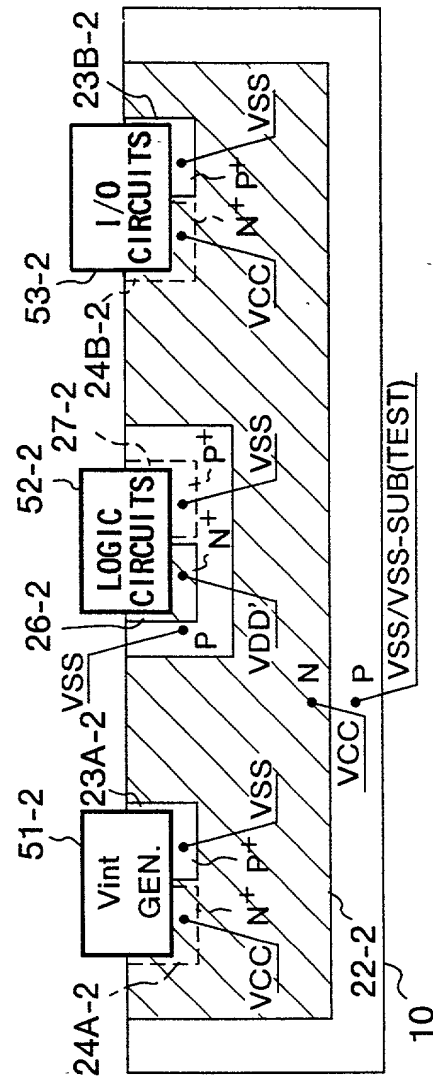


FIG. 42B

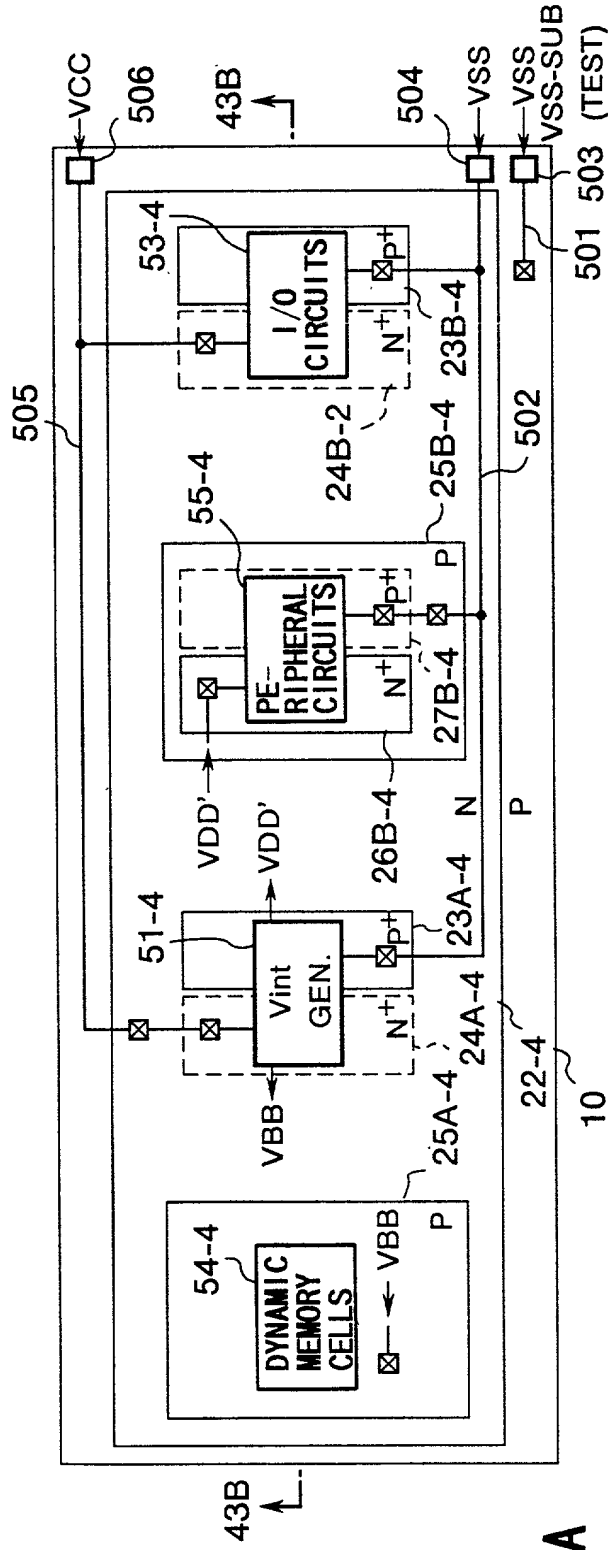


FIG. 43A

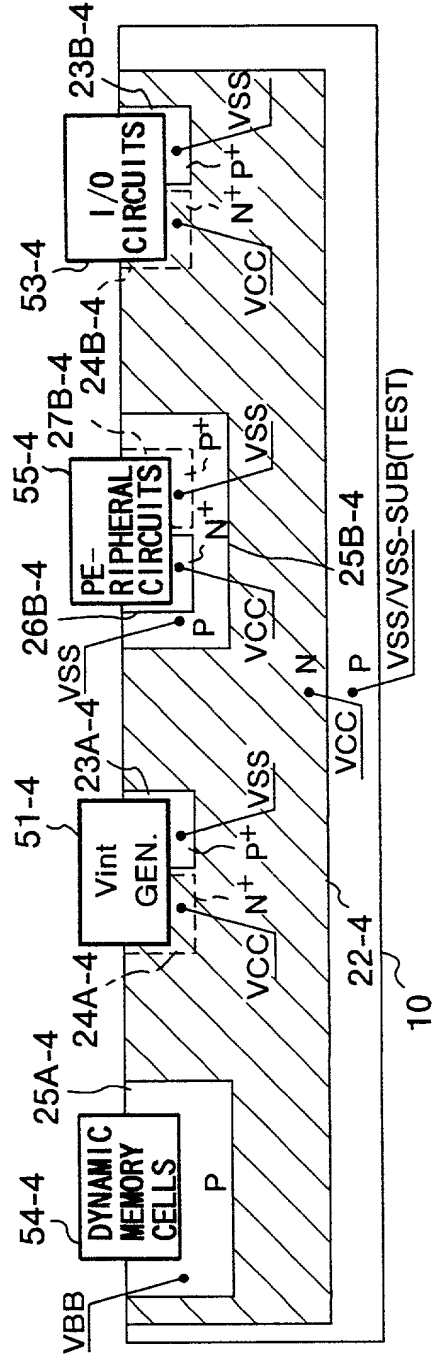


FIG. 43B

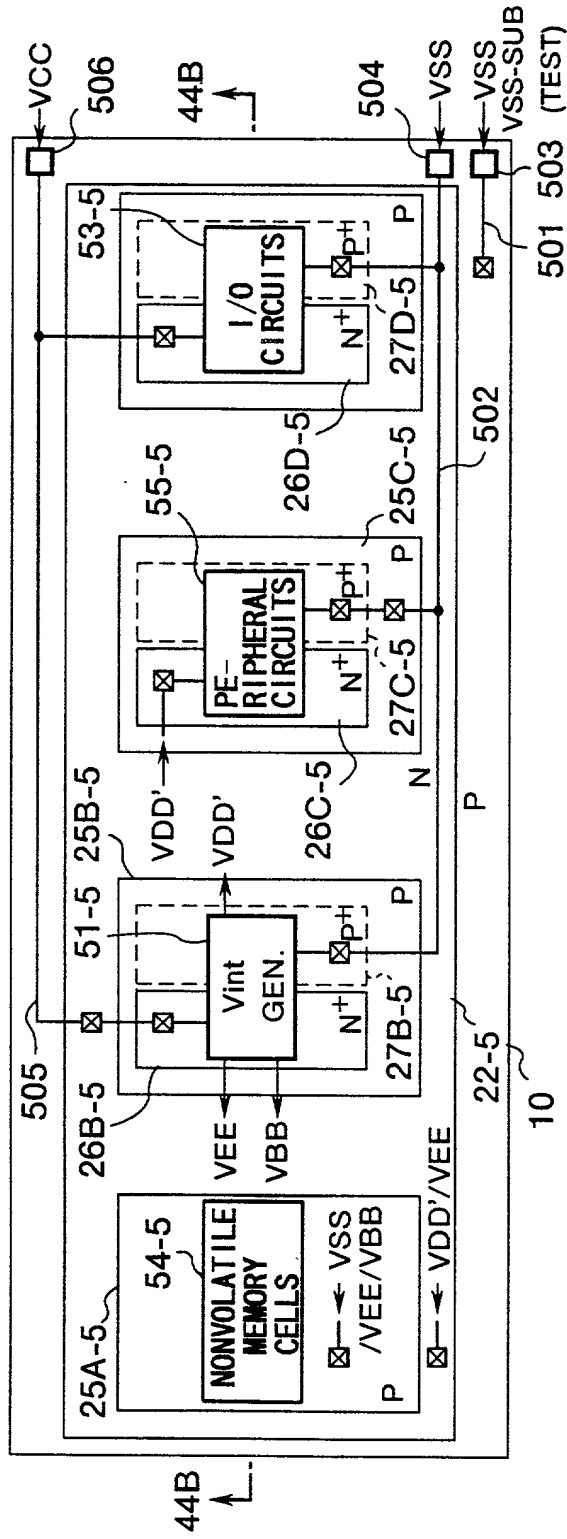


FIG. 44A

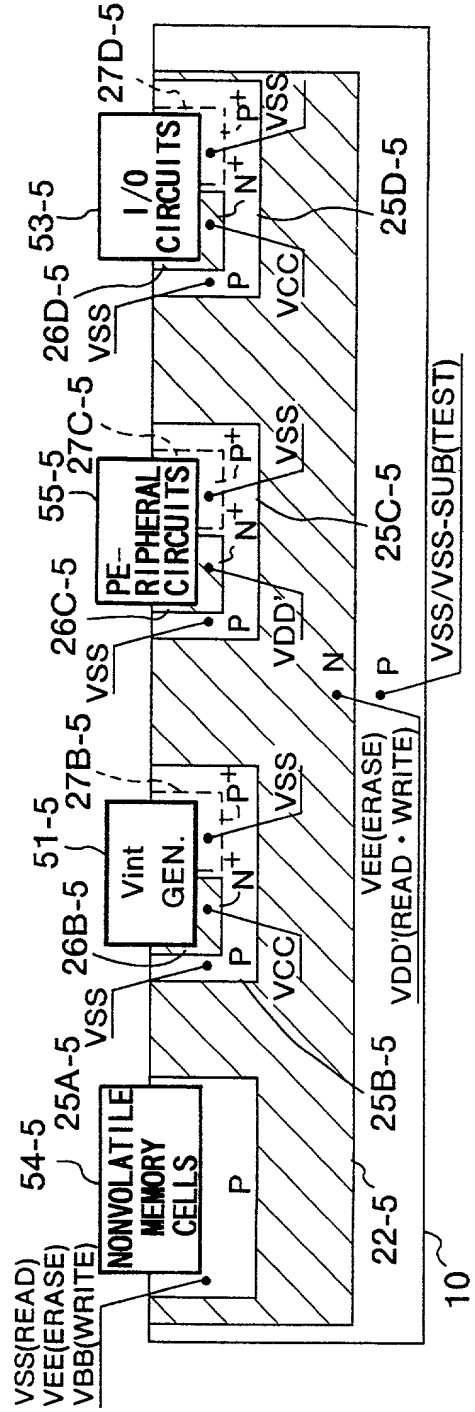
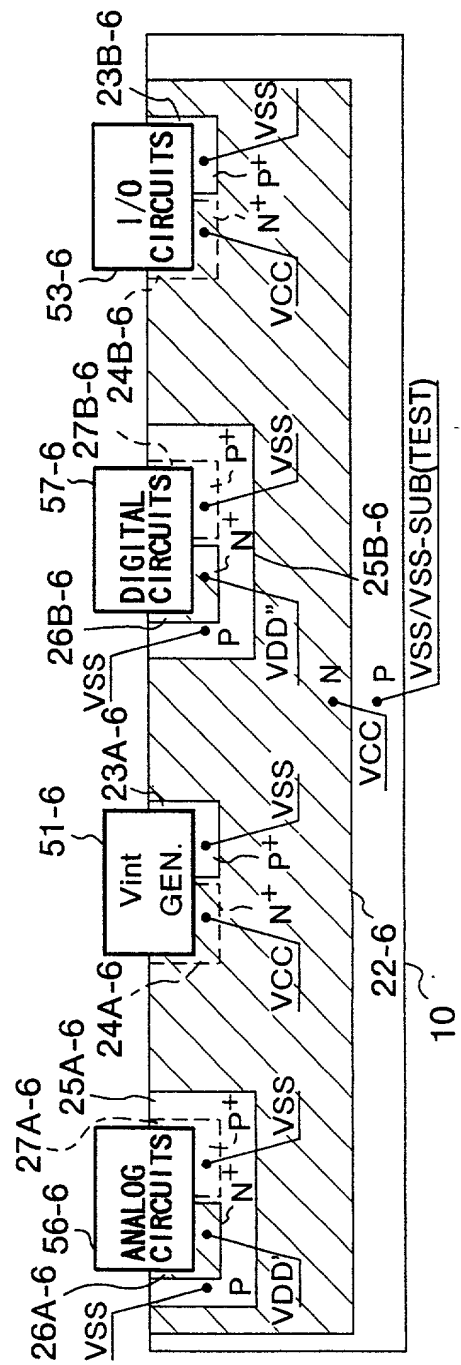
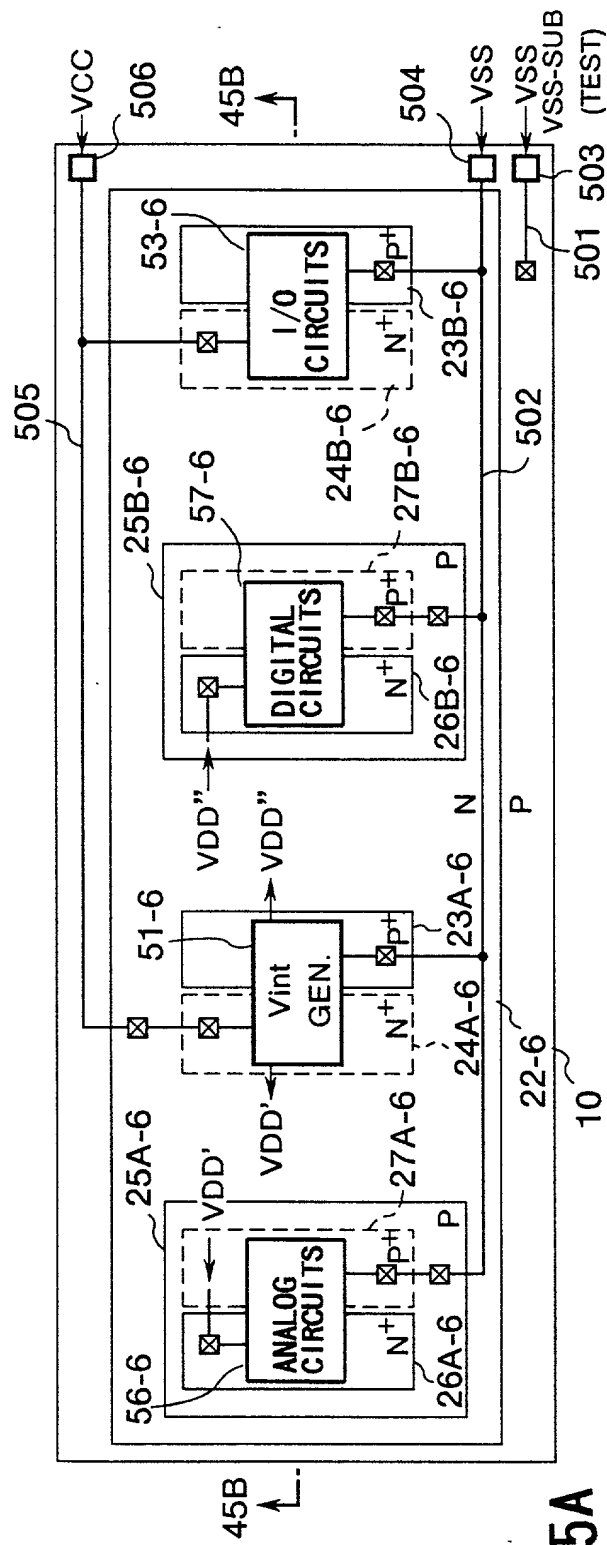


FIG. 44B



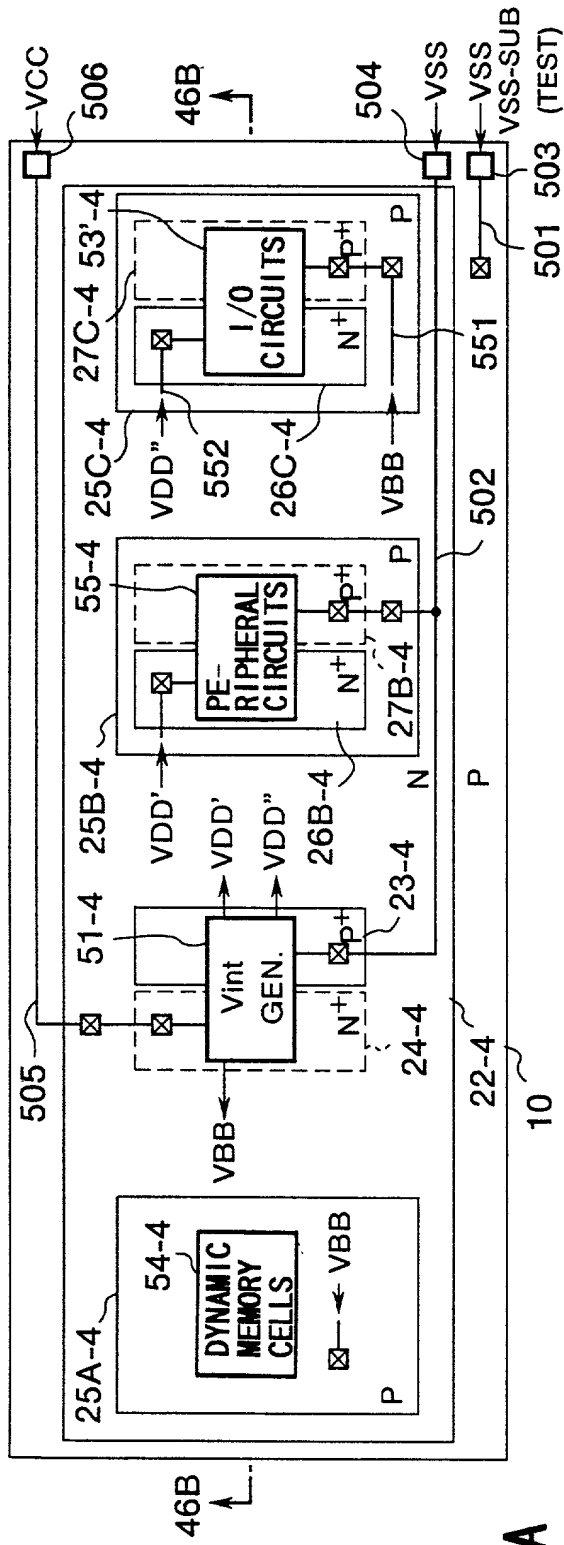


FIG. 46A

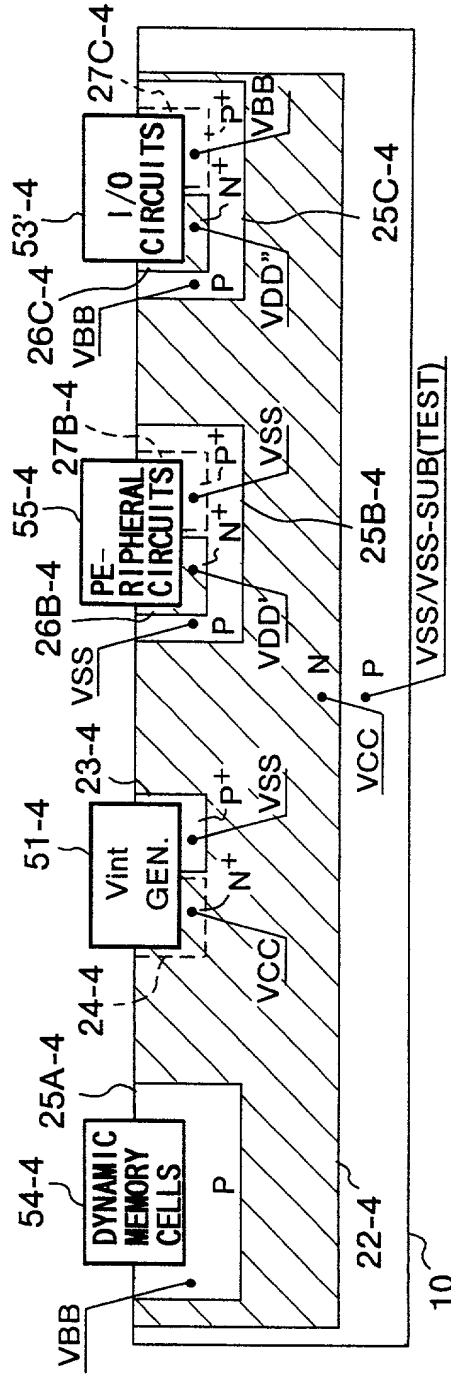


FIG. 46B

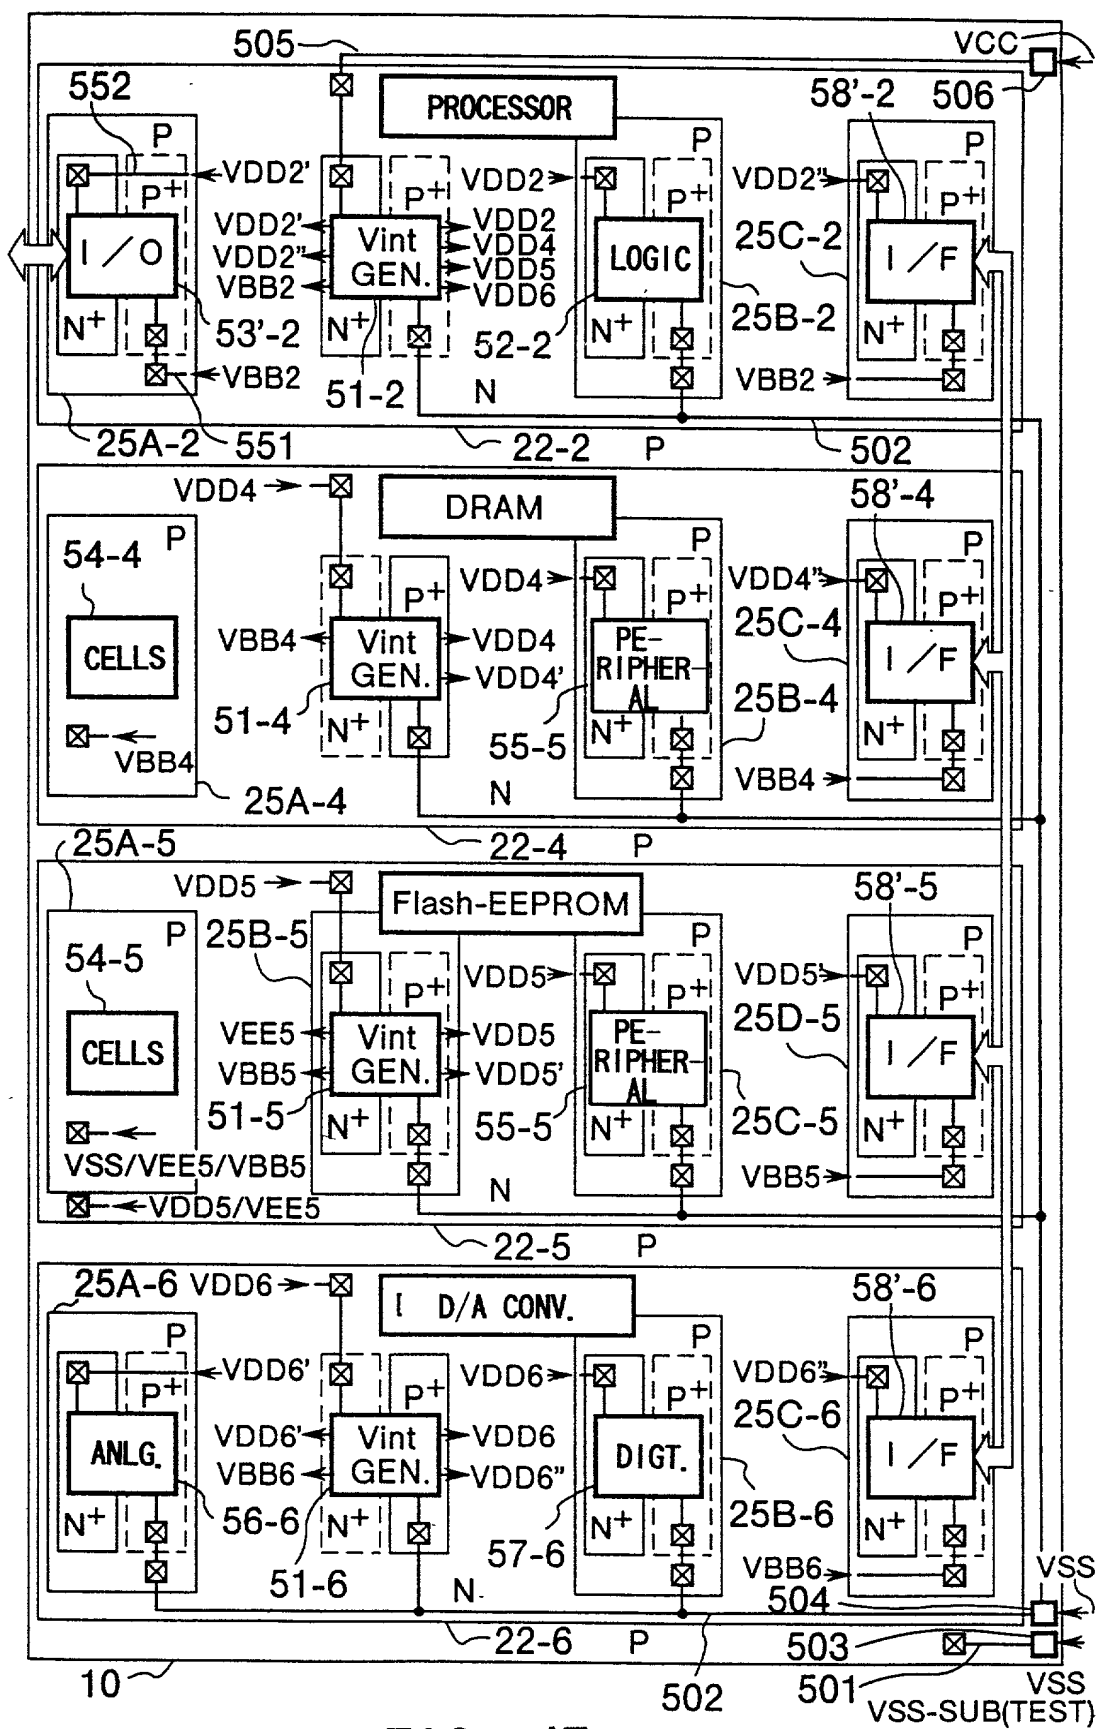


FIG. 47

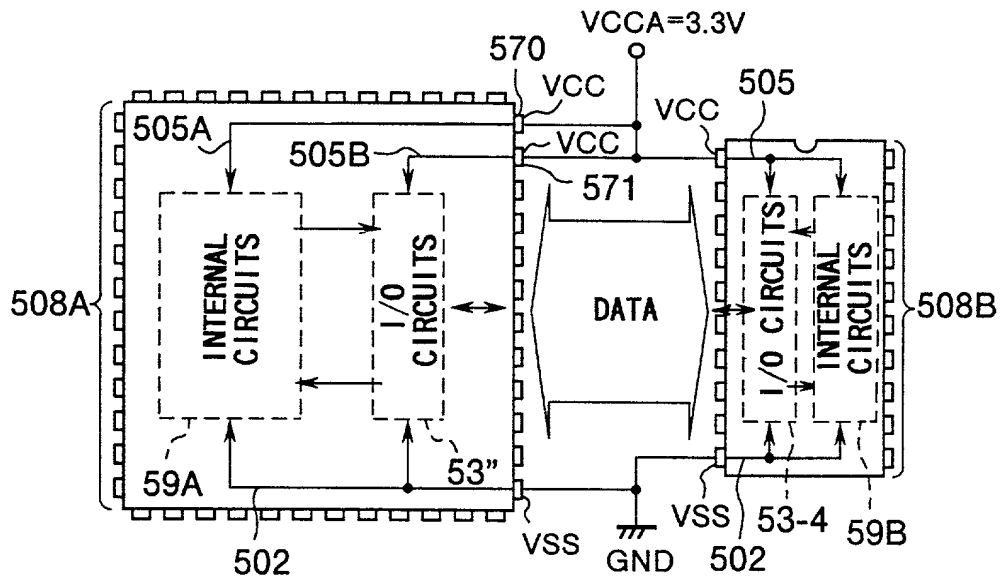


FIG. 48A

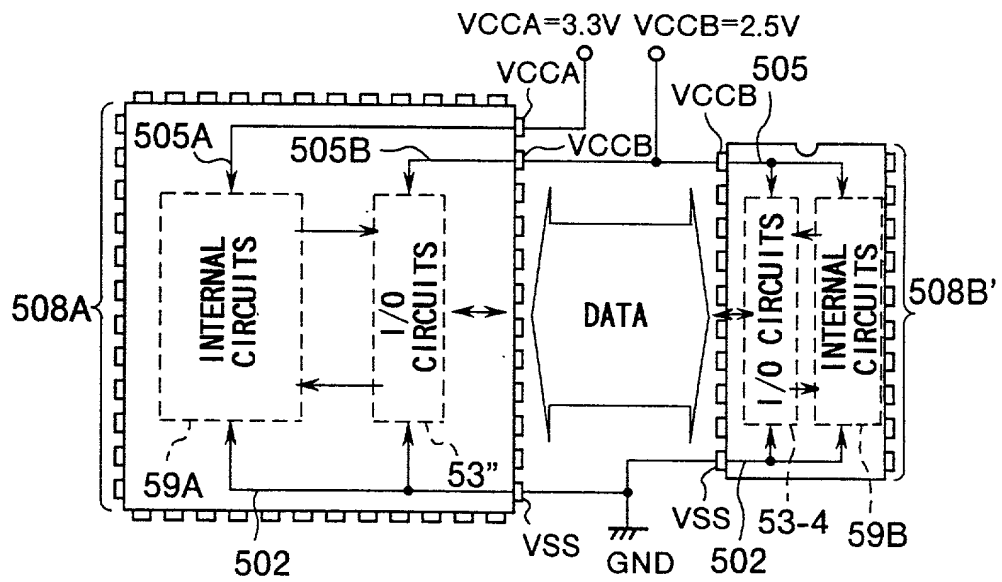


FIG. 48B

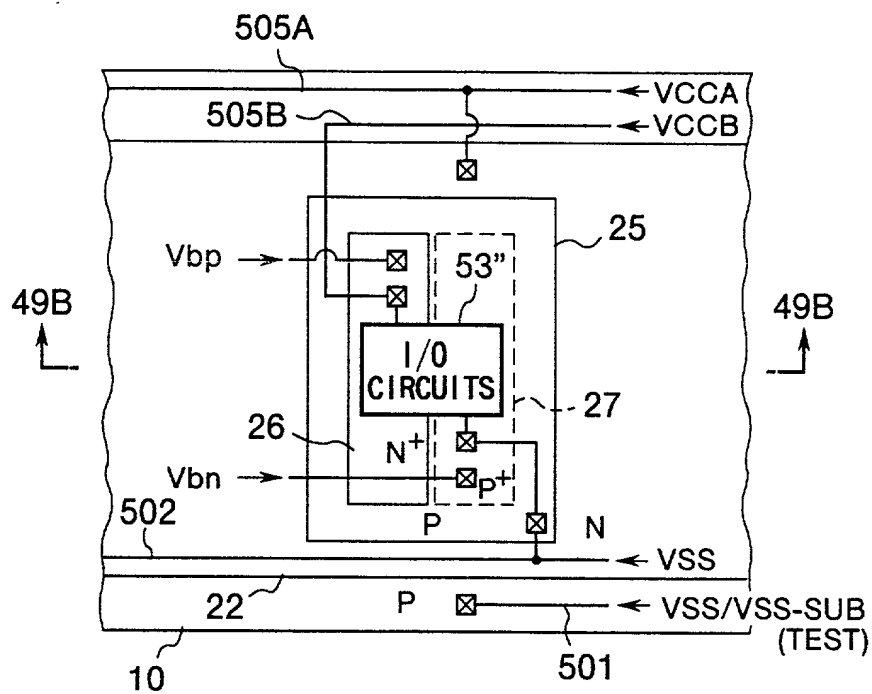


FIG. 49A

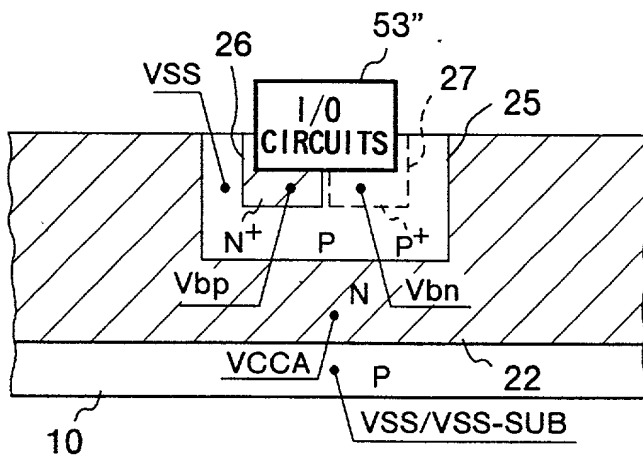


FIG. 49B

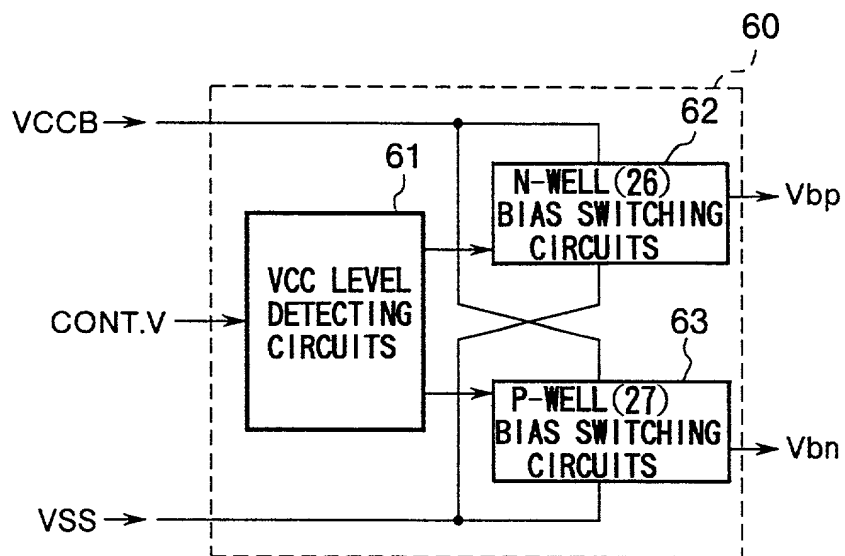


FIG. 50A

VCCA=3.3V VCCB=2.5V			VCCA = VCCB = 3.3V		
CONT.V	Vbp	Vbn	CONT.V	Vbp	Vbn
1	4.5V	-1.5V	0	3.3V (VCCB)	0V (VSS)

FIG. 50B

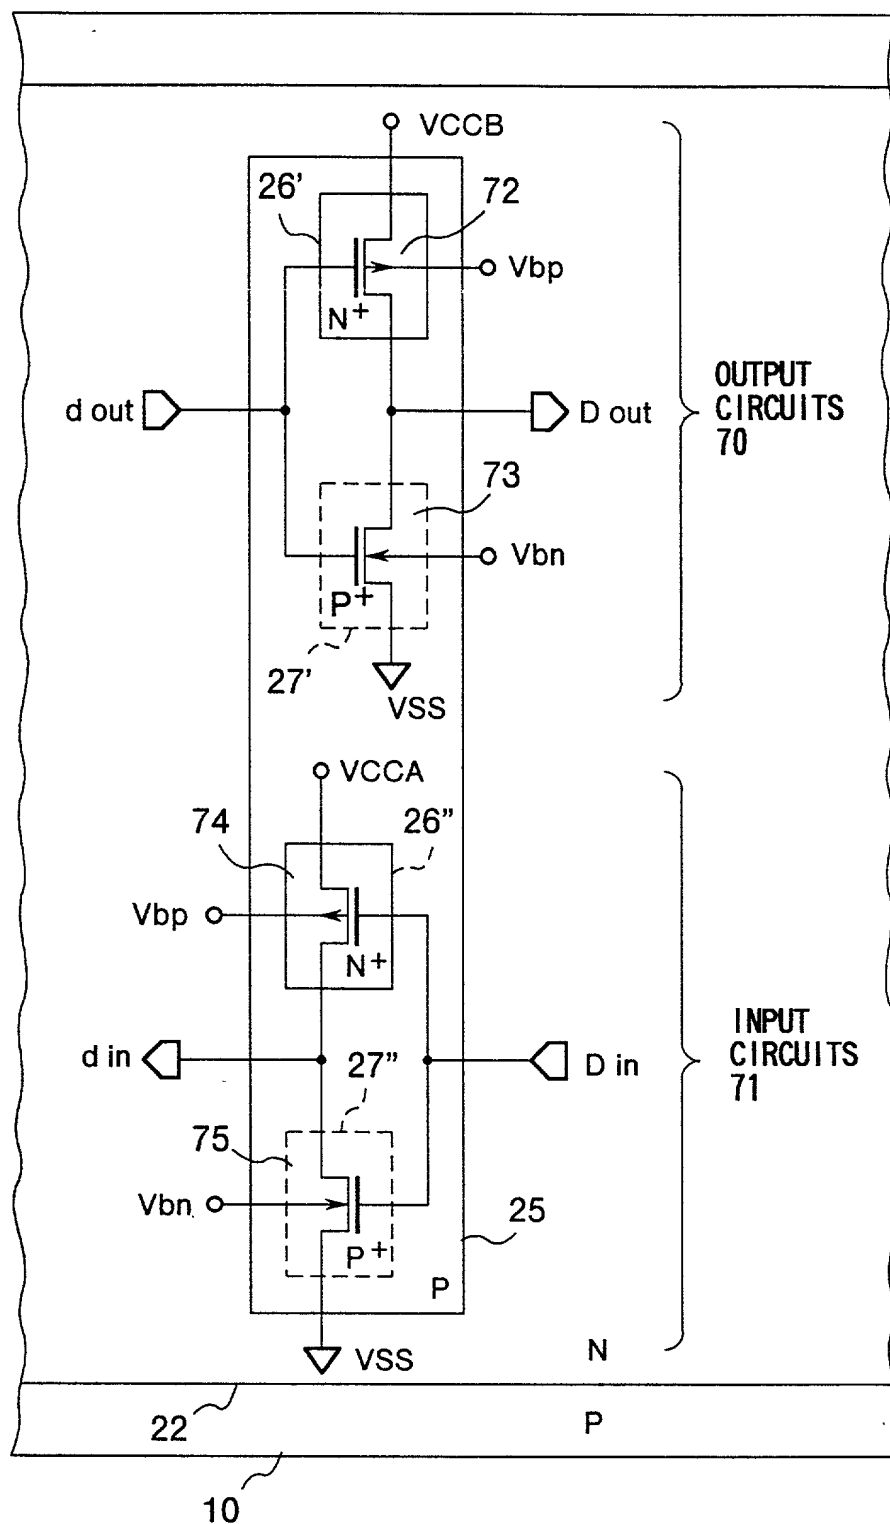


FIG. 51

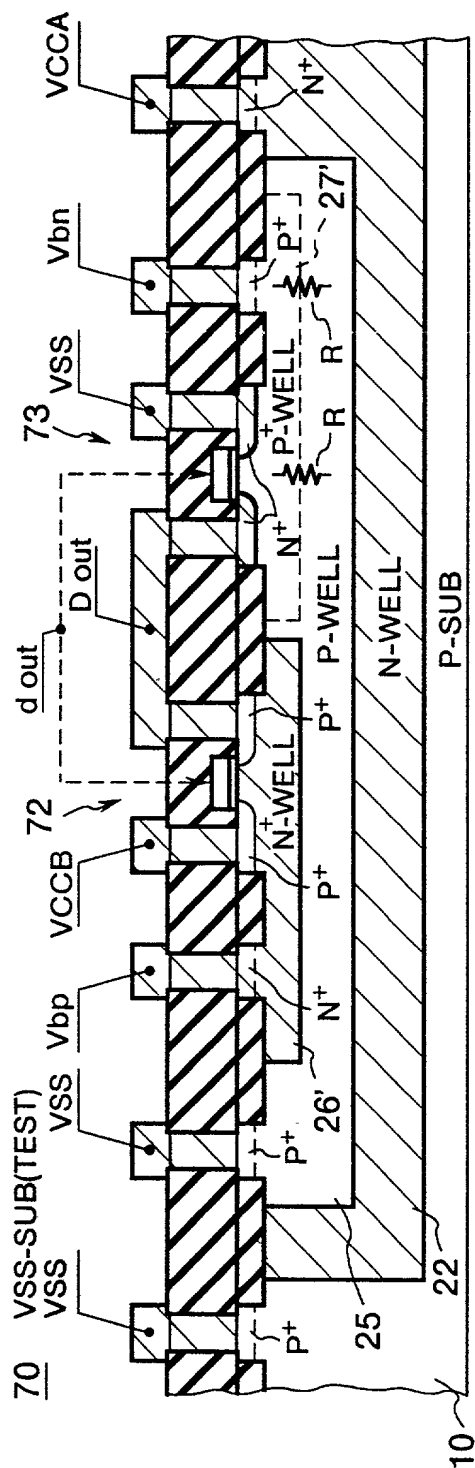


FIG. 52A

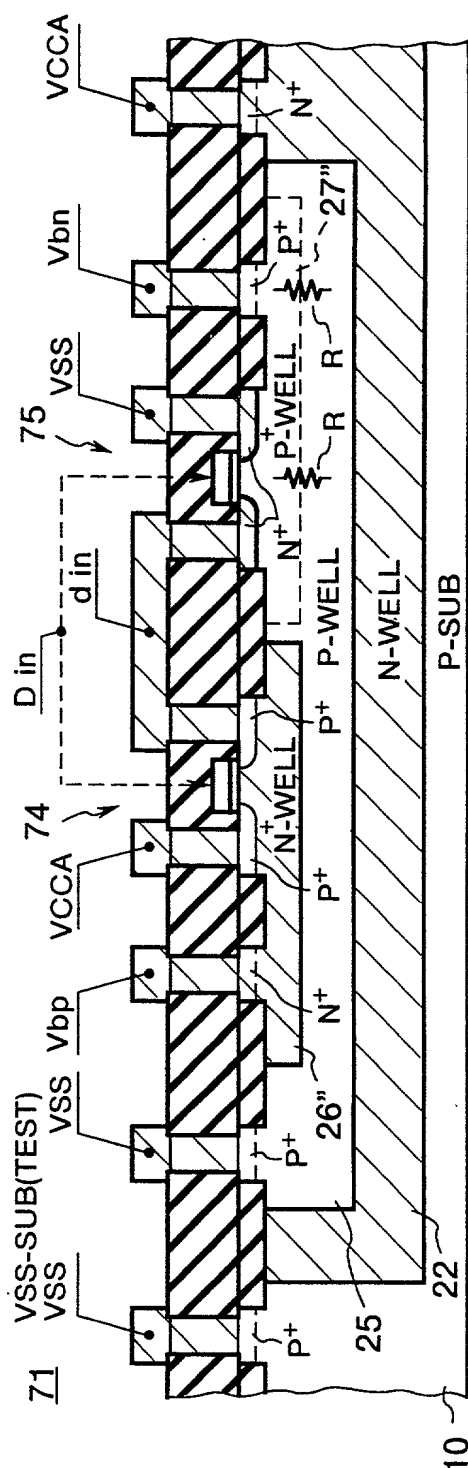


FIG. 52B

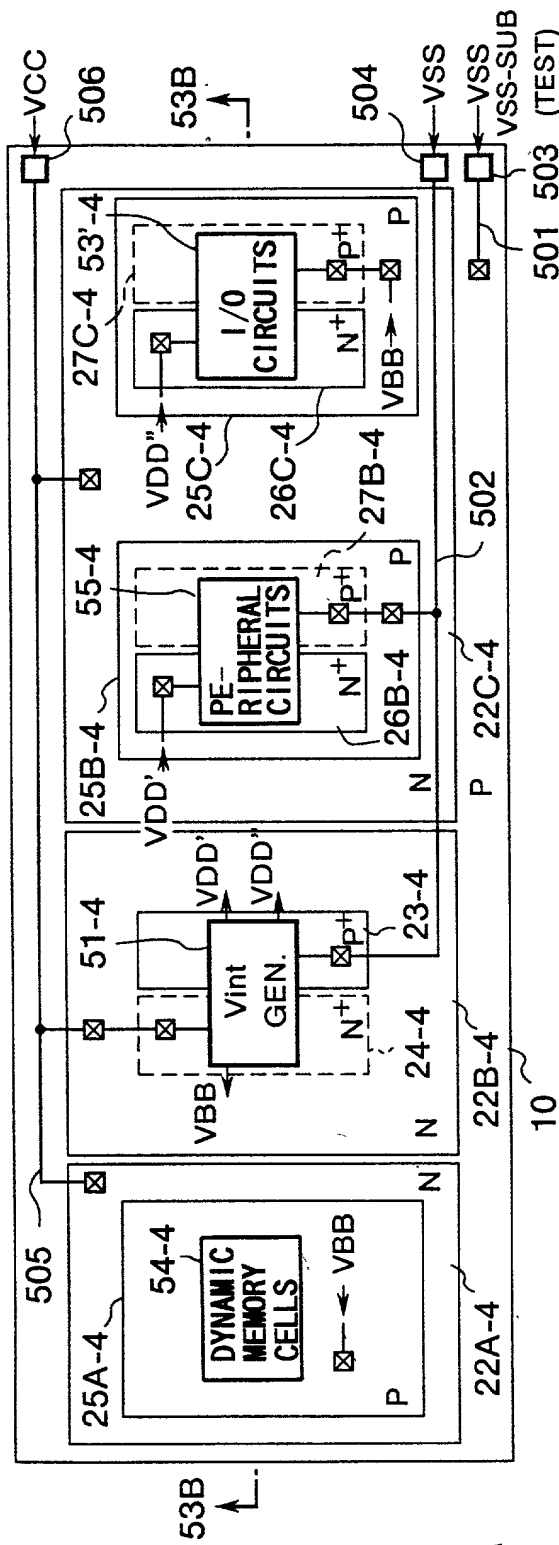


FIG. 53A

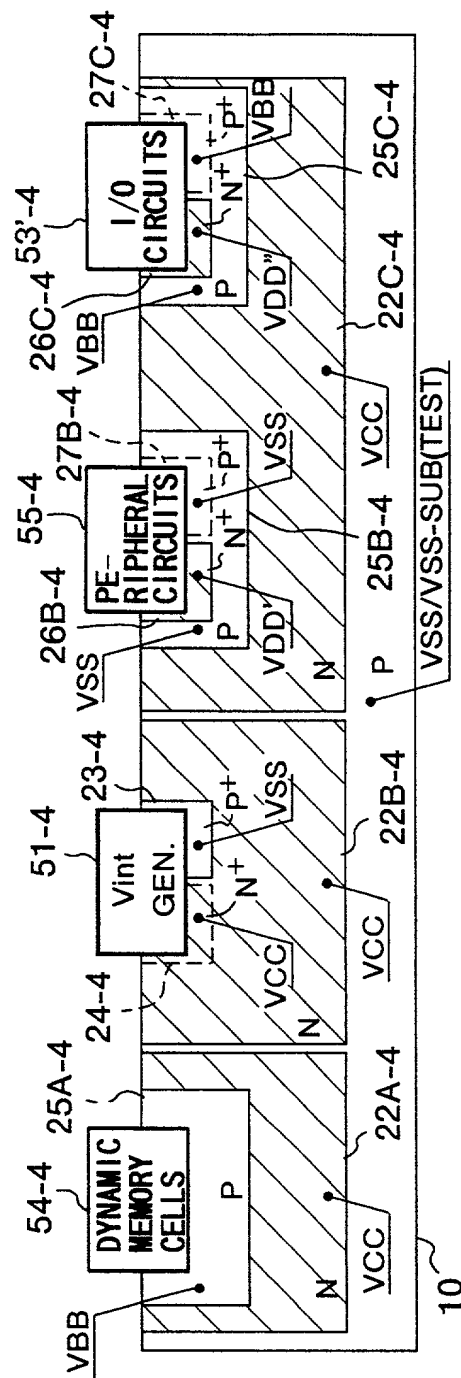


FIG. 53B

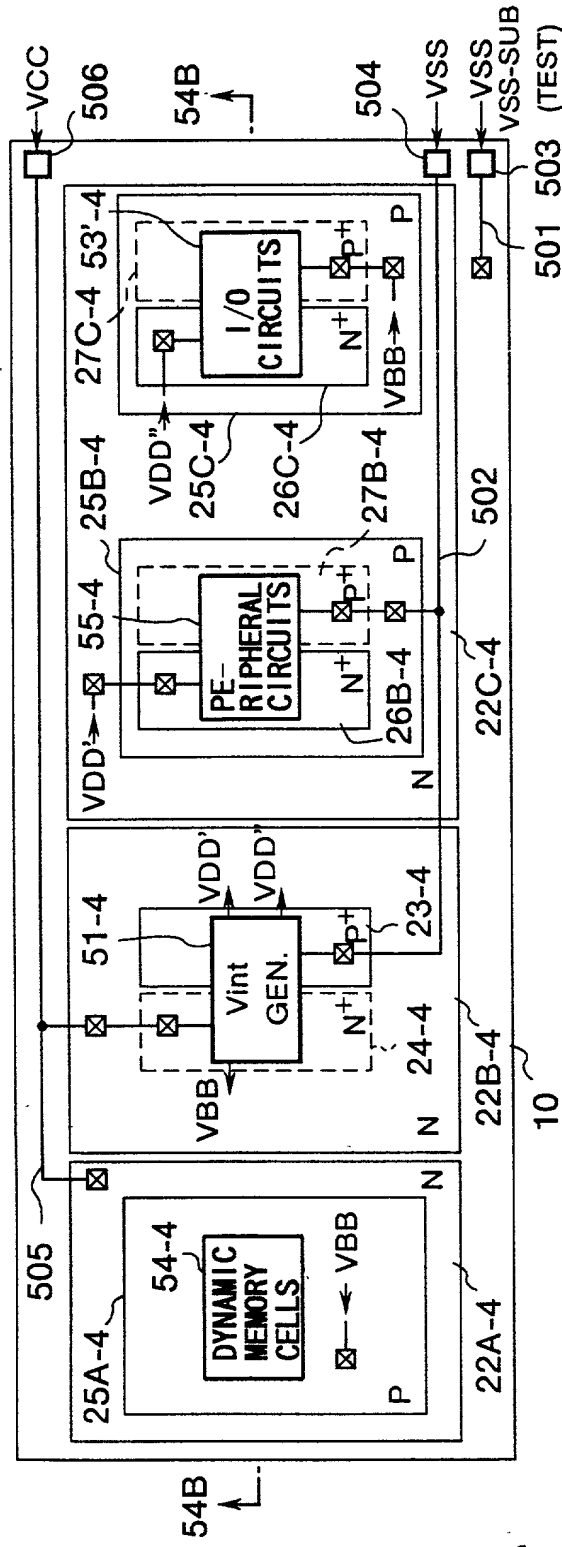


FIG. 54A

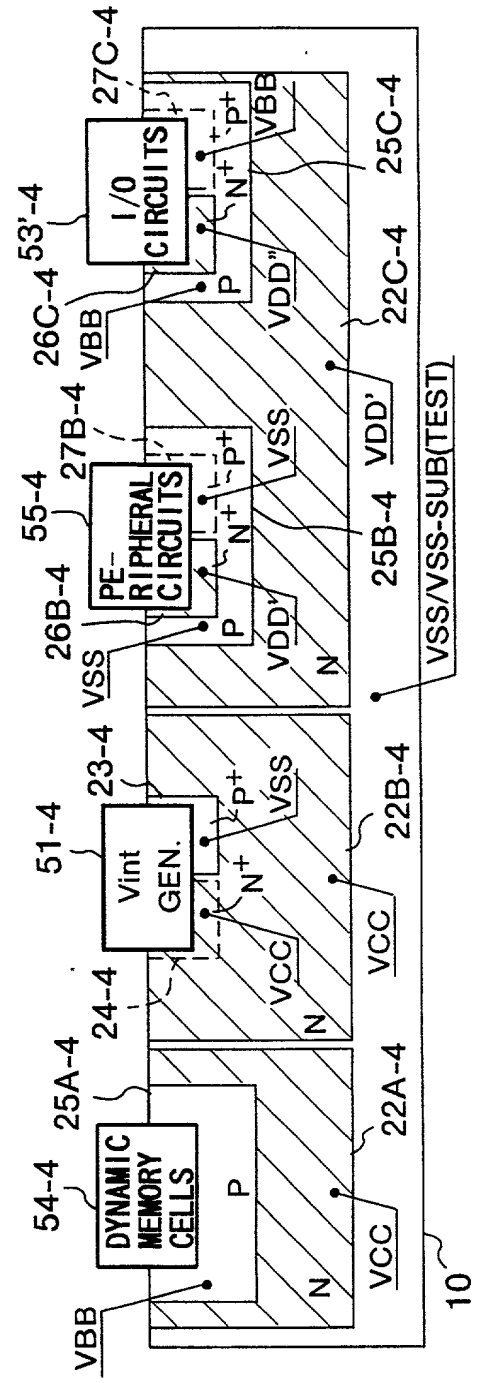
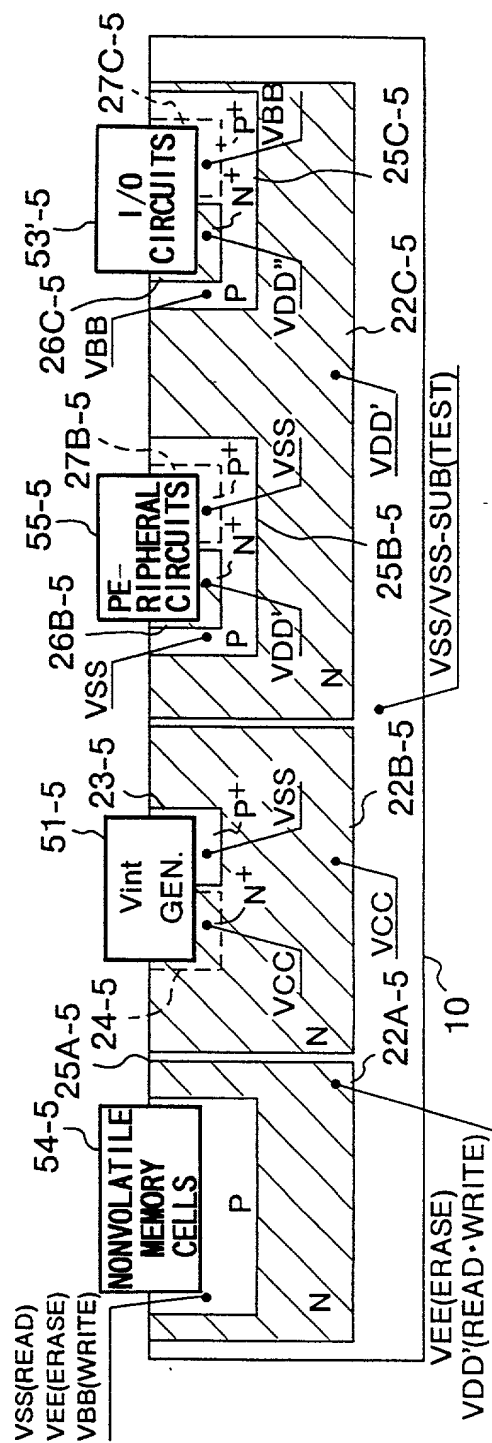
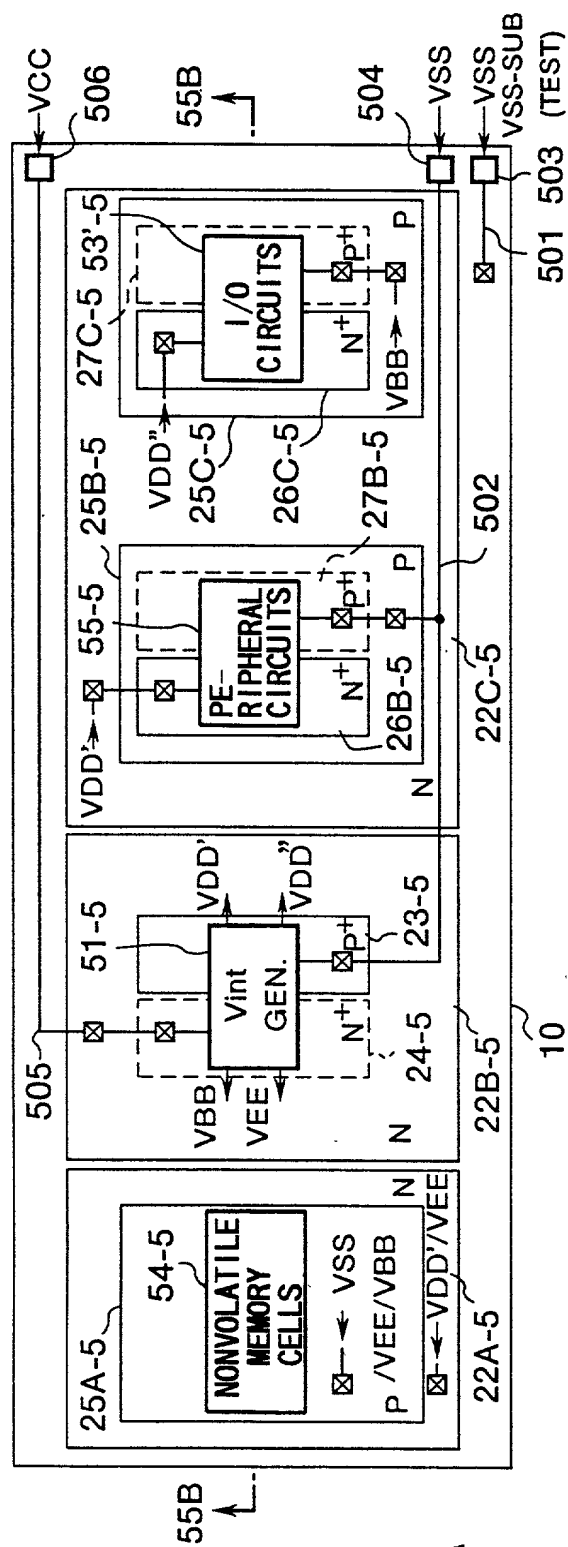


FIG. 54B



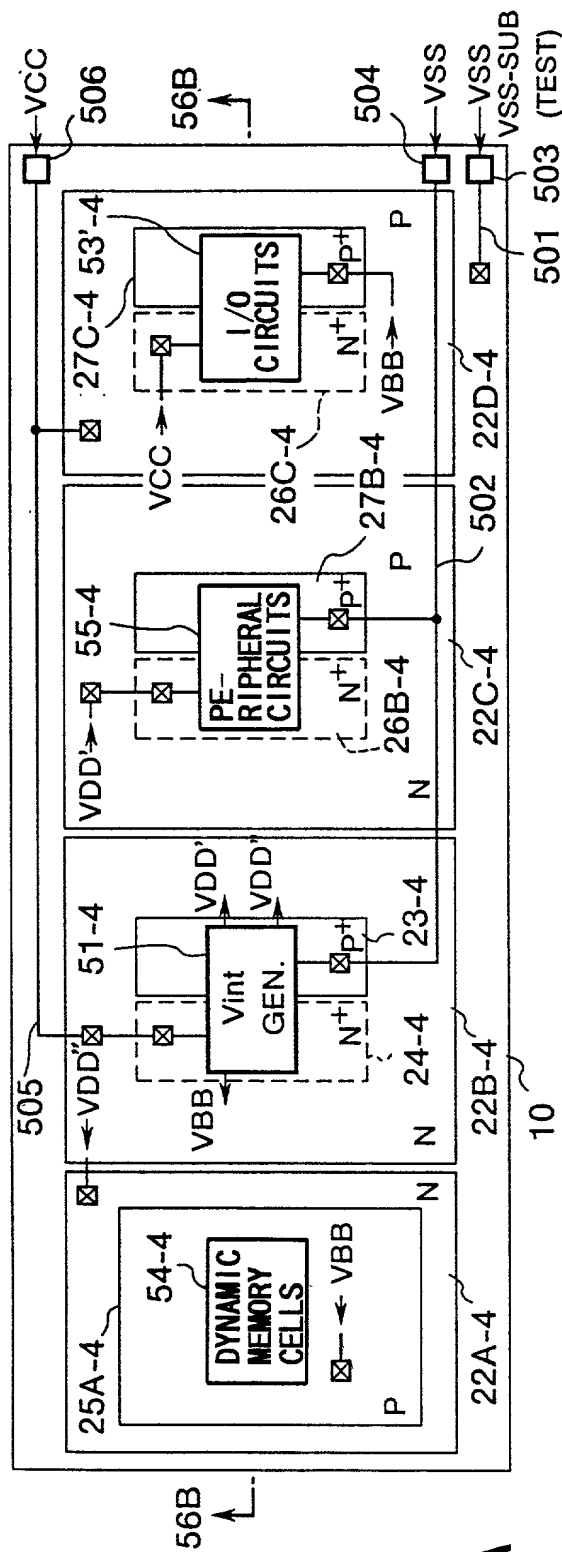


FIG. 56A

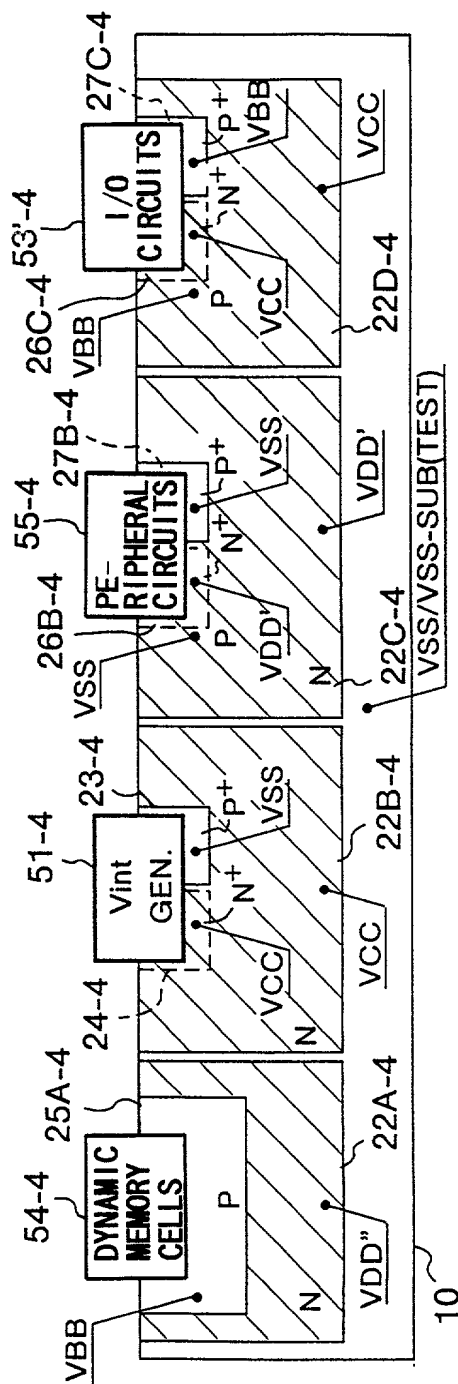


FIG. 56B

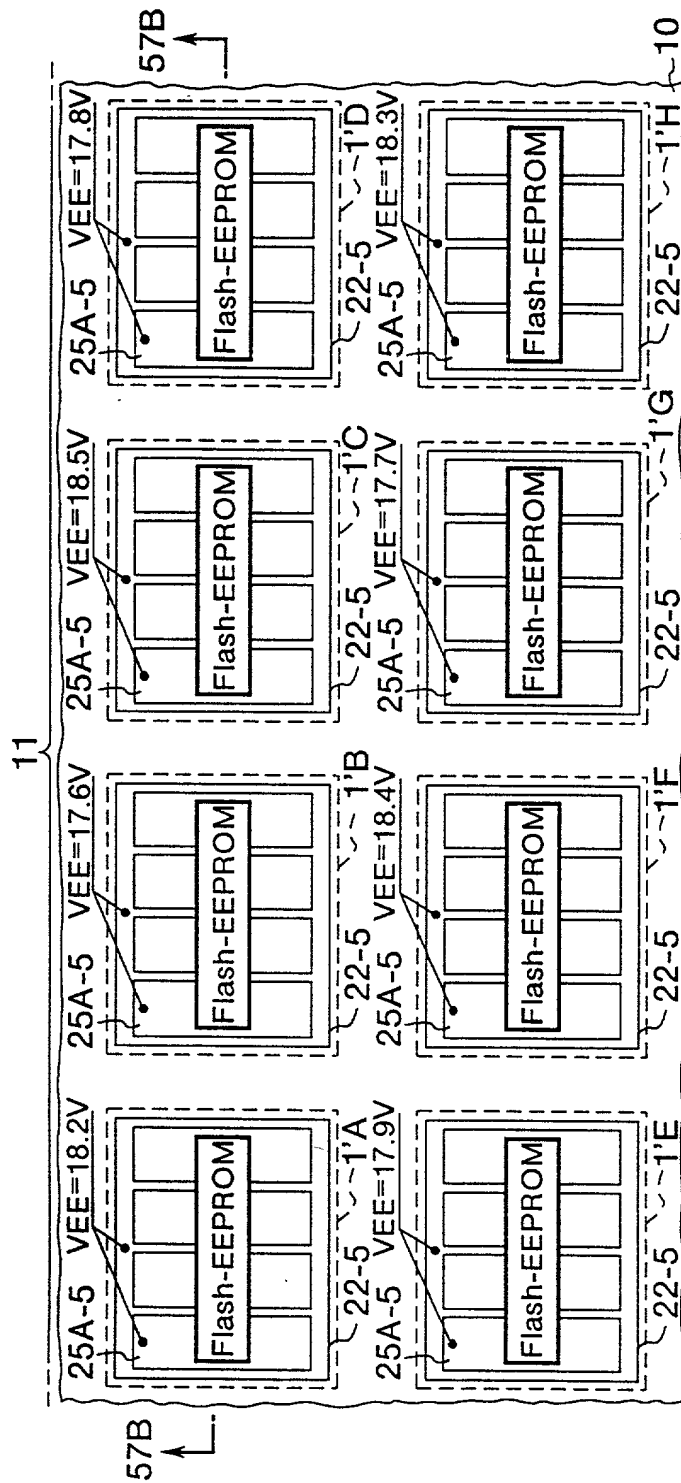


FIG. 57A

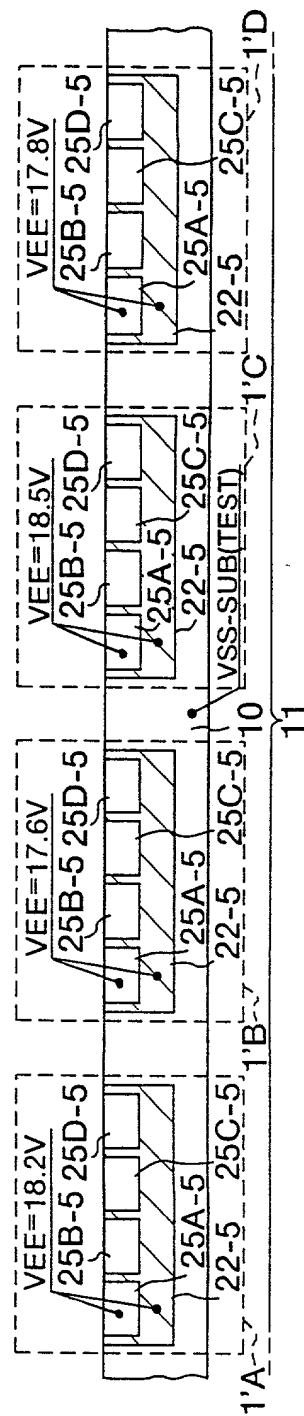


FIG. 57B

DECLARATION FOR PATENT APPLICATION

96S0874
5702/PD-5573

As a below named inventor, I declare:
that I verily believe myself to be the original, first and sole (if only one
individual inventor is listed below) or an original, first and joint inventor
(if more than one individual inventor is listed below) of the invention in

SEMICONDUCTOR INTEGRATED CIRCUIT DEVICE AND METHOD OF TESTING THE SAME

the specification of which is attached hereto unless the following box is
checked.

☐ was filed on _____ as United States Application
or PCT International Application No. _____, and
was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above
identified specification, including the claims, as amended by any amendment
referred to above.

I acknowledge the duty to disclose information of which is material to pat-
entability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365
(b) of any foreign application(s) for patent or inventor's certificate, or
35 U.S.C. 365(a) of any PCT International application which designated at
least one country other than the United States, listed below and have also
identified below any foreign application for patent or inventor's certifi-
cate, or PCT International application having a filing date before that of the
application on which priority is claimed:

Country	Category	Application No.	Filing Date	Priority Claim
Japan	Patent	8-136892	May 30, 1996	Yes
Japan	Patent	9-113900	May 1, 1997	Yes

And I hereby appoint Stuart Lubitz (Reg.No. 20,680), Richard H.
Zaitlen (Reg.No. 27,248), Alex Chartove (Reg.No. 31,942), David M. Simon
(Reg.No. 32,756), Jay M. Finkelstein (Reg.No. 21,082), Roger R. Wise
(Reg.No. 31,204), William K. Konrad (Reg.No. 28,868), Louis A. Mok (Reg.
No. 22,585), John P. Scherlacher (Reg.No. 23,009), Gary D. Mann (Reg.No.
34,867), Don F. Livornese (Reg.No. 32,040), Ted Rittmaster (Reg.No.
32,933), Paul H. Kovelman (Reg.No. 35,228), David L. Lubitz (Reg.No.
38,229), Paul G. Nagy (Reg.No. 37,896), Weining Yang (Reg.No. 38,690),
Chris P. Perque (Reg.No. 37,696), Joseph F. Vonsauers (Reg.No. 27,253),
Philippe O. Erwin (Reg.No. 38,132), David W. Victor (Reg.No. 39,867),
Jonathan Y. Kang (Reg.No. 38,199) and Randall C. Furlong (Reg.No.
35,144), each of whose address is 10100 Santa Mica Boulevard, Suite
2200, Los Angeles, California 90067-4164, or anyone of them, my
attorneys with full power of substitution and revocation to prosecute
this application and to transact all business in the Patent & Trademark
Office connected therewith, and request that correspondence be directed
to Loeb & Loeb LLP, 10100 Santa Monica Boulevard, Suite 2200,
Los Angeles, California 90067-4164.

Roger R. Wise

I declare further that all statements made herein of my own knowledge are
true and that all statements made on information and belief are believed to
be true; and further that these statements were made with the knowledge that
willful false statements and the like so made are punishable by fine or im-
prisonment, or both, under Section 1001 of Title 18 of the United States
Code and that such willful false statements may jeopardize the validity of
the application or any patent issued thereon.

DECLARATION FOR PATENT APPLICATION

96S0874
5702/PD-5573

I declare further that my post office address is at c/o
Intellectual Property Division, KABUSHIKI KAISHA TOSHIBA, 1-1 Shibaura
1-chome, Minato-ku, Tokyo 105, Japan; and
that my citizenship and residence are as stated below next to my name:

Inventor: (Signature)DateResidence*Tomomi Momohara*Date: MAY 23, 1997Tomomi MomoharaCitizen of: JapanYokohama-shi, JapanDate:Citizen of: JapanDate:Citizen of: JapanDate:Citizen of: JapanDate:Citizen of: JapanDate:Citizen of: JapanDate:Citizen of: JapanDate:Citizen of: Japan